


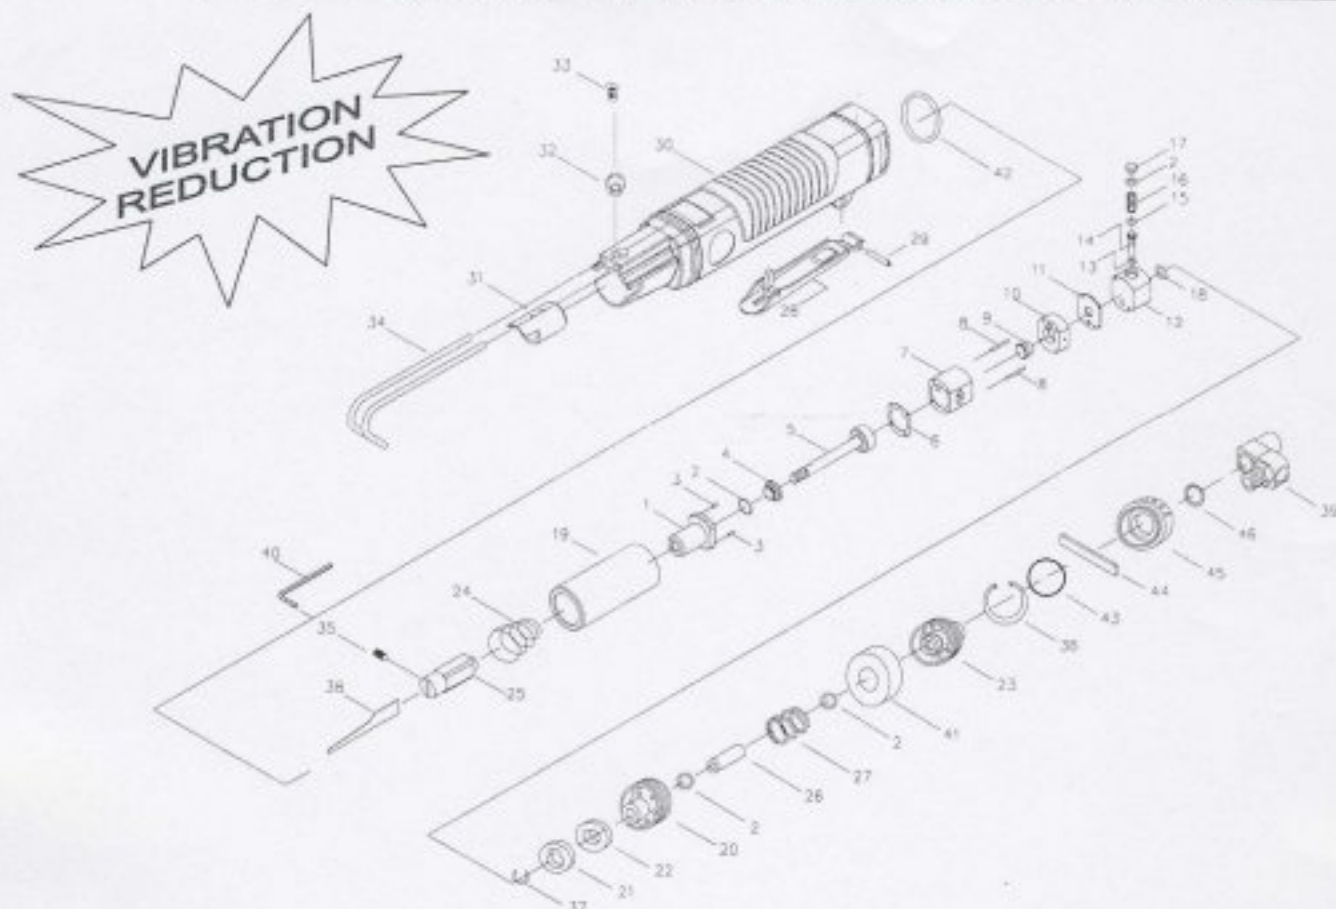

CSS311

Anti-Vibration Air Body Saw

TECHNICAL
DATA

Cutting Capacity-Thickness(Gauge)	: Steel 2.91 mm (9)
	: Alum. 3.26 mm(8)
Operating Air Pressure (Maximum)	: 6.3 Kg/Cm ² (90PSI)
Strokes Per Minute @90psi	: 9,500
Stroke Length	: 10 mm (13/32")
Avg. Air Consumption	: 3.18 CFM
Air Inlet (NPTF)	: 1/4"
Min. Hose Size	: 3/8" I.D.
Net Weight	: 0.7 kg
Overall Length	: 238 mm
Sound Pressure	: < 85 dBA
Vibration	: < 9 m/s ²
Standard Accessories Include	: 1 pc of 3mmHex Wrench
	: 1 each of 18T,24T &32T Saw Blade

PARTS LIST

Index	Part #	Description	Index	Part#	Description	Index	Part#	Description
1.	314403	Cylinder Head Ass'y	17.	314606	Valve Cap	33.	040706M	Screw
2.	OR0812	O-Ring (4)	18.	318203	Rubber Washer	34.	311704	Holder
3.	RP2006	Front Dowel Pin (2)	19.	318101	Main Liner	35.	061006	Set Screw
4.	314408	Bumper	20.	318211	Adaptor	36.	CH3538	Retaining Ring
5.	314422	Piston Ass'y	21.	318704	Muffler Cap	37.	EC1317	Retaining Ring
6.	314405	Gasket	22.	301709	Muffler	38.	314918Z	18T Saw Blade
7.	314401	Cylinder	23.	201702	Air Inlet		314924Z	24T Saw Blade
8.	RP2020	Rear Dowel Pin (2)	24.	318607	Shock Absorbent Spring		314932Z	32T Saw Blade
9.	314302	Automatic Valve	25.	316407M	Blade Holder Ass'y	39.	922A18	1/4"NPT Universal Swivel Air Inlet Joint (opt.)
10.	314311	Valve Chest	26.	315202	Connecting Hose	40.	314933	3mm Hex Wrench
11.	314303	Valve Seat	27.	315608	Spring	41.	315704	Muffler
12.	314222	Valve Case	28.	315801	Safety Lever Ass'y	42.	OR3035	O-RING
13.	OR0507	O-Ring	29.	SP3018	Spring Pin	43.	OR3034	O-Ring
14.	314612	Valve Stem	30.	311111	Body	44.	201705	Muffler
15.	OR0307	O-Ring	31.	314102	Sliding Linder	45.	201701	Exhaust Deflector
16.	318603	Spring	32.	315104	Spacer	46.	EH1620	Inverted Retaining Ring