

industrial painting

accessories for pumps



PET series

Paint Pressure Tanks



product details

- stainless steel container, polished inside
- PET 10 (10 liter), PET 30 (30 liter), PET 50 (50 liter)
- N: without pneumatic agitator
- MN: with pneumatic agitator
- second material connection (optional)
- no additional lubrication of drive required
- PET 50 N suitable for Euro-Hobbock
- all models conform to ATEX


technical details

paint pressure tank	
tank capacity	PET 10 N/ MN = 10 liter PET 30 N/ MN = 30 liter PET 50 N/ MN = 50 liter
weight without agitator	PET 10 N = 15,3 kg PET 30 N = 20,4 kg PET 50 N = 25,6 kg
weight with agitator	PET 10 MN = 17,5 kg PET 30 MN = 22,6 kg PET 50 MN = 28,2 kg
max operating pressure	7.0 bar
air inlet joint	G 1/4"M
fluid outlet joint	G 3/8"M
operating temperature	5-40 °C
dimensions (height x width)	PET 10 N/ MN = 540×330mm PET 30 N/ MN = 710×415mm PET 50 N/ MN = 810×470mm
pneumatic agitator	
operating pressure	1-1.5 bar
air consumption	15 liter/min.
max air inlet pressure	7.0 bar

order information

ANEST IWATA item	model
14972600	PET 10 N (without agitator)
14972630	PET 30 N (without agitator)
14972660	PET 50 N (without agitator)
14972620	PET 10 MN (with agitator)
14972650	PET 30 MN (with agitator)
14972680	PET 50 MN (with agitator)

Available at all authorized distributors of
ANEST IWATA Deutschland GmbH.

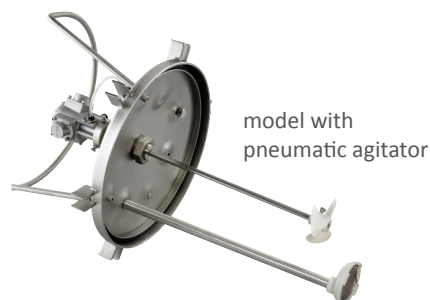

model with
pneumatic agitator

