





3/16"(4.8mm)

HEAVY DUTY AIR HYDRAULIC RIVETER



ITEM NO JAT-6034

ENERGY SAVING TYPE

ADDING OIL METHOD (一) (二)




ADJUSTING LENGTH



SPECIFICATIONS

Traction Power: 1045 kg.f (2304 LBS.F)
 Stroke Length: 16mm (0.63")
 Air Hose Size: 3/8" I.D.
 Air Inlet: 1/4" PT(NPT)
 Net Weight: 1.51 kgs (3.32 LBS)
 Air Consumption: 1.48 Liter/Stroke
 Air Pressure: 78 -85 PSI (5.5~6.0 kg/cm²)
 Capacity: 3/16", 5/32", 1/8", 3/32".

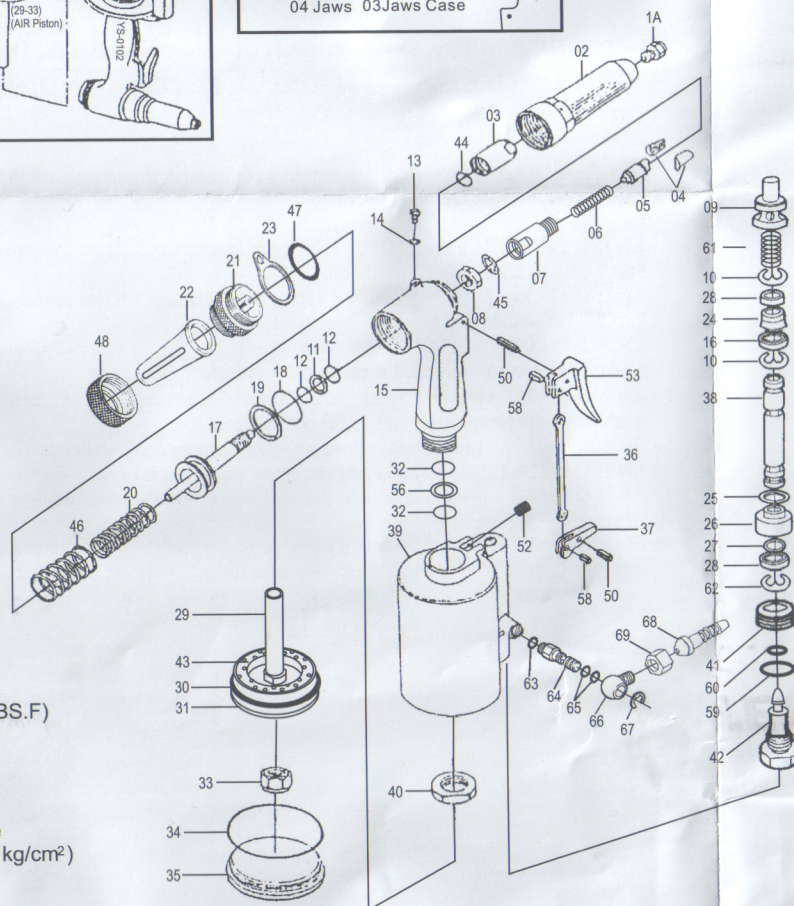

F.O.R. 1PC / PRICE

No.	Parts Name	Q'ty	Price	No.	Parts Name	Q'ty	Price
1A	Nose Piece 4.8m/m(3/16")	1		33	Lock Nut	1	
1B	Nose Piece 4.0m/m(5/32")	1		34	O Ring	1	
1C	Nose Piece 3.2m/m(1/8")	1		35	Cylinder Cap	1	
1D	Nose Piece 2.4m/m(3/32")	1		36	Trigger Rod	1	
02	Nose Housing 87L	1		37	Trigger Liver	1	
2L	Long Nose Housing 162L	★		38	Valve Tube	1	
03	Jaws Case Ahead	1		39	Air Cylinder	1	
04	Jaws (5 x 10)	2		40	Frame Lock Nut	1	
05	Jaw Pusher	1		41	Nipple Screw	1	
06	Jaw Case spring	1		42	End Plug	1	
07	Jaw Case Back Part	1		43	Rubber Cushion	1	
7L	Long Jaw Case Back Part	★		44	Jaw Case O Ring	1	
08	Jaw Case Lock Nut	1		45	Washer Ring	1	
09	Valve Pusher	1		46	Return Spring (Big)	1	
10	E Ring	2		47	Frame Cap Ring	1	
11	Back Up Ring	1		48	Safety Cap Nut	1	
12	O Ring	2		49	Bolt Plug	1	
13	Air Blow Plug	1		50	Pin	1	
14	Packing Seal	1		52	Lock Screw	1	
15	Frame	1		53	Trigger (Long)	1	
16	Collar for Valve Tube	1		53A	Trigger (Short)	★	
17	Oil Piston	1		54	Spanner Gauge	1	
18	O Ring	1		55	Spanner	1	
19	Back Up Ring	1		56	Back-Up Ring	1	
20	Return Spring (Small)	1		57	Hex Wrench	1	
21	Frame Cap	1		58	Trigger Pin	2	
22	Safety Cap	1		59	O Ring	1	
23	Hanger Clip	1		60	Seal	1	
24	Air Valve Seal	1		61	Pusher Spring	1	
25	O Ring	1		62	E Ring	1	
26	Valve Seat	1		63			
27	O Ring	1		67	YS-0046A, YS-0046B.	★	
28	Valve Collar Washer	2		68	AIR HOSE JOINT 5/16"	★	
29	Air Piston Rod	1		69	AIR HOSE JOWT NUT 1/4"	★	
30	O Ring	1		70	OUTER THREAD JOINT PM20	★	
31	Air Piston	1		71	INNER THREAD JOINT PF20	★	
32	O Ring	2			INNER THREAD JOINT PF	★	

★ Optional Accessories

※ PLEASE ALWAYS ENSURE THE PART No. 13 AIR BLOW PLUG TIGHT THREADED.