




SUNMAKE INDUSTRIAL CO., LTD.



Model 型式 AT-5(FG)  
(Litters)Capacity 4L  
Agitating style 攪拌方式 None  
Net WT(kg) 機械淨重 5.9  
Gross WT(kg) 機械毛重 6.3  
CUFT (L/W/H) 尺寸 0.9才 242/212/520

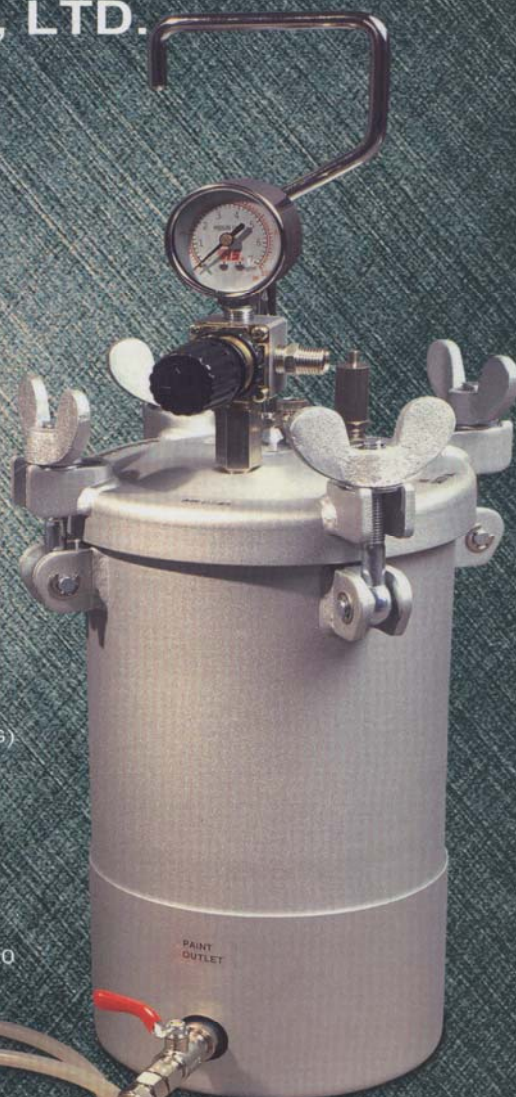

Model 型號 Y816膠槍  
Net WT(kg) 機械淨重 0.4/1pc  
Gross WT(kg) 機械毛重 0.5/1pc  
CUFT (L/W/H) 尺寸 0.8才/20pcs 400/255/200



# 壓力桶系列



Model 型式 AT-5HT  
(Litters)Capacity 容量 4L  
Agitating style 攪拌方式 None  
Net WT(kg) 機械淨重 5.6  
Gross WT(kg) 機械毛重 6.1  
CUFT (L/W/H) 才桶長/寬/高(mm) 0.6才 212/212/480



Model 型式 AT-10E  
(Litters)Capacity 容量 10L  
Agitating style 攪拌方式 None  
Net WT(kg) 機械淨重 13  
Gross WT(kg) 機械毛重 14.2  
CUFT (L/W/H) 才桶長/寬/高(mm) 1.6才 306/306/495



Model 型式 AT-10M  
(Litters)Capacity 容量 10L  
Agitating style 攪拌方式 Manual  
Net WT(kg) 機械淨重 15  
Gross WT(kg) 機械毛重 16.2  
CUFT (L/W/H) 才桶長/寬/高(mm) 1.8才 306/306/612



Model 型式 AT-10A  
(Litters)Capacity 容量 10L  
Agitating style 攪拌方式 Air Motor  
Net WT(kg) 機械淨重 16.5  
Gross WT(kg) 機械毛重 17.7  
CUFT (L/W/H) 才桶長/寬/高(mm) 1.8才 306/306/572



Model 型式 AT-20M, AT-40M, AT-60M, AT-80M  
(Litters)Capacity 容量 20L, 40L, 60L, 80L  
Agitating style 攪拌方式 Manual  
Net WT(kg) 機械淨重 23, 1.28, 31.6, 38.7  
Gross WT(kg) 機械毛重 25.7, 28.8, 35.4, 42.1  
CUFT (L/W/H) 才桶長/寬/高(mm) 3.7才, 4.5才, 7.5才, 8.5才


Special Capacity Also Available



Model 型式 AT-20A, AT-40A, AT-60A, AT-80A  
(Litters)Capacity 容量 20L, 40L, 60L, 80L  
Agitating style 攪拌方式 Air Motor  
Net WT(kg) 機械淨重 24.5, 27.3, 33.4, 40  
Gross WT(kg) 機械毛重 27.3, 30.4, 36.4, 43.4  
CUFT (L/W/H) 才桶長/寬/高(mm) 3.7才, 4.5才, 7.5才, 8.5才

Special Capacity Also Available



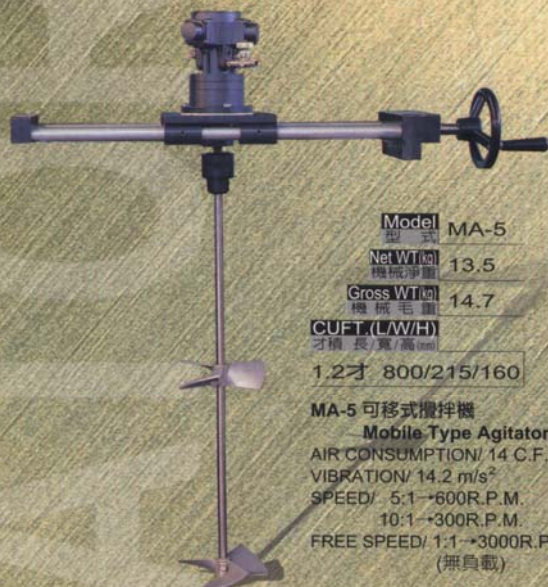


Model 型式 MA-5  
Net WT(kg) 機械淨重 13.5  
Gross WT(kg) 機械毛重 14.7  
CUFT (L/W/H) 才桶 長/寬/高(mm) 1.2才 800/215/160

MA-5 可移式攪拌機  
Mobile Type Agitator  
AIR CONSUMPTION/ 14 C.F.M.  
VIBRATION/ 14.2 m/s<sup>2</sup>  
SPEED/ 5:1→600R.P.M.  
10:1→300R.P.M.  
FREE SPEED/ 1:1→3000R.P.M.  
(無負載)



Model 型式 HA-1  
Net WT(kg) 機械淨重 4.6  
Gross WT(kg) 機械毛重 5.1  
CUFT (L/W/H) 才桶 長/寬/高(mm) 0.8才 940/220/150

HA-1 手持式攪拌機  
Portable Type Agitator  
AIR CONSUMPTION/ 14 C.F.M.  
VIBRATION/ 12.3 m/s<sup>2</sup>  
FREE SPEED/ 1:1→3000R.P.M.  
(無負載)

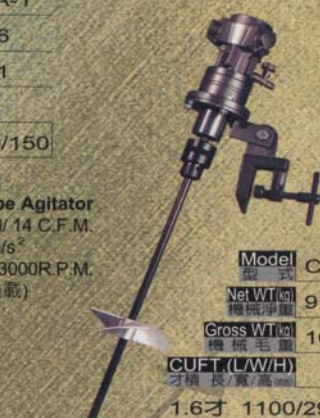

Model 型式 CA-5  
Net WT(kg) 機械淨重 9  
Gross WT(kg) 機械毛重 10  
CUFT (L/W/H) 才桶 長/寬/高(mm) 1.6才 1100/290/150

CA-5 夾式攪拌機  
Clamping Type Agitator  
AIR CONSUMPTION/ 14 C.F.M.  
VIBRATION/ 12.3 m/s<sup>2</sup>  
SPEED/ 5:1→600R.P.M.  
10:1→300R.P.M.  
FREE SPEED/ 1:1→3000R.P.M.  
(無負載)



Model 型式 FA-1  
Net WT(kg) 機械淨重 8.6  
Gross WT(kg) 機械毛重 9.8  
CUFT (L/W/H) 才桶 長/寬/高(mm) 1.8才 470/450/750

FA-1 架式攪拌機  
Frame Type Agitator  
AIR CONSUMPTION/ 14 C.F.M.  
VIBRATION/ 12.3 m/s<sup>2</sup>  
FREE SPEED/ 1:1→3000R.P.M.  
(無負載)



Model 型式 CA-1  
Net WT(kg) 機械淨重 7  
Gross WT(kg) 機械毛重 8  
CUFT (L/W/H) 才桶 長/寬/高(mm) 1.6才 1100/290/150

CA-1 夾式攪拌機  
Clamping Type Agitator  
AIR CONSUMPTION/ 14 C.F.M.  
VIBRATION/ 12.3 m/s<sup>2</sup>  
SPEED/ 5:1→600R.P.M.  
10:1→300R.P.M.  
FREE SPEED/ 1:1→3000R.P.M.  
(無負載)



Model 型式 FA-5  
Net WT(kg) 機械淨重 9.3  
Gross WT(kg) 機械毛重 10.5  
CUFT (L/W/H) 才桶 長/寬/高(mm) 1.8才 470/450/750

FA-5 架式攪拌機  
Clamping Type Agitator  
AIR CONSUMPTION/ 14 C.F.M.  
VIBRATION/ 12.3 m/s<sup>2</sup>  
SPEED/ 5:1→600R.P.M.  
10:1→300R.P.M.  
FREE SPEED/ 1:1→3000R.P.M.  
(無負載)



Model 型式 HA-5  
Net WT(kg) 機械淨重 5.8  
Gross WT(kg) 機械毛重 6.3  
CUFT (L/W/H) 才桶 長/寬/高(mm) 0.8才 940/220/150

HA-5 手持式攪拌機  
Portable Type Agitator  
AIR CONSUMPTION/ 14 C.F.M.  
VIBRATION/ 12.3 m/s<sup>2</sup>  
SPEED/ 5:1→600R.P.M.  
10:1→300R.P.M.  
FREE SPEED/ 1:1→3000R.P.M.  
(無負載)



Model 型式 FA-7  
Net WT(kg) 機械淨重 5.6  
Gross WT(kg) 機械毛重 6.8  
CUFT (L/W/H) 才桶 長/寬/高(mm) 1.6才 1100/290/150

FA-7 氣動式攪拌機  
Auto Type Agitator  
AIR CONSUMPTION/ 14 C.F.M.  
VIBRATION/ 12.3 m/s<sup>2</sup>  
SPEED/ 5:1→600R.P.M.  
10:1→300R.P.M.  
FREE SPEED/ 1:1→3000R.P.M.  
(無負載)





Model 型 式 DP-3  
Net WT(kg) 機 械 淨 重 8.6  
Gross WT(kg) 機 械 毛 重 9.8  
CUFT.(L/W/H)  
才 槓 長 / 寬 / 高 (mm) 2.4才 420/410/810



Model 型 式 DP-9  
Net WT(kg) 機 械 淨 重 22  
Gross WT(kg) 機 械 毛 重 25  
CUFT.(L/W/H)  
才 槓 長 / 寬 / 高 (mm) 3.2才 1015/215/405



Model 型 式 DP-7  
Net WT(kg) 機 械 淨 重 25.2  
Gross WT(kg) 機 械 毛 重 28  
CUFT.(L/W/H)  
才 槓 長 / 寬 / 高 (mm) 5才 785/380/560



Model 型 式 DP-5  
Net WT(kg) 機 械 淨 重 13.8  
Gross WT(kg) 機 械 毛 重 15.3  
CUFT.(L/W/H)  
才 槓 長 / 寬 / 高 (mm) 3才 470/450/870



Model 型 式 APH-816  
Net WT(kg) 機 械 淨 重 10.7/100m  
Gross WT(kg) 機 械 毛 重 12/100m  
CUFT.(L/W/H)  
才 槓 長 / 寬 / 高 (mm) 2才/100m



噴槍清潔組  
Model 型 式 H813W



噴槍清潔組  
Model 型 式 H814W



SUNMAKE INDUSTRIAL CO., LTD.

2FL, NO.14, ALLEY 11, LANE 177, YEN HO RD.

TUCHENG CITY 236, TAIPEI HSIEN, TAIWAN

TEL:+886-2-22701699 FAX:+886-2-22666930

E-MAIL:proandy@ms61.hinet.net





STAINLESS

# HIGH PERFORMANCE STAINLESS STEEL PRESSURE TANK

**Certificates:**

- ISO 9001:2000
- PED
- CE 0035

**2-1/2 GALLON ( 10 LITER ) STAINLESS STEEL PRESSURE TANKS**

**AT-10HSS**

**AT-10AHSS**



**AT-10HSS**

2-1/2 GALLON (10 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
NO AGITATOR

**AT-10AHSS**

2-1/2 GALLON (10 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
AIR AGITATOR

**AT-10MHSS**

2-1/2 GALLON (10 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
MANUAL AGITATOR

**AT-10ESS****HOT**

2-1/2 GALLON (10 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
NO AGITATOR

**AT-10ASS****HOT**

2-1/2 GALLON (10 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
AIR AGITATOR

**AT-10MSS****HOT**

2-1/2 GALLON (10 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
MANUAL AGITATOR



| Model     | Capacity | Work Pressure    | Tank Lid                                  | Tank Body                                              | L   | W   | H   | Net WT. | Gross WT. | CUFT. |
|-----------|----------|------------------|-------------------------------------------|--------------------------------------------------------|-----|-----|-----|---------|-----------|-------|
| AT-10HSS  | 10L      | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 279 mm<br>O.D.: 287 mm | T: 2.0 mm<br>H: 246 mm<br>I.D.: 265 mm<br>O.D.: 276 mm | 290 | 290 | 456 | 11.4    | 12.6      | 1.6   |
| AT-10AHSS | 10L      | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 279 mm<br>O.D.: 287 mm | T: 2.0 mm<br>H: 246 mm<br>I.D.: 265 mm<br>O.D.: 276 mm | 290 | 290 | 516 | 13.7    | 14.9      | 1.8   |
| AT-10MHSS | 10L      | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 279 mm<br>O.D.: 287 mm | T: 2.0 mm<br>H: 246 mm<br>I.D.: 265 mm<br>O.D.: 276 mm | 290 | 290 | 516 | 15.3    | 16.5      | 1.8   |
| AT-10ESS  | 10L      | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 279 mm<br>O.D.: 287 mm | T: 2.0 mm<br>H: 220 mm<br>I.D.: 265 mm<br>O.D.: 276 mm | 290 | 290 | 485 | 12.0    | 13.1      | 1.6   |
| AT-10ASS  | 10L      | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 279 mm<br>O.D.: 287 mm | T: 2.0 mm<br>H: 220 mm<br>I.D.: 265 mm<br>O.D.: 276 mm | 290 | 290 | 540 | 15.8    | 17.0      | 1.8   |
| AT-10MSS  | 10L      | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 279 mm<br>O.D.: 287 mm | T: 2.0 mm<br>H: 220 mm<br>I.D.: 265 mm<br>O.D.: 276 mm | 290 | 290 | 540 | 14.2    | 15.4      | 1.8   |

## STAINLESS STEEL PRESSURE TANKS APPLICATIONS & ADVANTAGES

- The pressure tank shell is constructed with stainless steel in one piece. The tank lid and all material-conveying parts are also supplied in stainless steel. It is designed for use with high-viscosity materials, abrasive materials and waterborne materials.
- Two kinds of fluid outlets are available, either at top or bottom. Bottom fluid outlet is recommended

STAINLESS

SS



- Two kinds of fluid outlets are available, either at top or bottom. Bottom fluid outlet is recommended for heavy viscous materials.
- Pressure tank is equipped with air agitator or manual agitator. Agitator blade is made of stainless steel.
- A variety of tanks are available for your finishing needs.
- Max. Working Pressure: 4.1 Bar (60 Psi)
- Applied for :
  - ☞ Waterborne
  - ☞ Glue
  - ☞ High-Viscosity
  - ☞ Acid Chemicals
  - ☞ Alkaline Chemicals
  - ☞ All Common Solvent Based Paints

## 1/2 GALLON (2 LITER ) STAINLESS STEEL PRESSURE TANKS

### AT-2ESS

1/2 GALLON (2 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
NO AGITATOR



### AT-2E(FG)SS

1/2 GALLON (2 LITER )  
STAINLESS STEEL  
PRESSURE TANK  
BOTTOM FLUID OUTLET  
NO AGITATOR



**HOT**

### AT-2ASS

1/2 GALLON (2 LITER )  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
AIR AGITATOR



### AT-2A(FG)SS

1/2 GALLON (2 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
BOTTOM FLUID OUTLET  
AIR AGITATOR



**HOT**

| Model       | Capacity | Work Pressure    | Tank Lid                                  | Tank Body                                              | L   | W   | H   | Net WT. | Gross WT. | CUFT. |
|-------------|----------|------------------|-------------------------------------------|--------------------------------------------------------|-----|-----|-----|---------|-----------|-------|
| AT-2ESS     | 2L       | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 174 mm<br>O.D.: 182 mm | T: 2.0 mm<br>H: 184 mm<br>I.D.: 161 mm<br>O.D.: 172 mm | 180 | 180 | 445 | 4.8     | 5.3       | 0.5   |
| AT-2E(FG)SS | 2L       | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 174 mm<br>O.D.: 182 mm | T: 2.0 mm<br>H: 248 mm<br>I.D.: 161 mm<br>O.D.: 172 mm | 180 | 180 | 488 | 5.2     | 5.7       | 0.7   |
| AT-2ASS     | 2L       | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 174 mm<br>O.D.: 182 mm | T: 2.0 mm<br>H: 184 mm<br>I.D.: 161 mm<br>O.D.: 172 mm | 180 | 180 | 426 | 6.3     | 6.8       | 0.5   |
| AT-2A(FG)SS | 2L       | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 174 mm<br>O.D.: 182 mm | T: 2.0 mm<br>H: 248 mm<br>I.D.: 161 mm<br>O.D.: 172 mm | 180 | 180 | 493 | 6.9     | 7.4       | 0.7   |

## 1 GALLON (4 LITER ) STAINLESS STEEL PRESSURE TANKS





## AT-5ESS

1 GALLON (4 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
NO AGITATOR

**HOT**



## AT-5E(FG)SS

1 GALLON (4 LITER )  
STAINLESS STEEL  
PRESSURE TANK  
BOTTOM FLUID OUTLET  
NO AGITATOR

**HOT**



## AT-5ASS

1 GALLON (4 LITER )  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
AIR AGITATOR

**HOT**



## AT-5A(FG)SS

1 GALLON (4 LITER )  
STAINLESS STEEL  
PRESSURE TANK  
BOTTOM FLUID OUTLET  
AIR AGITATOR

**HOT**



| Model       | Capacity | Work Pressure    | Tank Lid                                  | Tank Body                                              | L   | W   | H   | Net WT. | Gross WT. | CUFT. |
|-------------|----------|------------------|-------------------------------------------|--------------------------------------------------------|-----|-----|-----|---------|-----------|-------|
| AT-5ESS     | 4L       | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 174 mm<br>O.D.: 182 mm | T: 2.0 mm<br>H: 227 mm<br>I.D.: 161 mm<br>O.D.: 172 mm | 180 | 180 | 480 | 5.3     | 5.9       | 0.7   |
| AT-5E(FG)SS | 4L       | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 174 mm<br>O.D.: 182 mm | T: 2.0 mm<br>H: 295 mm<br>I.D.: 161 mm<br>O.D.: 172 mm | 180 | 180 | 515 | 6.0     | 6.6       | 0.95  |
| AT-5ASS     | 4L       | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 174 mm<br>O.D.: 182 mm | T: 2.0 mm<br>H: 227 mm<br>I.D.: 161 mm<br>O.D.: 172 mm | 180 | 180 | 471 | 4.8     | 5.3       | 0.5   |
| AT-5A(FG)SS | 4L       | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 174 mm<br>O.D.: 182 mm | T: 2.0 mm<br>H: 295 mm<br>I.D.: 161 mm<br>O.D.: 172 mm | 180 | 180 | 538 | 7.3     | 8.0       | 0.8   |

STAINLESS

## 5 GALLON (20 LITER) STAINLESS STEEL PRESSURE TANKS

### AT-20HSS

5 GALLON (20 LITER )  
STAINLESS STEEL  
PRESSURE TANK



### AT-20ESS

5 GALLON (20 LITER )  
STAINLESS STEEL  
PRESSURE TANK



ESS



STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
NO AGITATOR



STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
NO AGITATOR



**HOT**

### AT-20AHSS

5 GALLON ( 20 LITER )  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
AIR AGITATOR



### AT-20ASS

5 GALLON (20 LITER )  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
AIR AGITATOR



**HOT**

### AT-20MHSS

5 GALLON (20 LITER )  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
MANUAL AGITATOR



### AT-20MSS

5 GALLON (20 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
MANUAL AGITATOR



**HOT**

| Model     | Capacity | Work Pressure    | Tank Lid                                | Tank Body                                              | L   | W   | H   | Net WT. | Gross WT. | CUFT. |
|-----------|----------|------------------|-----------------------------------------|--------------------------------------------------------|-----|-----|-----|---------|-----------|-------|
| AT-20HSS  | 20L      | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 334 mm<br>O.D.: 344 mm | T: 2.0 mm<br>H: 421 mm<br>I.D.: 317 mm<br>O.D.: 327 mm | 410 | 325 | 736 | 19.4    | 21.4      | 3.7   |
| AT-20AHSS | 20L      | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 334 mm<br>O.D.: 344 mm | T: 2.0 mm<br>H: 421 mm<br>I.D.: 317 mm<br>O.D.: 327 mm | 410 | 325 | 736 | 22.8    | 24.7      | 3.7   |
| AT-20MHSS | 20L      | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 334 mm<br>O.D.: 344 mm | T: 2.0 mm<br>H: 421 mm<br>I.D.: 317 mm<br>O.D.: 327 mm | 410 | 325 | 736 | 21.6    | 23.6      | 3.7   |
| AT-20ESS  | 20L      | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 334 mm<br>O.D.: 344 mm | T: 2.0 mm<br>H: 395 mm<br>I.D.: 317 mm<br>O.D.: 327 mm | 410 | 325 | 710 | 19.4    | 21.4      | 3.7   |
| AT-20ASS  | 20L      | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 334 mm<br>O.D.: 344 mm | T: 2.0 mm<br>H: 395 mm<br>I.D.: 317 mm<br>O.D.: 327 mm | 410 | 325 | 710 | 22.8    | 24.7      | 3.7   |
| AT-20MSS  | 20L      | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 334 mm<br>O.D.: 344 mm | T: 2.0 mm<br>H: 395 mm<br>I.D.: 317 mm<br>O.D.: 327 mm | 410 | 325 | 710 | 21.6    | 23.6      | 3.7   |

## 12-1/2 GALLON (50 LITER) STAINLESS STEEL PRESSURE TANKS

### AT-50ESS

12-1/2 GALLON (50 LITER )  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET



### AT-50E(FG)SS

12-1/2 GALLON (50 LITER )  
STAINLESS STEEL  
PRESSURE TANK  
BOTTOM FLUID OUTLET



STAINLESS

LESS



TOP FLUID OUTLET  
NO AGITATOR



BOTTOM FLUID OUTLET  
NO AGITATOR



STAINLESS

### AT-50ASS

12-1/2 GALLON (50 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
AIR AGITATOR



### AT-50A(FG)SS

12-1/2 GALLON (50 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
BOTTOM FLUID OUTLET  
AIR AGITATOR



### AT-50MSS

12-1/2 GALLON (50 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
TOP FLUID OUTLET  
MANUAL AGITATOR



### AT-50M(FG)SS

12-1/2 GALLON (50 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
BOTTOM FLUID OUTLET  
MANUAL AGITATOR



| Model        | Capacity | Work Pressure    | Tank Lid                                | Tank Body                                              | L   | W   | H   | Net WT. | Gross WT. | CUFT. |
|--------------|----------|------------------|-----------------------------------------|--------------------------------------------------------|-----|-----|-----|---------|-----------|-------|
| AT-50ESS     | 50L      | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 390 mm<br>O.D.: 401 mm | T: 2.0 mm<br>H: 470 mm<br>I.D.: 370 mm<br>O.D.: 378 mm | 475 | 470 | 815 | 23.3    | 26.1      | 6.8   |
| AT-50ASS     | 50L      | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 390 mm<br>O.D.: 401 mm | T: 2.0 mm<br>H: 470 mm<br>I.D.: 370 mm<br>O.D.: 378 mm | 475 | 470 | 815 | 27.5    | 30.3      | 6.8   |
| AT-50MSS     | 50L      | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 390 mm<br>O.D.: 401 mm | T: 2.0 mm<br>H: 470 mm<br>I.D.: 370 mm<br>O.D.: 378 mm | 475 | 470 | 815 | 25.5    | 28.3      | 6.8   |
| AT-50E(FG)SS | 50L      | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 390 mm<br>O.D.: 401 mm | T: 2.0 mm<br>H: 590 mm<br>I.D.: 372 mm<br>O.D.: 382 mm | 475 | 470 | 945 | 24.2    | 27.3      | 7.8   |
| AT-50A(FG)SS | 50L      | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 390 mm<br>O.D.: 401 mm | T: 2.0 mm<br>H: 590 mm<br>I.D.: 372 mm<br>O.D.: 382 mm | 475 | 470 | 945 | 28.0    | 31.1      | 7.8   |
| AT-50M(FG)SS | 50L      | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 390 mm<br>O.D.: 401 mm | T: 2.0 mm<br>H: 590 mm<br>I.D.: 372 mm<br>O.D.: 382 mm | 475 | 470 | 945 | 26.1    | 29.2      | 7.8   |

## 2-1/2 GALLON (10 LITER) - 5 GALLON (20 LITER) DOME TYPE STAINLESS STEEL PRESSURE TANKS

### AT-10E(FG)SS

2-1/2 GALLON (10 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
BOTTOM FLUID OUTLET  
NO AGITATOR



### AT-20E(FG)SS

5 GALLON (20 LITER)  
STAINLESS STEEL  
PRESSURE TANK  
BOTTOM FLUID OUTLET  
NO AGITATOR



STAINLESS



BOTTOM FLUID OUTLET  
NO AGITATOR

BOTTOM FLUID OUTLET  
NO AGITATOR

## AT-10A(FG)SS

2-1/2 GALLON (10 LITER )  
STAINLESS STEEL  
PRESSURE TANK  
BOTTOM FLUID OUTLET  
AIR AGITATOR



## AT-20A(FG)SS

5 GALLON (20 LITER )  
STAINLESS STEEL  
PRESSURE TANK  
BOTTOM FLUID OUTLET  
AIR AGITATOR



**HOT**

## AT-10M(FG)SS

2-1/2 GALLON (10 LITER )  
STAINLESS STEEL  
PRESSURE TANK  
BOTTOM FLUID OUTLET  
MANUAL AGITATOR



## AT-20M(FG)SS

5 GALLON (20 LITER )  
STAINLESS STEEL  
PRESSURE TANK  
BOTTOM FLUID OUTLET  
MANUAL AGITATOR



**HOT**

| Model        | Capacity | Work Pressure    | Tank Lid                                  | Tank Body                                              | L   | W   | H   | Net WT. | Gross WT. | CUFT. |
|--------------|----------|------------------|-------------------------------------------|--------------------------------------------------------|-----|-----|-----|---------|-----------|-------|
| AT-10E(FG)SS |          | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 279 mm<br>O.D.: 287 mm | T: 2.0 mm<br>H: 358 mm<br>I.D.: 265 mm<br>O.D.: 276 mm | 290 | 290 | 605 | 13.5    | 14.7      | 2.0   |
| AT-10A(FG)SS |          | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 279 mm<br>O.D.: 287 mm | T: 2.0 mm<br>H: 358 mm<br>I.D.: 265 mm<br>O.D.: 276 mm | 290 | 290 | 690 | 17.1    | 18.3      | 2.3   |
| AT-10M(FG)SS |          | 4.1 bar (60 psi) | T: 3.5 mm<br>I.D.: 279 mm<br>O.D.: 287 mm | T: 2.0 mm<br>H: 358 mm<br>I.D.: 265 mm<br>O.D.: 276 mm | 290 | 290 | 690 | 15.7    | 16.9      | 2.3   |
| AT-20E(FG)SS |          | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 334 mm<br>O.D.: 344 mm   | T: 2.0 mm<br>H: 532 mm<br>I.D.: 317 mm<br>O.D.: 327 mm | 410 | 325 | 840 | 20.4    | 22.3      | 4.5   |
| AT-20A(FG)SS |          | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 334 mm<br>O.D.: 344 mm   | T: 2.0 mm<br>H: 532 mm<br>I.D.: 317 mm<br>O.D.: 327 mm | 410 | 325 | 840 | 24.0    | 25.9      | 4.5   |
| AT-20M(FG)SS |          | 4.1 bar (60 psi) | T: 5 mm<br>I.D.: 334 mm<br>O.D.: 344 mm   | T: 2.0 mm<br>H: 532 mm<br>I.D.: 317 mm<br>O.D.: 327 mm | 410 | 325 | 840 | 22.7    | 24.6      | 4.5   |


## DOUBLE DIAPHRAGM PUMPS & AGITATORS

### DP-1SS

STAINLESS STEEL  
DOUBLE DIAPHRAGM PUMP

- Pressure ratio 1:1
- Paint Tank Volume: 4-200 L
- Transmitting Capacity : 5 L /min(0.4kg/cm<sup>2</sup>)  
7.5 L /min(1kg/cm<sup>2</sup>)  
10.5 L /min(2kg/cm<sup>2</sup>)
- Used Air Pressure: 1-5 kg/cm<sup>2</sup>
- Max. Painting Pressure: 5 kg/cm<sup>2</sup>

- Max. Pump Speed: 160 times/min (5 kg/cm<sup>2</sup>)
- Min. Pump Speed: 80 times/min (0.4 kg/cm<sup>2</sup>)
- Net Weight: 10 kgs
- Gross Weight : 11.2 kgs
- CUFT: 2
- L : 36mm /M : 32 mm/H: 760mm

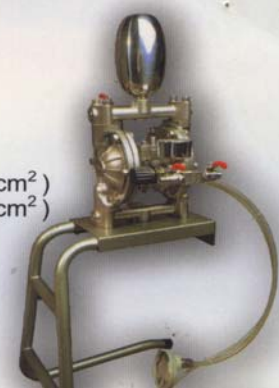



## DP-1SS

### STAINLESS STEEL DOUBLE DIAPHRAGM PUMP

- ▶ Pressure ratio 1:1
- ▶ Paint Tank Volume: 4-200 L
- ▶ Transmitting Capacity : 5 L /min(0.4kg/cm<sup>2</sup>)  
7.5 L /min(1kg/cm<sup>2</sup>)  
10.5 L /min(2kg/cm<sup>2</sup>)
- ▶ Used Air Pressure: 1-5 kg/cm<sup>2</sup>
- ▶ Max. Painting Pressure: 5 kg/cm<sup>2</sup>

- ▶ Max. Pump Speed: 160 times/min (5 kg/cm<sup>2</sup>)
- ▶ Min. Pump Speed: 80 times/min (0.4 kg/cm<sup>2</sup>)
- ▶ Net Weight: 10 kgs
- ▶ Gross Weight : 11.2 kgs
- ▶ CUFT: 2
- ▶ L : 36mm /M : 32 mm/H: 760mm



## FA-3S

### AIR AGITATOR w/STAINLESS STEEL SHAFT & BLADE

L: 82mm W: 82mm H: 440mm  
Net Weight : 1 kg  
Gross Weight : 1.1 kg  
CUFT: 0.13



## SP-01

### STAINLESS STEEL AGITATING PROPELLER

I.D: 15 mm  
O.D: 60 mm



## SP-02

### STAINLESS STEEL AGITATING PROPELLER

I.D: 15 mm  
O.D: 107 mm



## LA-5

### AIR AGITATOR w/5 GALLON(20 LITER) STAINLESS STEEL DRUM COVER



## SP-03

### STAINLESS STEEL AGITATING PROPELLER

I.D: 15 mm  
O.D: 180 mm



## LA-55

### AIR AGITATOR w/50 GALLON(200 LITER) STAINLESS STEEL DRUM COVER



## TSP-1

### STAINLESS STEEL AGITATING PROPELLER

I.D: 15 mm  
O.D: 167 mm



## Manufacture and Export of Professional Tools SUNMAKE INDUSTRIAL CO., LTD.

2nd FL., -3, 158 Kancheng Rd., Panchiao City, Taipei  
Hsien, Taiwan

Tel no: 886-2-29504785

Fax no: 886-2-89533145

E-mail: sales@sunmaketools.com.tw

sales@sunmake.com.tw

STAINLESS