


PREBENA®

**COMPRESSED AIR...
ALWAYS A STEP AHEAD**

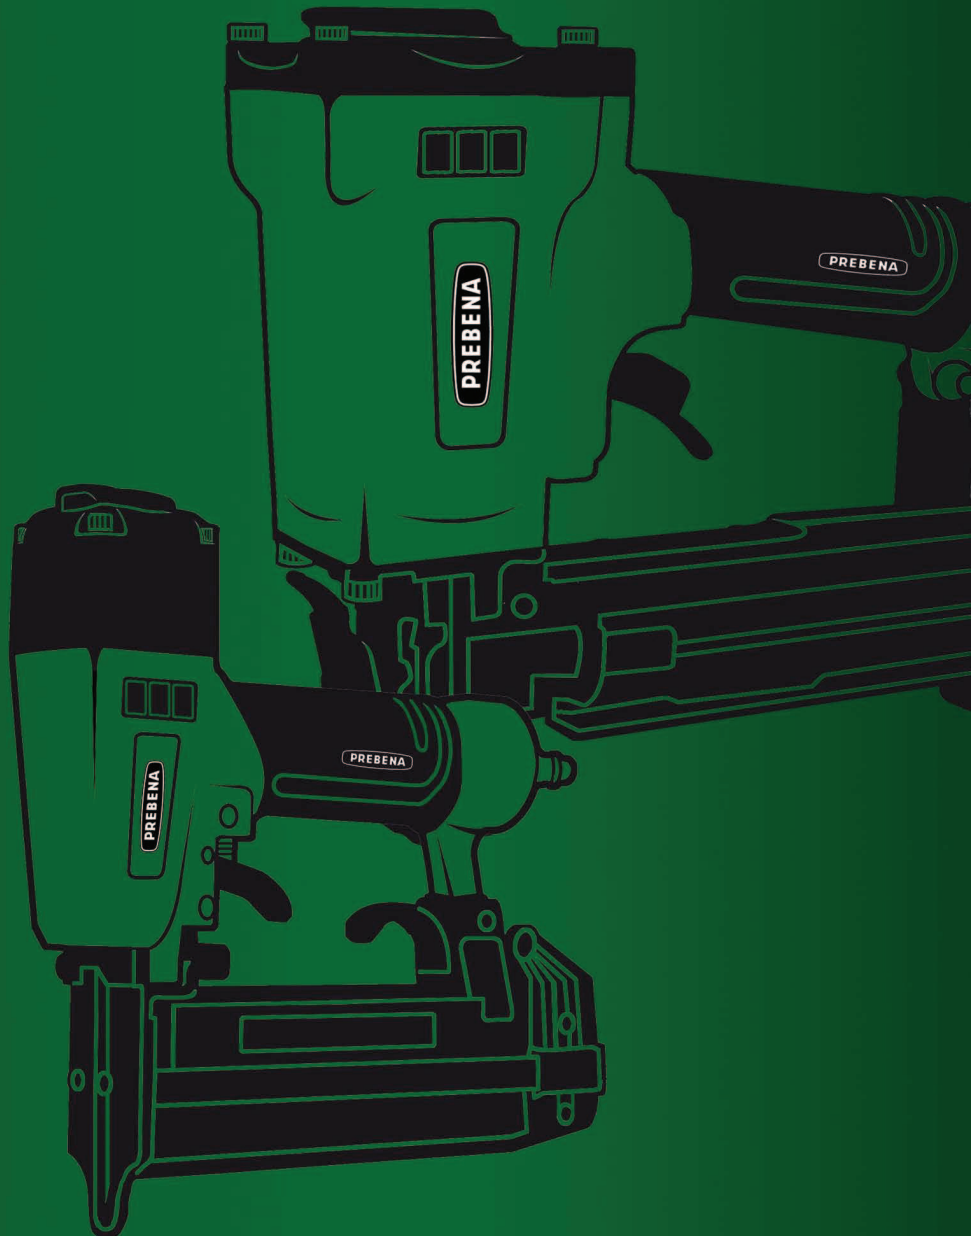

**Pneumatic nailer
and stapler for craftsmen**

Cordless Air Nailer PKT-2-J50SD-S



Brads type J from 16 - 50 mm (5/8" - 2")

Flexible use either with compressor or compressed air cylinder


In a plastic case
with one compressed air cylinder KT-1000 and an adapter
for use with compressor

Weight: 2,1 kg (4.63 lb.)
Operating pressure: approx. 3,5 - 10 bar (50 - 145 psi.)
Measurement LxWxH: 319 x 71 x 272 mm (12.56 x 2.8 x 10.71 in.)

Increased shot capacity, ergonomic design, depth adjustment,
no-mar tip, Lock-out safety device, single- and bump fire,
adjustable working pressure, manometer for working pressure,
gauge for air level

Applications:
Decorative mouldings, glazing beads, flooring beads, hardwood trim,
joinery and furniture manufacturing, etc.

Also available for secret fixing of glazing beads and for staples type ES or brads type N.

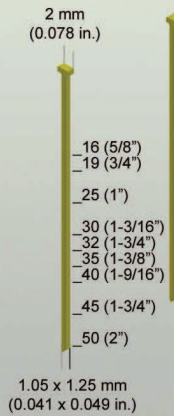

Cordless Air Nailer PKT-7-RK90-S



Round-head stripnails type RK from 50 - 90 mm (2" - 3-1/2")

Wire size: Ø 2,8 - 3,1 mm (0.113 - 0.122 in.)

Flexible use either with compressor or compressed air cylinder


Own refilling of compressed air cylinder KT-3500 with Fillstation
PKT-FILLMASTER 400 or easy replacement at a PREBENA dealer.

In a metal case with one compressed air cylinder KT-3500.

Weight: 4,2 kg (9.24 lb.)
Operating pressure: approx. 4 - 8 bar (58 - 116 psi.)
Measurement LxWxH: 541 x 180 x 364 mm (21.30 x 7.09 x 14.33 in.)

Integrated pressure reducer, gauge for fill level of air-cylinder,
adjustable depth control, single or bump fire

Anwendungsgebiete:
Substructure, rack making, shuttering, prefabricated houses,
wooden cases, lath, pallet, wood framework making, ec.

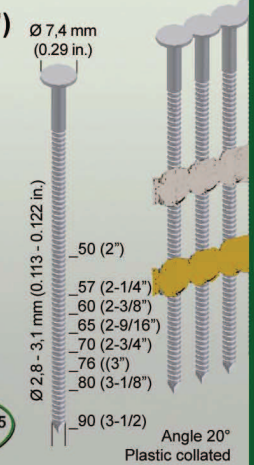

Pneumatic Pinner 1F-AL35

Pins type AL from 10 - 35 mm (3/8" - 1-3/8")



Weight: 0,9 kg (1,98 lb.)
Operating pressure: 4 - 6 bar (57 - 85 psi.)
Air requirement: 0,35 l (0.079 gal.) / pin
Measurement LxWxH: 199 x 46 x 172 mm
(7.83 x 1.81 x 6.77 in.)

Singlefire with safety device, no recoil,
adjustable exhaust

Applications:
For invisible fixing, fine beads, decorative mouldings,
glazing beads, cabinets, etc.

12 (1/2")
15 (19/32")
20 (13/16")
25 (1")
30 (1-3/16")
35 (1-3/8")

0,59 x 0,67 mm
(0.02 x 0.03 in.)

Finish Nailer 2P-J50SDS

Brads type J from 16 - 50 mm (5/8" - 2")

In a plastic case



Weight: 1,25 kg (2.756 lb.)
Operating pressure: approx. 4 - 7 bar (57 - 100 psi.)
Air requirement: approx. 0,7 l (0.154 gal.) / brad
Measurement LxWxH: 235 x 57,5 x 232 mm
(9.25 x 2.26 x 9.13 in.)

Safety device, side load magazine, exhaust silencer, no recoil,
adjustable exhaust

Applications:
Decorative mouldings, picture frame assembly, hardwood trim,
glazing beads, joinery manufacturing, furniture manufacturing, etc.

**As 2P-J50SVN and 2P-J50STVN also available
for secret fixing of glazing beads.**

16 (5/8")
19 (3/4")
25 (1")
30 (1-3/16")
32 (1-1/4")
35 (1-3/8")
40 (1-9/16")
45 (1-3/4")
50 (2")

1,05 x 1,25 mm
(0.039 x 0.049 in.)

Combi Nailer 2P-J/ES40COMBI

**Staples type ES from 15 - 40 mm (19/32" - 1-9/16")
and brads type J from 19 - 40 mm (3/4" - 1-9/16")**

In a plastic case



Weight: 1,5 kg (3.307 lb.)
Operating pressure: approx. 5 - 7 bar (71 - 100 psi.)
Air requirement: approx. 0,7 l (0.154 gal.) / staple/brad
Measurement LxWxH: 240 x 57,5 x 235 mm
(9.45 x 2.26 x 9.25 in.)

Safety device, combi magazine, exhaust silencer, no recoil,
adjustable exhaust

Applications:
Panelling, furniture manufacturing, sheet materials, cabinets, flooring,
decorative mouldings, joinery manufacturing, etc.

5,95 mm
(0.23 in.)
2 mm
(0.078 in.)
15 (19/32")
18 (3/4")
23 (7/8")
26 (1")
30 (1-3/16")
32 (1-1/4")
35 (1-3/8")
40 (1-9/16")
19 (3/4")
25 (1")
30 (1-3/16")
32 (1-1/4")
35 (1-3/8")
40 (1-9/16")
45 (1-3/4")
0,83 x 1,08 mm
(0.031 x 0.043 in.)
1,05 x 1,25 mm
(0.039 x 0.049 in.)

Corrugated Nailer 5C-WN15SNS

Corrugated fasteners type WN from 9 - 15 mm (3/8" - 19/32")

In a metal case



Weight: 2,4 kg (5.29 lb.)
Operating pressure: approx. 5 - 8 bar (71 - 114 psi.)
Air requirement: approx. 1,65 l (0.363 gal.) / nail
Measurement LxWxH: 300,5 x 82 x 282,5 mm
(11.81 x 3.23 x 11.10 in.)

Safety device, easy loading system for all length, single and bump fire,
exhaust silencer, no recoil

Applications:
Butt joints, millwork, chair rungs, window sash, picture frames, etc.

As 6F-WN25SNS also available for corrugated fasteners up to 25 mm (1")

2,2 mm
(0.087 in.)
24,8 mm
(0.98 in.)
9 (3/8")
12 (1/2")
15 (19/32")

Anchornailer ST2-ANK50



Anchornails type ANK from 40 - 50 mm (1-9/16" - 2")

Standard anchornails 25° angle - Wire size: Ø 4,2 mm (0.17 in.)

In a metal case


Weight: 1,9 kg (4.18 lb.)
Operating Pressure: 6 - 7 bar (87 - 101 psi.)
Air requirement: approx. 3,3 l (0.726 gal.) / nail
Measurement LxWxH: 330 x 124,5 x 251,5 mm
(12.99 x 4.90 x 9.90 in.)

Heavily impacted by more shock technique, Handle protection, exhaust silencer

quick and easy loading of the back load magazine, small nailmentation for exactly position of the nails, low weight and compact construction for inaccessible places like corners and angles

Applications:

Wood connectors like, angle connectors, cross connectors, hole plates, etc.

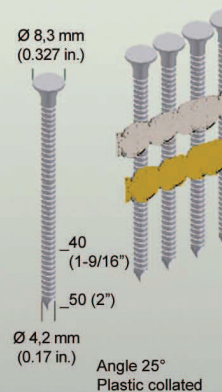

As ST2-ANK60 also available for anchornails up to 60 mm (2-3/8")

Pneumatic Construction Nailer 2X-CNH45



Round-head coilnails type CNH from 25 - 45 mm (1" - 1-3/4")

Wire size: Ø 2,5 mm (0.098 in.)


In a metal case

Weight: 1,55 kg (3.42 lb.)
Operating pressure: 5 - 8 bar (71 - 114 psi.)
Air requirement: 1,03 l (0.227 gal.) / nail
Measurement LxWxH: 255 x 130 x 260 mm
(10.04 x 5.12 x 10.24 in.)

Special tool for ideal straight, tool-free depth control, single fire, special nose with no-mar tip, 360° adjustable exhaust safety device, exhaust silencer, rubbered handle grip

Application:

Roof- and wall claddings of aluminium, stainless steel or titanium zinc, valley boards and metal sheet fixing on wood, etc.

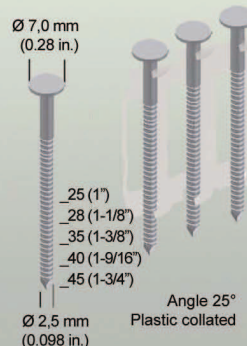

Roofing Nailer 4X-CNZ45



Roofing nails type CNZ from 19 - 45 mm (3/4\" - 1-3/4\")

Wire size: Ø 3,1 mm (0.122 in.)


In a metal case

Weight: 2,2 kg (4.849 lb.)
Operating pressure: approx. 5 - 8 bar (71 - 114 psi.)
Air requirement: approx. 1,7 l (0.374 gal.) / nail
Measurement LxBxH: 265 x 118 x 274 mm
(10.43 x 4.65 x 10.79 in.)

Fast-loading system, single and bump fire, rubberized safety bar, optimal depth adjustment, adjustable spacer, special tool for straight nailing, safety device, no recoil, exhaust silencer,

Applications:

Drives full round-head roofing nails in fastening asphalt and fiberglass shingles, etc.

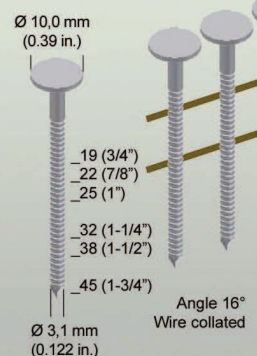

Coilnailer 5F-CNW65-S



Coilnails type CNW from 40 - 65 mm (1-9/16\" - 2-9/16\")

Wire size: Ø 2,5 - 3,1 mm (0.098 - 0.122 in.)


In a metal case

Weight: 2,6 kg (5.73 lb.)
Operating pressure: approx. 5 - 8 bar (71 - 114 psi.)
Air requirement: approx. 2,2 l (0.484 gal.) / nail
Measurement LxBxH: 326 x 135 x 346,5 mm
(12.83 x 5.31 x 13.64 in.)

Depth control, single and bump fire, no mar tip, safety device, exhaust silencer

Applications:

Exterior decks, crate and box assembly, pallet repair, sheathing, subfloors, decking, pallets, etc.

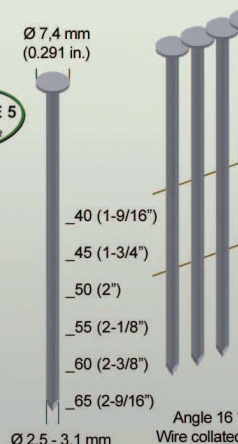

Coilnailer 7F-CNW90



Coilnails type CNW von 45 - 90 mm (1-3/4" - 3-1/2")

Wire size: Ø 2,5 - 3,1 mm (0.098 - 0.122 in.)

In a metal case

Weight: 3,6 kg (8.16 lb.)

Operating pressure: approx. 5 - 8 bar (71 - 114 psi.)

Air requirement: approx. 3 l (0.79 gal.) / nail


Measurement LxBxH: 386 x 142 x 369 mm
(15.20 x 5.60 x 14.53)

Safety device, exhaust silencer, depth adjustment,
single or bump fire, no mar tip

Applications:

Pallets, framing, pallet repair, decking, subfloors, exterior decks,
sheathing, etc.

More Coilnailer available in different versions.

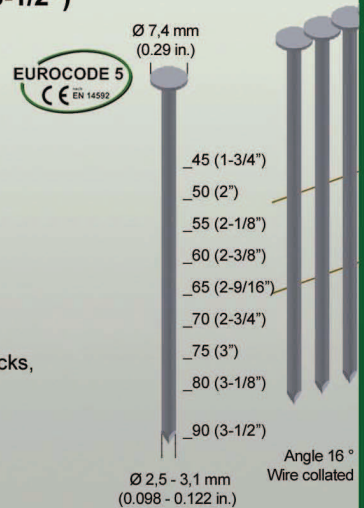

Round-head Stripnailer 8F-RK100



Round-head stripnails type RK from 50 - 100 mm (2" - 4")

Wire size: Ø 2,8 - 3,4 mm (0.110 - 0.131 in.)

In a metal case

Weight: 3,6 kg (7.937 lb.)

Operating pressure: approx. 5 - 7 bar (71 - 100 psi.)


Air requirement: approx. 2,2 l (0.484 gal.) / nail

Measurement LxBxH: 529 x 139 x 369 mm
(20.83 x 5.47 x 14.53 in.)

Safety device, single fire, exhaust silencer, depth adjustment,

Applications:

Wooden-cases, framing, pallets, pre-fabricated buildings, decking,
sheathing, etc.

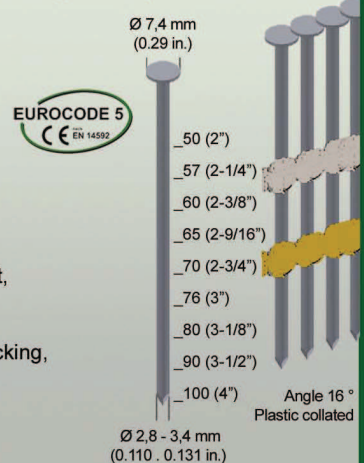

Round-head Stripnailerr 10X-RK130



Round-head stripnails type RK from 90 - 130 mm (3-1/2" - 5-1/8")

Wire size: Ø 3,4 - 4,2 mm (0.13 - 0.17 in.)

In a metal case

Weight: 6,1 kg (13.42 lb.)

Operating pressure: approx. 6 - 8 bar (85 - 114 psi.)

Air requirement: approx. 4,3 l (0.95 gal.) / nail


Measurement LxBxH: 553 x 175 x 478 mm
(21.77 x 6.89 x 18.82 in.)

Single fire, safety device, exhaust silencer, lock-out safety device,
strong magazine, additional handle

Applctaions:

Wooden cases, framing, pallets, pre-fabricated buildings,
decking, sheathing, etc.

**As 10X-RK160 also available for stripnails Type RK
up tp 160 mm (6-1/4")**

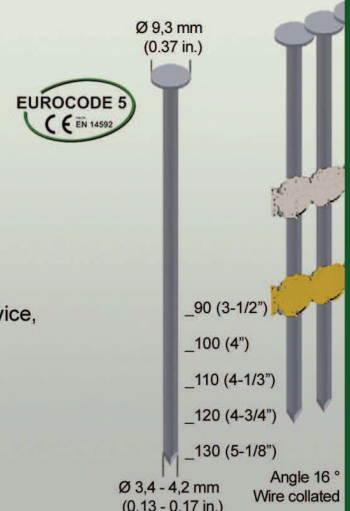

For technical changes and missprint no liability!

PREBENA

PREBENA Wilfried Bornemann GmbH & CO. KG

Seestraße 20-26 · 63679 Schotten

Telefon: 0 60 44 / 96 01 0

Telefax: 0 60 44 / 96 01 820

info@prebena.de

PREBENA Steen + Klientze GmbH

Kornkamp 16 · 22926 Ahrensburg

Telefon: 0 41 02 / 49 52 0

Telefax: 0 41 02 / 49 52 70

info@prebena-ahr.de

www.prebena.de