


PREBENA®

**COMPRESSED AIR...
ALWAYS A STEP AHEAD**

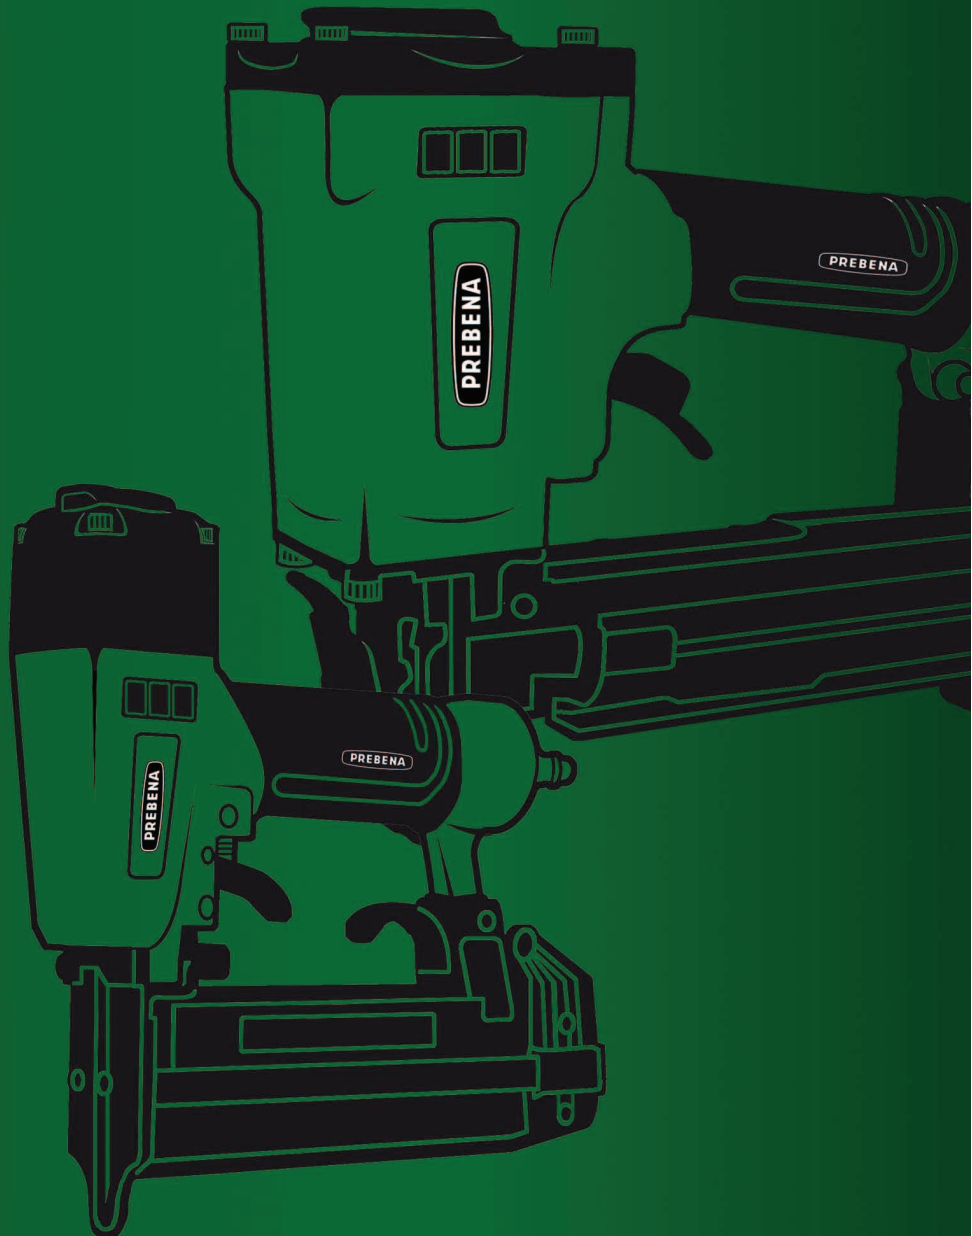

**Pneumatic nailer
and stapler for craftsmen**

Pneumatic Stapler 1GP-A16

**IDEAL FOR
CONTINUOUS OPERATION**



**OPTIWEAR-
TECHNOLOGY**

Staples type A from 4 - 16 mm (5/32" - 5/8")


Weight: 0,86 kg (1.89 lb.)
Operating pressure: 4 - 7 bar (58 - 100 psi.)
Air requirement: 0,27 l (0.059 gal.) / staple
Measurements: L 220 x W 155 x B 49 mm
(L 8.66 x W 6.1 x B 1.93 in.)

Highest performance, ideal energy utilization and long life,
optimized wearing parts, long service life, easy maintenance

Low weight and ideal handling for multi-purpose usage
user-friendly trigger system, practical magazine lock, high
quality bottom loading magazine for fast reloading, single fire,
free field of view, long nose, ergonomical anti-slip handle,
exhaust air on the rear side, inspection window for magazine level

Applications:

Upholstery, decoration, screening, light trim and moldings, picture frames,
insulation, roofing felt, building paper, carpet and underlay, etc.



Pneumatic Stapler 2P-ES40SDS



Staples type ES from 15 - 40 mm (19/32" - 1-9/16")


In a plastic case

Weight: 1,25 kg (2.76 lb.)
Operating pressure: approx. 4 - 7 bar (57 - 100 psi.)
Air requirement: approx. 0,75 l (0.154 gal.) / staple
Measurement LxWxH: 225 x 57,5 x 222 mm
(8.85 x 2.26 x 8.74 in.)

Safety device, bottom load magazine, exhaust silencer, no recoil,
adjustable exhaust

Applications:

Panelling, furniture manufacturing, sheet materials, cabinets, flooring,
decorative mouldings, etc.

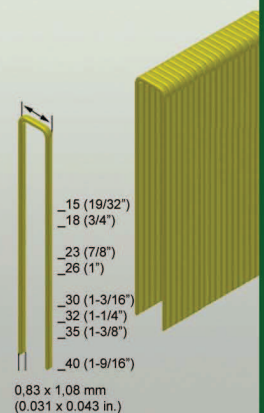

As 2P-H30SD also available for staples type H.

Pneumatic Stapler 4C-Z50



Staples type Z from 16 - 50 mm (5/8" - 2")


In a plastic case

Weight: 2,2 kg (4.85 lb.)
Operating pressure: approx. 5 - 8 bar (71 - 114 psi.)
Air requirement: approx. 1,72 l (0.378 gal.) / staple
Measurement LxWxBxH: 360 x 85 x 283 mm

Multifunction impact, single and bump fire, safety device,
increased driver, adjustable exhaust, ergonomic handle,
easy clear catch, adjustable exhaust

Anwendungsgebiete:

Fermacell, plasterboard, boxes, corrugated cardboards, cedar and
shake shingles, chipboards, packaging, substructures,
saving formwork, cardboard pallets, prefab construction, etc

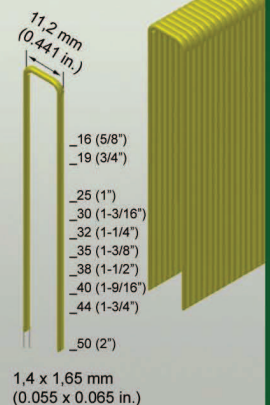

As 5C-Z75 also available for staples type Z up to 75 mm (3")

Pneumatic Stapler 9X-WP130



Staples type WP from 75 - 130 mm (3" - 5-1/8")

In a metal case


Weight: 5,7 kg (12,566 lb)
Operating pressure: 6 - 8 bar (85 - 114 psi)
Air requirement : approx. 2,5 l (0.55 gal.) / staple
Measurement LxWxH: 400 x 132 x 396 mm (15.75 x 5.2 x 15.6 in.)

Single shot trigger with safety device, depth adjustment, exhaust silencer,
strong magazine, no mar tip, lock-out safety device, high power,

The short magazine enables working in inaccessible places,
like corners or slanting roof

Applications:

Insulation panels, insulation panels from Cellulose, food wool slabs,
multi-layer plates, soft fiber insulating, rock wool insulation panels, etc.

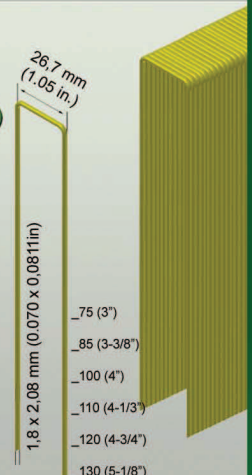

As 9X-WP160 also available for staples Type WP up to 160 mm (6-1/4")

Combi Nailer 2P-J/ES40COMBI



**Staples type ES from from 15 - 40 mm (19/32" - 1-9/16")
and brads type J from 19 - 40 mm (3/4" - 1-9/16")**

In a palstic case

Weight: 1,5 kg (3.307 lb.)

Operating pressure: approx. 5 - 7 bar (71 - 100 psi.)


Air requirement: approx. 0,7 l (0.154 gal.) / staple/brad

Measurement LxWxH: 240 x 57,5 x 235 mm
(9.45 x 2.26 x 9.25 in.)

Safety device, combi magazine, exhaust silencer, no recoil,
adjustable exhaust

Applications:

Panelling, furniture manufacturing, sheet materials, cabinets, flooring,
decorative mouldings, joinery manufacturing, etc.



Corrugated Nailer 5C-WN15SNS



Corrugated fasteners type WN from 9 - 15 mm (3/8" - 19/32")

In a metal case

Weight: 2,4 kg (5.29 lb.)

Operating pressure: approx. 5 - 8 bar (71 - 114 psi.)


Air requirement: approx. 1,65 l (0.363 gal.) / nail

Measurement LxWxH: 300,5 x 82 x 282,5 mm
(11.81 x 3.23 x 11.10 in.)

Safety device, easy loading system for all length, single and bump fire,
exhaust silencer, no recoil

Applications:

Butt joints, millwork, chair rungs, window sash, picture frames, etc.



As 6F-WN25SNS also available for corrugated fasteners up to 25 mm (1")