


PACKAGING
...MADE EASY

PREBENA®



COILNAILER

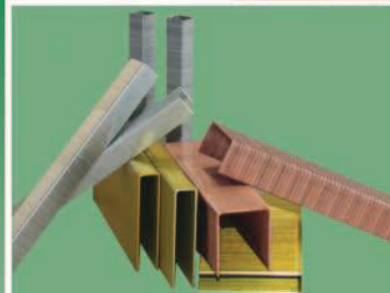

- **5F-CNF57**
- **5F-CNW65-S**
- **6F-CNW70**
- **7F-CNW90**
- **9F-CNW100EPAL**

Pneumatic, universally coilnailer for the packaging industry. They are suitable for wooden boxes and pallet construction.

The coilnailer 9F-CNW100-EPAL processed EPAL-nail up to 100 mm (4") for repair of europalettes.

The coilnailers are versatile applicable.



7F-CNW90 and 9F-CNW100EPAL in a metal case

TECHNICAL DETAILS	5F-CNF57	5F-CNW65-S	6F-CNW70	7F-CNW90	9F-CNW100EPAL
Weight	2,70 kg (5.95 lb.)	2,60 kg (5.73 lb.)	3,60 kg (7.94 lb.)	3,60 kg (7.94 lb.)	5,30 kg (11.684 lb.)
Operating pressure	5 - 8 bar (71-114 psi.)	5 - 8 bar (71-114 psi.)	5 - 8 bar (71-114 psi.)	5 - 8 bar (71-114 psi.)	5 - 8 bar (71-114 psi.)
Air requirement/nail	approx. 1,55 l (0.341 gal.)	approx. 2,20 l (0.484 gal.)	approx. 2,70 l (0.594 gal.)	approx. 3,00 l (0.79 gal.)	approx. 5,40 l (1.183 gal)
Staple type	type CNF	type CNW	type CNW	type CNW	type CNW
Length	25-57 mm (1"-2-1/4")	40-65 mm (1-9/16"-2-9/16")	45 - 70 mm (1-3/4"-2-3/4")	45-90 mm (1-3/4"-3-1/2")	75 - 100 mm (3"- 4")
Wire size	2,1-2,3 mm (0.082-0.091 in.)	2,5-3,1 mm (0.098-0.120 in.)	2,5-2,8 mm (0.098-0.110 in.)	2,5-3,1 mm (0.098-0.120 in.)	3,1-3,4 mm (0,122-0.131 in.)
depth adjustment	no	yes	no	yes	no
triggering system	bump fire	single and bump fire	bump fire	single and bump fire	single fire



COILNAILS TYPE CNF UND CNW (WIRE COLLATED, 16 DEGREE)

	Length	Material	Wire size	Box pcs.	
CNF21/32BKRI	32 mm (1-1/4")	bright, ring	2,1 (0.08 in.)	16.800	<p>Ø 5,8 - 8,6 mm (0.23-0.34 in.)</p> <p>32 (1-1/4") 38 (1-1/2") 45 (1-3/4") 50 (2") 55 (2-1/8") 60 (2-3/8") 65 (2-9/16") 70 (2-3/4") 75 (3") 80 (3-1/8") 90 (3-1/2") 100 (4")</p>
CNF21/38BKRI	38 mm (1-1/2")	bright, ring	2,1 (0.08 in.)	12.600	
CNF21/50BKRI	50 mm (2")	bright, ring	2,1 (0.08 in.)	12.000	
CNW25/45BKRI	45 mm (1-3/4")	bright, ring	2,5 (0.098 in.)	10.800	
CNW25/50BKRI	50 mm (2")	bright, ring	2,5 (0.098 in.)	9.000	
CNW25/60BKRI	60 mm (2-3/8")	bright, ring	2,5 (0.098 in.)	7.200	
CNW25/65BKRI	65 mm (2-9/16")	bright, ring	2,5 (0.098 in.)	7.200	
CNW28/65BKRI	65 mm (2-9/16")	bright, ring	2,8 (0.11 in.)	6.000	
CNW28/75BKRI	75 mm (3")	bright, ring	2,8 (0.11 in.)	4.500	
CNW31/80BKRI	80 mm (3-1/8")	bright, ring	3,1 (0.122 in.)	3.600	
CNW31/90BKRI	90 mm (3-1/2")	bright, ring	3,1 (0.122 in.)	3.600	
CNW28/40BKRI-EPAL	40 mm (1-9/16")	bright, ring	2,8 (0.11 in.)	9.000	
CNW33/90BKRI-EPAL	90 mm (3-1/2")	bright, ring	3,3 (0.130 in.)	3.060	Ø 2,1 - 3,4 mm (0.08 - 0.131 in.)

Also available in the versions bright / galvanized / galvanized, ring.



**PREBENA Wilfried Bornemann
GmbH & Co. KG**
Seestraße 20-26
63679 Schotten - Germany
Phone: +49 (0) 6044 9601-0
Fax: +49 (0) 6044 9601-820
info@prebena.com
www.prebena.com



Here you will find our
packaging program!

