

EV reel 

special
app 

lights 

energy 

air 

fluids 


garden 

General Selection Products

Mavel
AUTOMATIC REELS

SLOW MOTION

We slow down the movement,
not your work.



MADE IN ITALY

Designed and Manufactured

In normal reels, the cable returns to its seating quickly and uncontrollably, requiring the operator to accompany it, which means time wasted. To help resolve this issue, in 2010 Mavel - a manufacturer of high-quality reels, designed and patented the very first and one-of-a-kind external device that can be easily installed and removed.


A simple yet ingenious idea. **Slow Motion** is in fact an optional, high-performance device that **controls and slows down rewinding**, in a uniform manner, thereby eliminating jerking and whiplash. The result? Improved safety, a tidier working environment, and less time wasted.

Mavel Slow Motion: easy to install, practical to use, simple to replace.






go slow, be happy

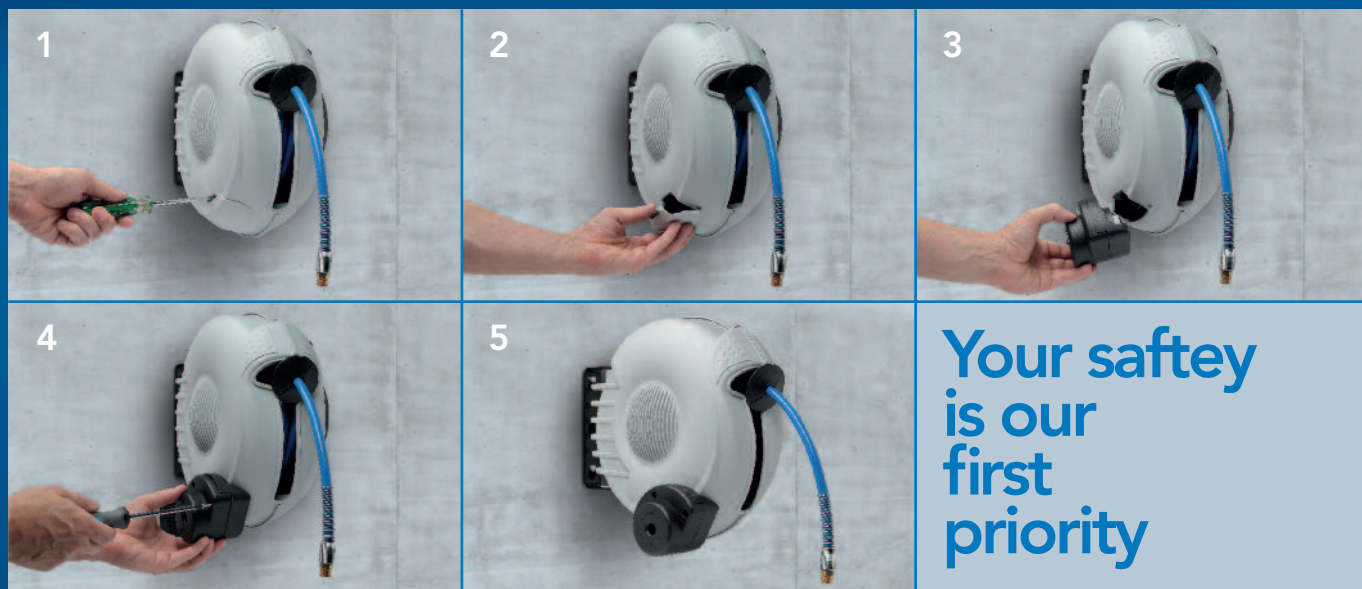Practical, easy and fast assembly!



Your safety
is our
first
priority

Code	 Energy	 Lights	 Air
Roll Classic PLUS	707010	707010	707010
Roll Master PLUS	707020	707020	707020
Roll Dynamic 230V - Air	707015	707015	707005
Roll Dynamic 400V	707005	-	-
Roll Compact 12/24/230V - Air	707040	707040	707030
Roll Compact 400V	707030	-	-
Roll Major PLUS	707000	707000	707000



Scan to view



EV reel



A step into the future, here and now. Electric cars are a rapidly-developing reality and an electric cable without a reel is like a smartphone with no connection!

Which is why Mavel came up with and designed a convenient automatic reel, the EV charging reel, the perfect accessory for your wall box.

Thanks to our EV charging reel, the electric cable used to charge your car will always be unwound to the perfect length, thereby avoiding the annoyance of it resting on the ground, exposed to dirt and pollutants, in addition to risking its rapid deterioration.

Perfect for private use, corporate car parks, hotel garages and any location where having a charging source on hand is a necessity.

The EV charging reel comes with a 5 m cable with type 2 connectors (on the wall box side), and your choice of type 1 or type 2 connectors on the car side. In addition, thanks to the exclusive Slow Motion safety system, which slowly retracts the cable, the Mavel cable reel for electric cars satisfies even the most demanding convenience and security.

Roll Compact EV Charging Reel

slow
motion
707230

	808220
	4 + 1 m
	3,6 kW
	16 A - 230 V
	4,6 kW
	20 A - 230 V
CABLE	3G2,5+1x0,5
	Type 2





MADE IN ITALY
Designed and Manufactured

special app 

Roll Classic Plus

LAN Cable



707210



811600



4 x (2 x 0,15) mm²



15 m

CABLE

CAT 5e

V max

48 V

A max

2 A

Roll Master Plus

Warning Tape Reel



707220



811700

811720



16 m

16 m

Roll Compact

Warning Tape Reel



707230



808400

808420



20 m

20 m

Roll Compact

Car Charging Cables



707240



809110



2x

Sezione

16 mm²



6 m

A max

30 A

Lighty LED



830118



10 m

2x1 mm²

CABLE

H05VV-F



18 LED - 900 LUMEN

Sirio_15



830300

Light source

15 SMD LED high brightness

Luminous flux

360 lm Standard mode

500 lm boost mode

Battery

3,7V 3000mAh LiPo

Battery charger

USB adapter

mini USB 230V

Charging time

5 h

Duration of light

5 h Standard mode

3 1/2 h Boost mode

Rollamp Classic Plus



707210



230V

811300



15 m

2x1 mm²

CABLE

H05RN-F



MAX

600 W



E27

230>24V

811340



15 m

2x1 mm²

CABLE

H05RN-F



MAX

600 W



E27

Rollamp Classic Plus



707210



12V>12V
24V>24V

811480



15 m

2x1 mm²

CABLE

H05RN-F



10 W

900 Lumen



18 LED

230>24V

811460



15 m

2x1 mm²

CABLE

H05RN-F



10 W

900 Lumen



18 LED

830122



/

CABLE

/



18 LED - 900 LUMEN

lights 

A BURST OF ENERGY FOR YOUR BUSINESS

Optimize productivity and safety with the retractable electric cable reels from **Mavel**:

- Organisation: a place for every cable and every cable in its place!
- Time-saving: no more knots, tangles, or cables spread over the floor.
- Integrity and duration: cables perfectly wound and protected, thus reducing damage and wear to a minimum.
- Protection and safety: the operator can move more freely and concentrate on the task at hand without having to risk tripping and slipping...




General characteristics:

- Shockproof plastic structure.
- Available with various types of cable: in PVC (H05VV-F) or high-quality rubber, either single-phase or three-phase. Lengths from 6 to 35 metres.
- Circuit protection against thermal or amperometric overloads.
- Device to block cable at the desired length (it can be disabled if continuous drive is needed).

Optional: SLOWMOTION system, can be applied to most of the **ENERGY** series.

Roll Minor






230V	800150
	5+1 m 3G1,5 mm ²
CABLE	H05VV-F
	800 W 2000 W
	SCHUKO

Roll Classic Plus


707210






230V	811200
	10 m 3G1,5 mm ²
CABLE	H05VV-F
	800 W 2000 W
	SCHUKO

Roll Master Plus


707220






230V	811030	811055
	15 m 3G1,5 mm ²	10 m 3G2,5 mm ²
CABLE	H05VV-F	H07RN-F
	800 W 2000 W	1600 W 3000 W
	SCHUKO	SCHUKO

Roll Dynamic


707215






230V	826040
	18 m 3G1,5 mm ²
CABLE	H05VV-F
	800 W 2000 W
	SCHUKO

Roll Compact


707240






230V	808742	808757
	18 m 3G1,5 mm ²	15 m 3G2,5 mm ²
CABLE	H05VV-F	H07RN-F
	800 W 2000 W	1600 W 3000 W
	SCHUKO	SCHUKO

Roll Major Plus





707200









230V	820705	820722
	25 m 3G1,5 mm ²	20 m 3G2,5 mm ²
CABLE	H05VV-F	H07RN-F
	800 W 2000 W	1600 W 3000 W
	SCHUKO	SCHUKO

Roll Mega



230V	880450
	35 m 3G1,5 mm ²
CABLE	H05VV-F
	800 W 2000 W
	SCHUKO

400V	820896
	15 m 5G2,5 mm ²
CABLE	H07RN-F
	2800 W 5000 W
	EUROPE

400V	880850
	25 m 5G2,5 mm ²
CABLE	H07RN-F
	2800 W 5000 W
	EUROPE

A BREATH OF FRESH AIR!

The **Mavel** retractable hose reels are an essential tool for your business, greatly appreciated by operators. The device offers many advantages: hoses always of the right length, handily unwound and rewound, with no knots, undamaged and protected. Order and cleanliness in the workplace, practicality, time-saving, and increased productivity round out the list of pros that make this accessory an absolute must.






General characteristics:

- Shockproof plastic structure with metal bracket.
- Available with different types of hoses: in PU or high-quality PU/PVC blend for pressures up to 20 bar. Lengths from 6 to 20 metres.
- Device to block cable at the desired length (it can be disabled if continuous drive is needed).

Optional: SLOWMOTION system, can be applied to most of the **AIR** series.






Roll Minor



	810010
	5+1 m
	6x8 mm 1/4"
 = bar	10 bar
	Max 10 bar
	NO






Roll Master Plus



	804200
	9 m
	8x12 mm 1/4"
 = bar	10 bar
	Max 10 bar
	Max 40° C






Roll Dynamic Air



	826300	826400
	12 m	8 m
	8x12 mm 1/4"	10x15 mm 3/8"
 = bar	15 bar	15 bar
	Max 15 bar	Max 15 bar
	Max 40° C	Max 40° C






Roll Compact



	808075	809010
	12 m	8 m
	8x12 mm 1/4"	10x15 mm 3/8"
 = bar	15 bar	15 bar
	Max 15 bar	Max 15 bar
	Max 40° C	Max 40° C






Roll Major Plus



	821100	821300
	15 m	14+1 m
	8x12 mm 1/4"	10x15 mm 3/8"
 = bar	15 bar	15 bar
	Max 15 bar	Max 15 bar
	Max 40° C	Max 40° C






Roll Mega



	880100	880200
	20 m	15+1 m
	10x15 mm 3/8"	12x17,5 mm 1/2"
 = bar	15 bar	15 bar
	Max 15 bar	Max 15 bar
	Max 40° C	Max 40° C

Roll Profi Open



	860650	860660
	16+2 m	13+2 m
	10x15 mm 3/8"	13x18 mm 1/2"
 = bar	20 bar	20 bar
	Max 20 bar	Max 20 bar
	Max 40° C	Max 40° C

"FLUIDS"... AND EVERYTHING FLOWS SMOOTHLY!


A family of retractable reels for fluids capable of facilitating and optimizing a day's work. The standard version comes with a swivel and fixed steel bracket (The standard Roll PROFI comes only with the swiveling bracket, but can be supplied with a fixed bracket upon request), suitable to be installed on the wall, ceiling or floor.





The reel structure is made in solid, shockproof plastic. Available without hoses or with different lengths and sections of hose (from 15m 1/4" to 20m 1/2").



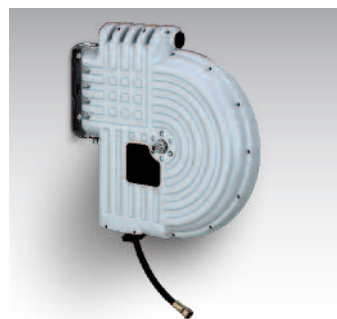

Suitable for conveying:

- Oil: max 60bar 40°C
- Water: max 200 bar 150°C

Roll Profi











860220	
	15 m - 3/8"
 IN	1/2"M
OUT 	3/8"F
 OIL	Max 60 bar / 40° C

860320	
	15 m - 3/8"
 IN	1/2"M
OUT 	3/8"F
 WATER	Max 200 bar / 150° C

Roll Profi Open











860520	
	15 m - 3/8"
 IN	1/2"M
OUT 	3/8"F
 OIL	Max 60 bar / 40° C

860620	
	15 m - 3/8"
 IN	1/2"M
OUT 	3/8"F
 WATER	Max 200 bar / 150° C

Roll Big Profi



860930	
	19+1 m - 3/8"
 IN	1/2"M
OUT 	3/8"F
 OIL	Max 60 bar / 40° C

860935	
	20 m - 3/8"
 IN	1/2"M
OUT 	3/8"F
 WATER	Max 200 bar / 150° C

FOR TRUE RELAXATION WHILE GARDENING...

The **GARDEN** series is a must. Constructed according to the strictest quality standards, made completely in shockproof plastic, practical and functional, this device ensures an orderly winding of the hose, making it easier and safer for enthusiasts and professionals alike.

Available hose lengths:





20m or 30 m, 1/2", or 20m, 5/8".

ROLL MAXI EVO with optional SLOW MOTION system:

gradual winding of the hose in complete safety without tearing or whiplash.





Roll Maxi Evo



844150	
	20 m
 11x15 mm	1/2"
 =bar	6 bar
 MAX	Max 40° C

Roll Maxi



840310		840410
	30 m	20 m
 11x15 mm	1/2"	15x19 mm
 =bar	6 bar	6 bar
 MAX	Max 40° C	Max 40° C

EV reel
energy
slow motion
lights
special app
fluids
garden
air

