

delvo

GENERAL CATALOG



Nitto Kohki's "**delvo**" contributes to improvement of assembly quality.



"delvo", a screwdriver that realizes high precision torque management

Products with high reliability are born only with reliable tools.

High Precision

A high precision torque is a must to improve assembly quality. "delvo" has high repeatable torque accuracy, and it is possible to equalize the tightening torque.

Long Life

"delvo" with brush motor uses a long life motor that withstands a guaranteed fastening cycle of a million times. "delvo" with brushless motor are eco-friendly and maintenance free that realize high durability.

Shockless

Original clutch and motor stop mechanism minimizes the shock at the end of the screw fastening. It reduces the fatigue of screw fastening.



NITTO KOHKI has made every effort in environmental improvement schemes on a company-wide basis through the implementation of ISO14001 to execute environmentally conscious business activities. As a part of our ongoing commitment to improve the environment, we are also committed to exclude or reduce restricted chemical substances in our products, as designated by the RoHS directives and Laws and Regulations of Chemical Substances in Japan. For further details, please see the following:

Nitto Kohki group companies' Green Procurement Guidelines have been established by their environmental committee which consists of members from all the Nitto Kohki group of companies. Nitto Kohki group companies give preferential treatment to suppliers that work to an environmental policy framework. Nitto Kohki group companies periodically survey their suppliers to ensure their chemical management systems include the monitoring of environmental issues such as the RoHS directives, and Japanese laws and regulations of Chemical Substances to minimize packaging and waste. We are continuing our goal to ensure that our made-to-order items are also covered by our environmental policy.

Green Procurement Policy

Each of the Nitto Kohki group companies is clarifying the control categories of the environmental management substances included in the parts and auxiliary materials constituting Nitto Kohki products and those of the environmental management substances used in the manufacturing processes. We will promote prohibition and reduction of use of the environmental management substances according to such control categories. Through these activities, we will comply with various laws and regulations related to the environmental management substances and reduce the impact to the global environmental conservation and to the ecological system.

Scope of Application

Our Green Procurement Guideline applies to all materials, parts, products, and auxiliary materials which Nitto Kohki Group companies purchase for production or sales.

Our Green Procurement Activities

NITTO KOHKI group companies continually aim to comply with RoHS directives, and Japanese laws and regulations of Chemical Substances.

- Standard products have been RoHS compliant. Green procurement activities on made-to-order products are continuing.
- NITTO KOHKI group companies are now working to the REACH Regulation.
- NITTO KOHKI group companies are building a database of the chemical management substances regulated by the RoHS directives, the REACH Regulation and Japanese laws and regulations of Chemical Substances.

Classification in this catalog

Power type		—— The type of power source is indicated.	
Brush motor	Brushless motor	—— The type of motor is indicated.	
Miniature screw	Precision screw	Machine screw	—— The type of screw* is indicated.
Screw Size			—— The size range of screw is indicated.

* Miniature screw ... for 1.0 to 2.6 mm

Precision screw ... for 1.0 to 3.5 mm

Machine screw ... for 2.6 to 8.0 mm



About Torque Management

The fastening torque generated on the screw varies depending on the screw size, material and the type of workpiece. Always check and manage the torque generated on the screw with a torque wrench., etc. The fastening torque varies depending on the fastening conditions.

delvo

CONTENTS

List of Screwdrivers	3
C Series (Current Control Type)	7
S Series (Variable Speed Type)	10
A Series (Low Voltage Type [DC])	13
A Series (Transformerless Type [AC])	14
DLV02/12/16 Series	15
DLV7400A Series	16
DLV5700 Series	17
DLV5800 Series	18
DLV7300 Series	19
DLV7300-BME/BKE Series	20
DLV7500/8500 Series	21
DLV7000/8000 Series	24
DLV7100/7200/8100/8200 Series	25
DLV7104/8104/8204 Series	26
Screw Fastening Counters	27
DLR5640-WN	29
Screwdrivers designed for DLR5640-WN	30
DLR5040A/5340-WE	31
Screwdrivers designed for DLR5040A/5340-WE	32
A Series (For Automation)	33
DLV3100/3300 Series (For Automation)	35
DLT1173A/1673A/1973A	36
NK BIT	37
Vacuum Pickups and Sleeves	39
Accessories	40
Safety guide	42

Quick Reference Symbols

	Lever Start Operates when the lever is pressed.		Push to Start Operates when the screwdriver is pressed.		Transformerless A dedicated controller is not required. Operates by commercial power supply.		Low Voltage Connect to dedicated controller. Operates at electric voltage under 42V.
	Brushless Motor Maintenance free, no brush replacement required. Realizes high durability.		Grounded Bit Prevents electrostatic breakdown when the bit contacts the workpiece.		ESD Protection Prevents electrostatic charging and saves the workpiece from electrostatic breakdown.		Low Shock Softens the shock at the end of tightening and lowers the load to the workpiece.
	Clean room adaption Adapts to assembly in class 5 clean rooms		Soft Stop Gradually reduces the rotation speed to improve the screw tightening quality.		Variable Speed Can be adjusted to a suitable tightening speed.		Soft Start Gradually increases the rotation speed to prevent damage to the screw head.

[Brushless Motor - DC Power Supply]

Page	Outer Appearance	Series	Model	Torque Range (Nm [lbf-in])	Screw Size (mm)		Mass (g [lbs])	Lever Start	Push to Start	ESD Protection	Soft Stop	Low Speed	Medium Speed	High Speed	Built-in Screw Counter	SPC Type available (for screw counter)	Controller		
					min.	max.											Model	Outer Appearance	
7		C Series (Current control type)	DLV04C10L	0.05 - 0.4 [0.4 - 3.5]	1.2	3.0	370 [0.82]	●		●		●	●	●		DCC0101X-AZ			
			DLV10C10L	0.2 - 1.0 [1.8 - 8.9]	1.8	4.0		●		●		●	●	●					
10		S Series (Variable speed type)	DLV30S06L	0.4 - 3.0 [3.5 - 26.6]	2.6	5.0	710 [1.57]	●		●	●	●			●		DEA0151N-AZ or DEA0241N-AZ		
			DLV30S06P						●	●	●	●			●				
			DLV30S12L					●		●	●		●			●			
			DLV30S12P						●	●	●	●			●				
			DLV30S20L	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	860 [1.90]	●		●	●			●	●		DEA0241N-AZ		
			DLV30S20P						●	●	●			●	●				
			DLV45S06L					●		●	●	●			●		DEA0151N-AZ or DEA0241N-AZ		
			DLV45S06P						●	●	●	●			●				
			DLV45S12L	3.8 - 7.0 [33.6 - 62.0]	5.0	8.0		●	●	●	●				●		DEA0241N-AZ		
			DLV45S12P						●	●	●	●			●				
13		A Series	DLV30A06L	0.4 - 3.0 [3.5 - 26.6]	2.6	5.0	690 [1.52]	●		●							DEA0151N-AZ or DEA0241N-AZ		
			DLV30A06P						●	●									
			DLV30A12L					●		●			●						
			DLV30A12P						●	●		●							
			DLV30A20L	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	840 [1.85]	●		●					●		DEA0241N-AZ		
			DLV30A20P						●	●				●					
			DLV45A06L					●		●		●					DEA0151N-AZ or DEA0241N-AZ		
			DLV45A06P						●	●		●							
			DLV45A12L	3.8 - 7.0 [33.6 - 62.0]	5.0	8.0		●	●	●		●				DEA0241N-AZ			
			DLV45A12P						●	●	●	●							
15		DLV02/12/16	DLV02SL-CKE	0.03 - 0.2 [0.3 - 1.8]	1.0	2.2	470 [1.04]	●					●			DLC16S			
			DLV02SL-BKE					●		●			●						
			DLV12SL-CKE	0.15 - 1.2 [1.3 - 10.6]	1.4	3.0		●					●						
			DLV12SL-BKE					●	●				●						
			DLV16SL-CKE	0.2 - 1.6 [1.8 - 14.2]	2.2	4.0		●					●						
			DLV16SL-BKE					●		●			●						

[Brushless Motor - AC Power Supply]

Screw Size (mm)	Torque Range (Nm [lbf-in])		Model	Series	Outer Appearance	Page	SPC Type available (for screw counter)	Built-in Screw Counter	High Speed	Medium Speed	Low Speed	Soft Stop	ESD Protection	Push to Start	Lever Start	Mass (g [lbs])
	min.	max.														
700 [1.54]	2.6	5.0	DLV30A06L	A Series		14	●	●	●	●	●	●	●	●	●	700 [1.54]
			DLV30A06P				●	●	●	●	●	●	●	700 [1.54]		
			DLV30A12L				●	●	●	●	●	●	700 [1.54]			
			DLV30A12P				●	●	●	●	●	700 [1.54]				
			DLV30A20L				●	●	●	●	700 [1.54]					
			DLV30A20P				●	●	●	700 [1.54]						
870 [1.92]	4.5	6.0	DLV45A06L				●	●	●	●	●	●	●	●	870 [1.92]	
			DLV45A06P				●	●	●	●	●	●	870 [1.92]			
			DLV45A12L				●	●	●	●	●	870 [1.92]				
			DLV45A12P				●	●	●	●	870 [1.92]					
			DLV70A06L	●	●	●	●	870 [1.92]								
			DLV70A06P	●	●	●	870 [1.92]									

[Brush Motor - DC Power Supply]

Page	Outer Appearance	Series	Model	Torque Range (Nm [lbf·in])	Screw Size (mm)		Mass (g [lbs])	Lever Start	Push to Start	ESD Protection	Clean Room Type	High Speed	Low Shock	SPC Type available (for screw counter)	Controller		
					min.	max.									Model	Adjustable speed	Outer Appearance
16		7400A	DLV7410A	0.02 - 0.2 [0.2 - 1.8]	1.0	2.3	230 [0.51]	●		●			●	●	DLC1110	●	
			DLV7410HA					●		●		●	●				
			DLV7420A	0.15 - 0.4 [1.3 - 3.5]	1.6	2.6	●		●			●	●				
			DLV7419A	0.02 - 0.2 [0.2 - 1.8]	1.0	2.3	●		●	●		●					
			DLV7419HA				●		●	●	●						
			DLV7429A	0.15 - 0.4 [1.3 - 3.5]	1.6	2.6	●		●	●		●					
17		5700	DLV5720	0.02 - 0.2 [0.2 - 1.8]	1.0	2.3	230 [0.51]	●		●			●		DLC0350	●	
			DLV5720H					●		●			●	●			
			DLV5740	0.15 - 0.4 [1.3 - 3.5]	1.6	2.6	●		●			●	●				
			DLV5740H				●		●			●	●				
DLV5750	0.1 - 0.55 [0.9 - 4.9]	1.0	3.0	●		●			●		DLC0950	●					
18		5800	DLV5820	0.02 - 0.2 [0.2 - 1.8]	1.0	2.3	230 [0.51]	●		●					DLC0250E	●	
			DLV5820H					●		●							
			DLV5840	0.15 - 0.4 [1.3 - 3.5]	1.6	2.6	●		●								
19		7300	DLV7313	0.03 - 0.15 [0.3 - 1.3]	Up to 2.0		350 [0.77]	●							DLC1213A	●	
			DLV7323	0.05 - 0.5 [0.4 - 4.4]	1.0	3.0		●									
			DLV7333	0.3 - 1.2 [2.7 - 10.6]	2.0	3.5		●									
			DLV7325	0.05 - 0.5 [0.4 - 4.4]	1.0	3.0	400 [0.88]	●			●						
			DLV7335	0.3 - 1.2 [2.7 - 10.6]	2.0	3.5		●			●						
20		7300-BME/ BKE	DLV7321	0.05 - 0.5 [0.4 - 4.4]	1.0	3.0	350 [0.77]	●		●	●			●	DLC1213A	●	
			DLV7331	0.3 - 1.2 [2.7 - 10.6]		3.5		●		●	●			●			
			DLV7319	0.2 - 0.4 [1.8 - 3.5]	2.0	3.0	400 [0.88]	●		●	●						
			DLV7329	0.25 - 0.55 [2.2 - 4.9]				●		●	●						
			DLV7339	0.45 - 0.95 [4.0 - 8.4]				●		●	●						
			DLV7349	0.55 - 1.2 [4.9 - 10.6]	3.0	3.5		●		●	●						
21		7500	DLV7530-MKE	0.5 - 1.7 [4.4 - 15.1]	2.6	4.0	650 [1.43]	●							DLC4511	●	
			DLV7530-BKE					●		●							
			DLV7540-MKE	1.2 - 2.7 [10.6 - 23.9]	3.5	5.0	●										
			DLV7540-BKE				●		●								
			DLV7550-MKE	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	●										
			DLV7550-BKE				●		●								
		8500	DLV8530-MKE	0.5 - 1.7 [4.4 - 15.1]	2.6	4.0	650 [1.43]		●								
			DLV8530-BKE						●	●							
			DLV8540-MKE	1.2 - 2.7 [10.6 - 23.9]	3.5	5.0			●	●							
			DLV8540-BKE						●	●							
			DLV8550-MKE	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0		●									
			DLV8550-BKE					●	●								

[Brush Motor - AC Power Supply]


Page	Outer Appearance	Series	Model	Torque Range (Nm [lbf·in])	Screw Size (mm)		Mass (g [lbs])	Lever Start	Push to Start	ESD Protection	High Speed	SPC Type available (for screw counter)
					min.	max.						
24		7000	DLV7020	0.05 - 0.55 [0.4 - 4.9]	1.0	3.0	400 [0.88]	●				●
			DLV7030	0.3 - 1.1 [2.7 - 9.7]	2.0	3.5		●				●
			DLV7031	0.3 - 1.0 [2.7 - 8.9]				●		●		●
		8000	DLV8020	0.1 - 0.55 [0.9 - 4.9]	1.0	3.0	410 [0.90]		●			●
			DLV8030	0.3 - 1.1 [2.7 - 9.7]	2.0	3.5			●			●
			DLV8031	0.3 - 1.0 [2.7 - 0.9]		3.0			●	●		●
25	   	7100/ 7200	DLV7120	0.35 - 0.70 [3.1 - 6.2]	2.6	3.0	700 [1.54]	●				●
			DLV7130	0.5 - 1.7 [4.4 - 15.1]		4.0		●				●
			DLV7140	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0		●				●
			DLV7221	0.35 - 0.7 [3.1 - 6.2]	2.6	3.0		●		●		
			DLV7231	0.5 - 1.7 [4.4 - 15.1]		4.0		●		●	●	
			DLV7241	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0		●				●
			DLV7251	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	890 [1.96]	●				●
		8100/ 8200	DLV8120	0.35 - 0.70 [3.1 - 6.2]	2.6	3.0	690 [1.52]		●			●
			DLV8130	0.5 - 1.7 [4.4 - 15.1]		4.0			●			●
			DLV8140	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0			●			●
			DLV8150	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	890 [1.96]		●			●
			DLV8221	0.35 - 0.7 [3.1 - 6.2]	2.6	3.0	690 [1.52]		●		●	
			DLV8231	0.5 - 1.7 [4.4 - 15.1]		4.0			●		●	●
			DLV8241	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0			●			●
			DLV8251	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	890 [1.96]		●			●
26	 	7104/ 8104/ 8204	DLV7124	0.25 - 0.75 [2.2 - 6.6]	2.6	3.0	720 [1.59]	●		●		
			DLV7134	0.5 - 1.7 [4.4 - 15.1]		4.0		●		●		
			DLV7144	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0		●		●		
			DLV8124	0.25 - 0.75 [2.2 - 6.6]	2.6	3.0	710 [1.57]		●	●		
			DLV8134	0.5 - 1.7 [4.4 - 15.1]		4.0			●	●		
			DLV8144	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0			●	●		
			DLV8154	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	910 [2.01]		●	●		
			DLV8224	0.35 - 0.7 [3.1 - 6.2]	2.6	3.0	710 [1.57]		●	●	●	
			DLV8234	0.5 - 1.7 [4.4 - 15.1]		4.0			●	●	●	
			DLV8244	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0			●	●		

[Brushless Motor]

Page	Outer Appearance	Series	Model	Torque Range (Nm [lbf-in])	Screw Size (mm)		Mass (g [lbs])	Low Speed	Medium Speed	High Speed	Standard	Flange	M41 Screw	Coupling				
					min.	max.								Type of couplings				
33		A Series (for automation)	DLV30A06A-N	0.4 - 3.0 [3.5 - 26.6]	2.6	5.0	700 [1.54]	●			●			 Standard coupling				
			DLV30A06A-F				760 [1.68]	●			●							
			DLV30A06A-M				740 [1.63]	●				●						
			DLV30A12A-N				700 [1.54]		●		●							
			DLV30A12A-F				760 [1.68]		●			●						
			DLV30A12A-M				740 [1.63]		●			●						
			DLV30A20A-N				700 [1.54]			●	●							
			DLV30A20A-F				760 [1.68]			●		●						
			DLV30A20A-M				740 [1.63]			●			●					
			DLV45A06A-N	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0	780 [1.72]	●			●			 Flange coupling				
			DLV45A06A-F				840 [1.85]	●				●						
			DLV45A06A-M				820 [1.81]	●					●					
			DLV45A12A-N				780 [1.72]		●		●							
			DLV45A12A-F				840 [1.85]		●			●						
			DLV45A12A-M				820 [1.81]		●				●					
			DLV70A06A-N	3.8 - 7.0 [33.6 - 62.0]	5.0	8.0	780 [1.72]	●			●			 M41 screw coupling				
			DLV70A06A-F				840 [1.85]	●				●						
			DLV70A06A-M				820 [1.81]	●					●					

[Brush Motor]

Page	Outer Appearance	Series	Model	Torque Range (Nm [lbf-in])	Screw Size (mm)		Mass (g [lbs])	Controller Model
					min.	max.		
35		3100 (for automation)	DLV3121	0.25 - 0.7 [2.2 - 6.2]	2.3	2.6	900 [1.98]	Transformerless (controller not required)
			DLV3131	0.5 - 1.5 [4.4 - 13.3]	2.6	3.5		
			DLV3141	1.2 - 3.0 [10.6 - 26.6]	3.5	5.0		
			DLV3151	2.0 - 4.5 [17.7 - 39.8]	4.5	6.0		
		3300 (for automation)	DLV3321	0.05 - 0.5 [0.4 - 4.4]	1.0	3.0	400 [0.88]	DLC3310
			DLV3331	0.3 - 1.2 [2.7 - 10.6]	2.0	3.5		



delvo Brushless Type

C Series (Current control Type) Model **DLV04C/10C**

NEW



Features

- Easy fastening setting by controller
- Current Controlled Torque System suitable for screw fastening work
- Low-voltage brushless motor
- ESD (electrostatic discharge) protection structure
- For both hand-held / automatic machines
- Controller has built in counting function. Prevents human errors

Four screwdrivers can be consolidated into one

- **Controller can be set to any torque and speed within range.**

* The range varies depending on SOFT fastening or HARD fastening.

0.25 Nm 450 min ⁻¹		1st unit
0.15 Nm 600 min ⁻¹		2nd unit
0.35 Nm 1000 min ⁻¹		3rd unit
0.30 Nm 450 min ⁻¹		4th unit



Torque: 0.05 - 0.4 Nm (DLV04C)
[0.44 - 3.54 lbf·in]
0.2 - 1.0 Nm (DLV10C)
[1.77 - 8.85 lbf·in]
Speed: 100 - 1000 min⁻¹

Torque range **0.05 - 1.0 Nm**

When the same bit is used.

All in one!

- **Easily adapts for use in automatic machines**

The sequencing of the screwdrivers can be controlled by a PLC.



For installation on automatic assembly machines, attach optional flange coupling (DLW9015) or vacuum pickup (DLP6650).



- **Built-in Screw Fastening Counter Function**

Controller has built in counting function. Prevents human errors.



Specifications

Electric Screwdriver	Model	Bit	CE/UL	DLV04C10L-AY : K	DLV10C10L-AY : K
	Power Source				
	DCC0101X-AZP or DCC0101X-AZN				
	Torque Adjustment				
	Adjustment from 1 to 100% in 1% increments				
	Torque	SOFT fastening setting (1000 min ⁻¹ setting)		0.05 - 0.4 [0.4 - 3.5]	0.2 - 1.0 [1.8 - 8.9]
		SOFT fastening setting (600 min ⁻¹ setting)		0.05 - 0.35 [0.4 - 3.1]	0.2 - 0.45 [1.8 - 4.0]
		HARD fastening setting		0.05 - 0.4 [0.4 - 3.5]	0.2 - 1.0 [1.8 - 8.9]
	Free Speed (min ⁻¹)	SOFT fastening setting		600 - 1000	
		HARD fastening setting		100 - 1000	
Screw Size (mm)	Machine screw			1.2 - 3.0	1.8 - 4.0
	Tapping screw			1.1 - 2.5	1.6 - 3.5
Bit Type		NK35 (OD6.35 mm [1/4"] Hex. Shank)			
Input Voltage		24 V DC			
Mass		370 g [0.82 lbs]			
Rated Operation		ON: 0.5 seconds / OFF: 3.5 seconds			
Standard Accessories		• Bit NK35(No.0 x 4 x 75): 1 pc. • Bit NK35(No.1 x 4 x 75): 1 pc. • Bit NK35(No.2 x 4 x 75): 1 pc. • Connection Cord(DLW9075): 1 pc. • Suspension Bail: 1 pc.			

Model	DCC0101X-AZ : P*
Input Voltage	100 - 240 V AC, 50/60Hz
Operation Channel	Torque and speed setting in 4-channel memory
Function	Can switch to any operation channel
Count Function	Tracks screws fastened Workpiece detector can be incorporated
External Start up	Start up control can be enabled by external input signal
Control Function	
Input Signal Method	Photocoupler input (24 V DC drive (5 mA/1 input), respond to PNP output)
Output Signal	Photocoupler output (30 V DC or less, 30 mA/1 output or less, PNP output method)
Service Power Source	24 V DC (Maximum capacity 200 mA)
Power consumption	When on standby: 20 W During electric screwdriver rotation (rated): 30 W
Mass	1100 g [2.4 lbs]
Power cord (Optional)*	DLW9220 / DLW9240 / DLW9250

*DCC0101X-AZN with NPN output also available

*The power cord is sold separately. Ask us for the required power cord when ordering. (see page 9 "Optional Accessories")

Please contact us for 4 mm bit type ("M" Bit) of CE/UL models.

Comparison of Adjustment Method with Conventional Model

	Conventional	C Series
Torque adjustment	 Torque is adjusted by turning the adjustment ring at the end of the screwdriver.	 Can be set with the external controller. No need to adjust the screwdriver body.
Speed setting	 The speed of transformerless type screwdrivers is fixed for each series.	 Can be set with the external controller. Adjustable between 100 to 1000 min⁻¹.

SOFT / HARD Fastening Settings


Two types of fastening mode available subject to the workpiece.

Coordinate the actual workpieces, screws and operating conditions and determine the fastening mode.

SOFT fastening setting Suitable for workpieces with high fastening load such as tapping screws or fastening soft objects such as rubber.

HARD fastening setting Suitable for workpieces with small fastening load such as threaded holes or rigid bodies such as metal.

Output Torque and Rotation Speed

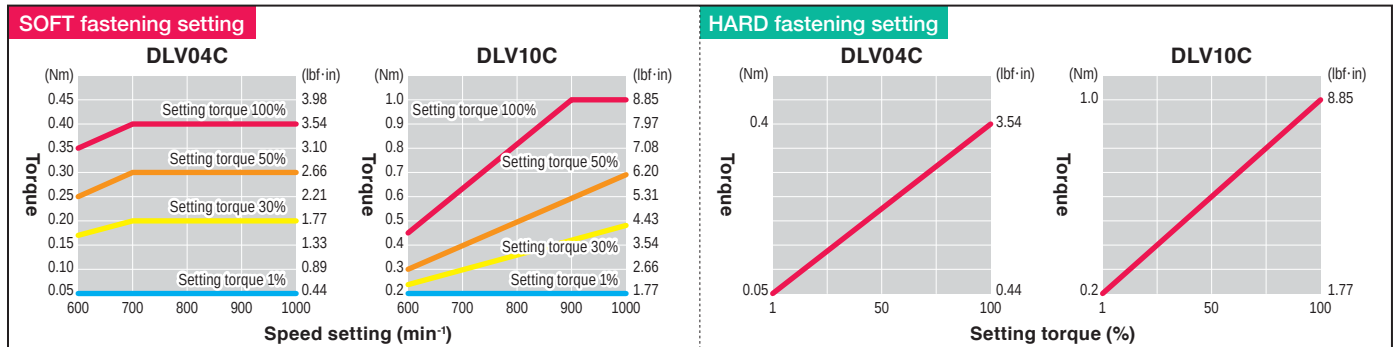

*The graph is for guidance only. The output torque range is not guaranteed.

External Signals

You can input or output external signals via a signal terminal block.

Terminal No.	Function	Details	I/O
1 (+)	+24 V DC	Built-in service power source (Capacity: Maximum 200 mA) • Use in power source for input/output signal common wire, or for the workpiece detection sensor, etc.	Service power source
2 (-)	0 V DC		
3	Channel A	In the 2-bit input signal, specify the operation channel (CH1 to CH4) • Valid only when "operation channel switching method" (No.1 CH-CHG) is set to "INPUT"	Input
4	Channel B		
5	Forward rotation startup	Startup with external input signal	
6	Reverse rotation startup		
7	WORK	Input the workpiece signal (workpiece detection sensor output) • With "count function" (No.11 COUNT-FNC) and "workpiece signal" (No.12 WORK-SNSR) set to ON, the workpiece signal input is valid	
8	WORK RESET	Reset operation (same as controller [WORK RESET] button)	
9	Keylock	Lock the controller button operation • Disable the controller button operation, and prevent setting changes by the operator	
10	Input signal negative common wire	Connect 0 V DC* • Service power source (terminal No.2) or external 0 V DC power source can be connected	
11	Forward rotation signal	Set output signal during forward rotation to ON	Output
12	Reverse rotation signal	Set output signal during reverse rotation to ON	
13	Count-up (C-UP)	Performance of normal screw tightening (torque-up) sets output signal to 0.3 seconds ON	
14	Screw fastening NG (F-NG)	If screw fastening NG, sets output signal to 0.3 seconds ON	
15	Operation channel 1 (CH1)	Set the channel output signal to ON during operation or settings	
16	Operation channel 2 (CH2)		
17	Operation channel 3 (CH3)		
18	Operation channel 4 (CH4)		
19	Operation OK	If the set count screw tightening is judged to be completed and operation OK, the output signal is set to ON	
20	Operation NG	When the WORK input signal is OFF during an operation, and the operation is judged to be NG, the output signal is ON	
21	Space	Connection impossible	
22	Output signal positive common wire	Connect +24 V DC* • Service power source (terminal No.1) or external +24 V DC can be connected	

*When PNP output

Optional Accessories

Grounded 3-Prong Power Cord

DLW9220



North America

DLW9240



Europe

DLW9250



UK

Screw vacuum pump

DLP2530 (100 V), DLP2570 (230 V)

Connect the tube to the vacuum pickup port. The vacuum will pick up the screw.



Torque checker
DLT1173A



Screw joint (with white rubber)
DLW4540



*For DLV04C10L-A Y SOFT fastening torque measurement

Screw joint (with black rubber)
DLW4550



*For DLV10C10L-A Y SOFT fastening torque measurement

Screw joint (with metal washer)
DLW4560



*For HARD fastening torque measurement of both DLV04/10C10L-A Y

For "K" Bit

Vacuum pickup
DLP6640



Vacuum pickup (for automatic machine)
DLP6650



Connection Cord
DLW9075



Standard accessory of screwdrivers


Flanged coupling (for automatic machine)
DLW9015




* Please see page 39 for details.

External Dimensions


•DLV04C/10C ("K" Bit Type)

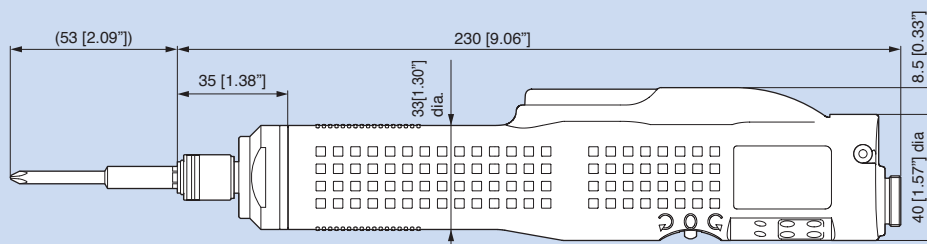

•DCC0101X-AZ

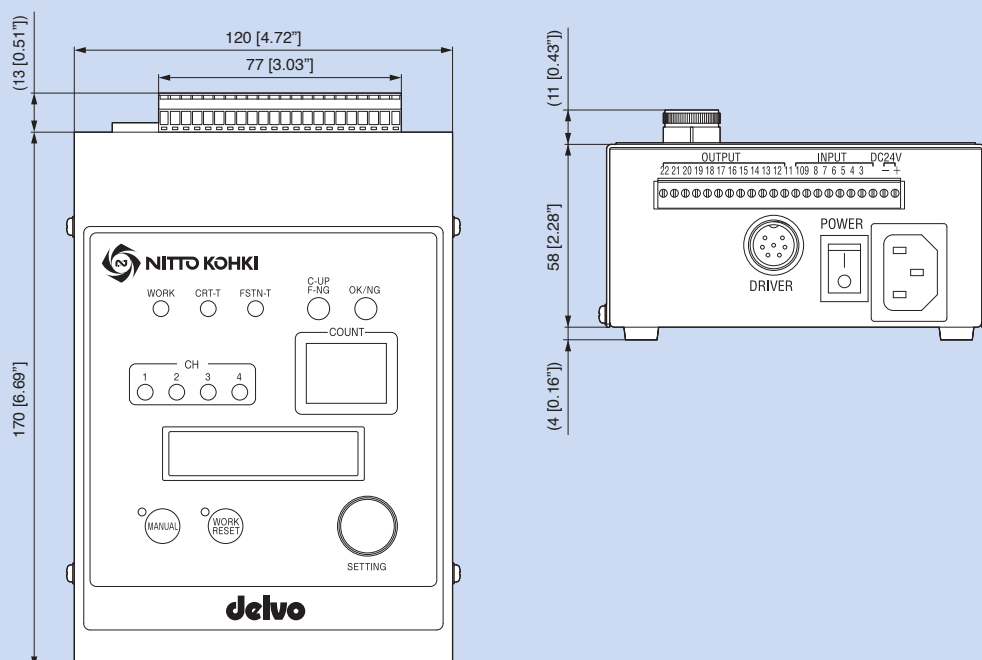

unit: mm [inch]



delvo Brushless Type

S Series (Variable speed Type) Model DLV30S/45S/70S

NEW



Features

- Built-in brushless motor
- Automatic speed control function
- Built-in screw counting function
- Setting with the Remote Controller
- ESD (electrostatic discharge) protection structure

This screwdriver can deal with various fastening conditions.

Torque range **0.4 - 7.0 Nm**
[3.5 - 62.0 lbf-in]

Built-in Automatic Speed Control Function

Low speed starting reduces the problems at start.

<Step 1>

High speed feeding at middle improves efficiency and quality of screw fastening work.

<Step 2>

Low speed fastening at finish reduces the problems at finish.

<Step 3>


Built-in the Functions of Screw Fastening Counter

- screw count setting
- fastening time setting, and fastening time measurement




Main LED mounted on the screwdriver

LEDs and Setting Buttons on the Screwdriver




Part Names of the Remote Controller



Specifications

Specifications		Low Speed	Standard	High Speed	Low Speed	Standard	Low Speed
Model	Bit	DLV30S06L-AY: K	DLV30S12L-AY: K	DLV30S20L-AY: K	DLV45S06L-AY: K	DLV45S12L-AY: K	DLV70S06L-AY: K
	Lever Start Push to Start	DLV30S06P-AY: K	DLV30S12P-AY: K	DLV30S20P-AY: K	DLV45S06P-AY: K	DLV45S12P-AY: K	DLV70S06P-AY: K
Power Source		DEA0151N-AZ or DEA0241N-AZ		DEA0241N-AZ	DEA0151N-AZ or DEA0241N-AZ	DEA0241N-AZ	
Torque Adjustment		Stepless					
Torque (Nm [lbf-in])	Low Torque Spring*1	0.4 - 1.6 [3.5 - 14.2]			2.0 - 4.5 [17.7 - 39.8]		3.8 - 7.0 [33.6 - 62.0]
	High Torque Spring*2	1.2 - 3.0 [10.6 - 26.6]					
Free Speed (min ⁻¹)		For the details, see separate setting range of speed and torque.					
Speed Level		Lv1 - Lv9 (Lv1: Min. Speed Lv9: Max. Speed decreases in a step-by-step manner)					
Power Consumption (W)		44					
Screw Size (mm)	Machine Screw	2.6 - 5.0			4.5 - 6.0		5.0 - 8.0
	Tapping Screw	2.5 - 4.0			4.0 - 5.0		4.5 - 6.0
Mass (g [lbs])		710 [1.57]			860 [1.90] (with pistol grip)		
Standard Accessories ³		• Bit NK35(No.2 × 7 × 75): 1 pc. • Low Torque Spring: 1 pc. • Suspension Bail: 1 pc. • Connection Cord (DLW9073): 1 pc.			• Bit NK35(No.2 × 7 × 75): 1 pc. • Connection Cord (DLW9073): 1 pc. • Suspension Bail: 1 pc. • Pistol Grip (DLW2300ESD): 1 pc.		



Please contact us for 5 mm bit type

*1: Standard Accessory

*2: Installed

*3: The power cord is sold separately. Ask us for the required power cord when ordering.



Setting Range of Speed and Torque (for reference only)

		DLV30S06	DLV45S06	DLV70S06			DLV30S12	DLV45S12			DLV30S20
Speed Level	Speed (min ⁻¹)	Torque (Nm [lbf-in])			Speed Level	Speed (min ⁻¹)	Torque (Nm [lbf-in])		Speed Level	Speed (min ⁻¹)	Torque (Nm [lbf-in])
Lv1	160	0.4 - 1.3 [3.5 - 11.5]	-	-	Lv1	300	0.4 - 0.6 [3.5 - 5.3]	-	Lv1	500	0.4 [3.5]
Lv2	220	0.4 - 2.0 [3.5 - 17.7]	2.0 - 2.4 [17.7 - 21.2]	-	Lv2	420	0.4 - 1.2 [3.5 - 10.6]	-	Lv2	690	0.4 - 0.8 [3.5 - 7.0]
Lv3	280	0.4 - 2.7 [3.5 - 23.9]	2.0 - 3.5 [17.7 - 30.9]	3.8 [33.6]	Lv3	530	0.4 - 1.8 [3.5 - 15.9]	2.0 [17.7]	Lv3	880	0.4 - 1.2 [3.5 - 10.6]
Lv4	340	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	3.8 - 4.6 [33.6 - 40.7]	Lv4	640	0.4 - 2.4 [3.5 - 21.2]	2.0 - 2.6 [17.7 - 23.0]	Lv4	1,060	0.4 - 1.6 [3.5 - 14.1]
Lv5	410	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	3.8 - 5.4 [33.6 - 47.8]	Lv5	750	0.4 - 3.0 [3.5 - 26.6]	2.0 - 3.2 [17.7 - 28.3]	Lv5	1,250	0.4 - 2.0 [3.5 - 17.7]
Lv6	470	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	3.8 - 6.2 [33.6 - 54.9]	Lv6	860	0.4 - 3.0 [3.5 - 26.6]	2.0 - 3.8 [17.7 - 33.6]	Lv6	1,440	0.4 - 2.4 [3.5 - 21.2]
Lv7	530	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	3.8 - 7.0 [33.6 - 62.0]	Lv7	980	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.4 [17.7 - 38.9]	Lv7	1,630	0.4 - 2.8 [3.5 - 24.7]
Lv8	590	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	3.8 - 7.0 [33.6 - 62.0]	Lv8	1,090	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	Lv8	1,810	0.4 - 3.0 [3.5 - 26.6]
Lv9	650	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	3.8 - 7.0 [33.6 - 62.0]	Lv9	1,200	0.4 - 3.0 [3.5 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	Lv9	2,000	0.4 - 3.0 [3.5 - 26.6]

*Speed and torque are for reference only. The actual values depend on the materials to be fastened and size of screws. The values are not guaranteed.

Setting Range for Standard Models

The low speed level is effective in hard-to-fasten applications such as tapped holes in sheet metal, stainless steel, and plastic. The high speed level is effective in shortening the cycle time in an assembly line.

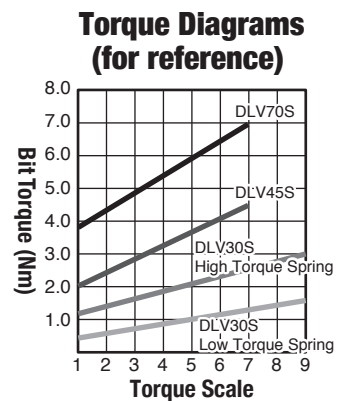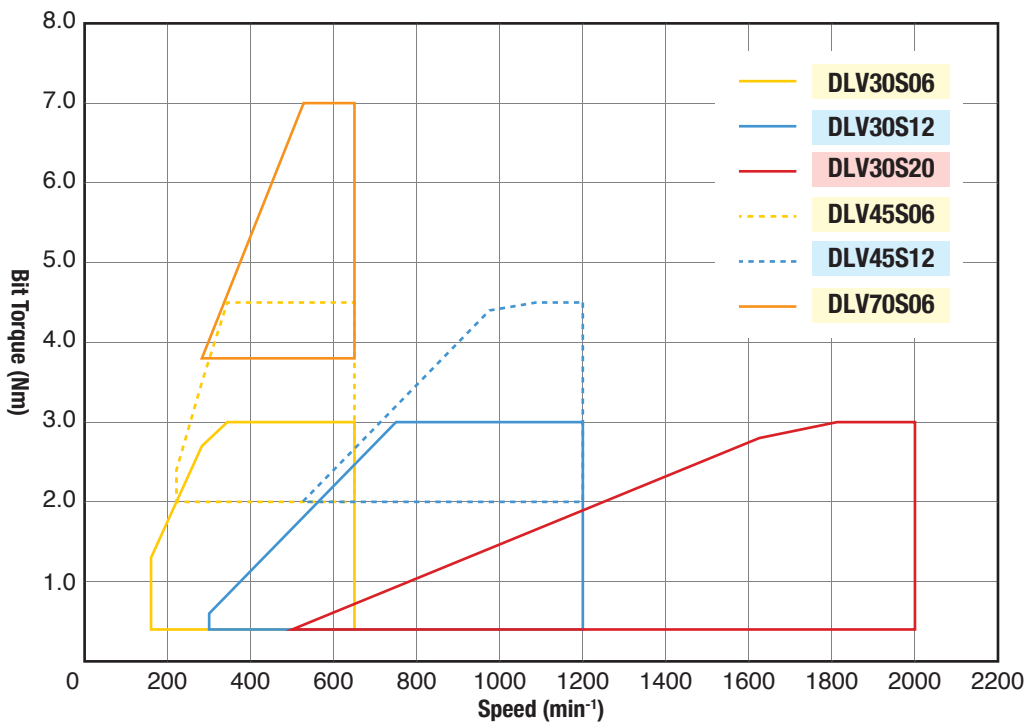

*Graphs are for reference only. The actual values depend on usage conditions.


Equipped with the External Signal Connector

The screwdriver can accept an external signal or output a signal externally through the external signal connector.

Pin No.	Lead wire color	Signal	Input / output
1	Red	+24 V DC power (supplied from outside)	
2	White	Workpiece Signal	Input
3	Green	Reset signal	Input
4	Yellow	LINK-IN	Input
5	Brown	Forced stop signal	Input
6	Blue	OK Signal	Output
7	Gray	NG Signal	Output
8	Orange	LINK-OUT	Output
9	Peach	Channel switching signal	Output
10	Purple	Torque-up (count) signal	Output
11	Yellow Green	Channel A	Input
12	Black	Channel B	Input
		Channel C	Input
		0 V DC	Input

Lead wire colors are the ones used in the optional signal cable ass'y DLW9090.


*Either Pin No.4 or 7 must be selected, but not both.


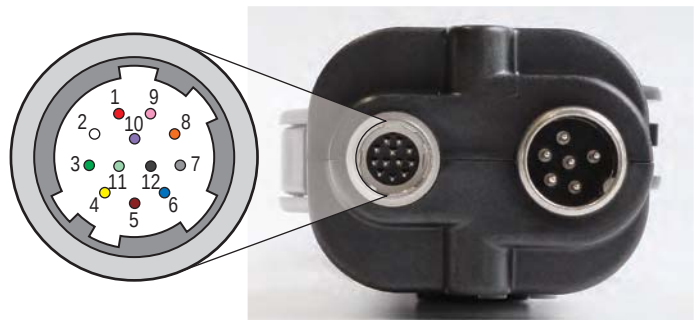


Optional Accessories

Power Supply DEA0151N-AZ DEA0241N-AZ 		Grounded 3-Prong Power Cord DLW9220 DLW9240 DLW9250  North America Europe UK			Remote Controller RC1000 
• Power cord is not included					
Signal Cable Ass'y DLW9090 	Connection Cord DLW9073 	Relay Cord (To connect DLW9073 and DLW9073) DLW9074 			
Standard accessory of screwdrivers					

External Dimensions

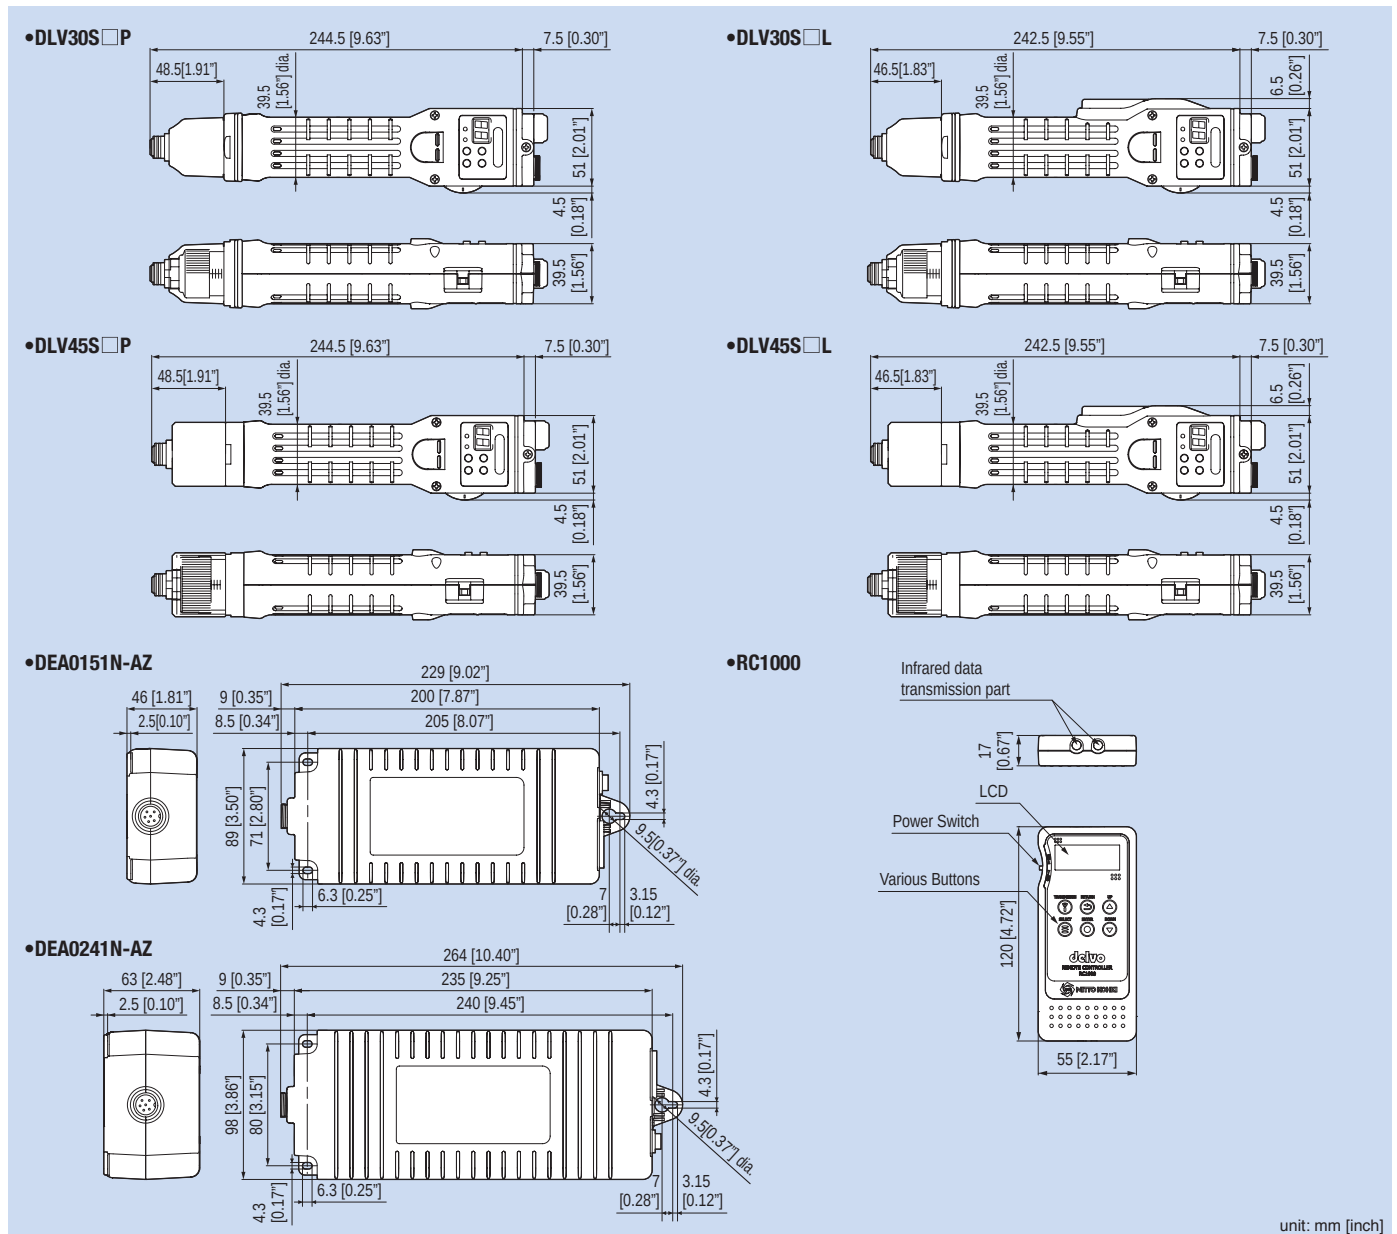



delvo Brushless Type

A Series (Low Voltage Type) Model DLV30A/45A/70A CE




Features

Eco-friendly electric screwdrivers with built-in brushless motors in a low voltage (DC) profile

- Torque range from 0.4 to 7.0 Nm
- Speed range from 650 to 2000 min⁻¹
- Both the Lever Start and Push to Start type models are available
- Equipped with a torque adjustment ring cover
- Design conforms to the RoHS Directive and thus appeals to the environmentally conscious user
- Easily detachable Pistol Grip DLW2300ESD (TD01965) comes with the unit as a standard accessory (DLV45A/70A)
- ESD (electrostatic discharge) protection structure

Specifications

Specifications			Low Speed		Standard		High Speed		Low Speed		Standard		Low Speed	
Electric Screwdriver	Model	Bit	Lever Start	DLV30A06L-AY : K	DLV30A12L-AY : K	DLV30A20L-AY : K	DLV45A06L-AY : K	DLV45A12L-AY : K	DLV70A06L-AY : K					
			Push to Start	DLV30A06P-AY : K	DLV30A12P-AY : K	DLV30A20P-AY : K	DLV45A06P-AY : K	DLV45A12P-AY : K	DLV70A06P-AY : K					
	Power Source			DEA0151N-AZ or DEA0241N-AZ			DEA0241N-AZ	DEA0151N-AZ or DEA0241N-AZ		DEA0241N-AZ				
	Torque Adjustment			Stepless										
	Torque	Low Torque Spring*1	0.4 - 1.6 [3.5 - 14.2]							2.0 - 4.5 [17.7 - 39.8]			3.8 - 7.0 [33.6 - 62.0]	
	(Nm [lbf-in])	High Torque Spring*2	1.2 - 3.0 [10.6 - 26.6]											
	Free Speed (min ⁻¹)			650	1200	2000	650	1200	650					
	Power Consumption (W)			44										
	Screw Size	Machine Screw	2.6 - 5.0							4.5 - 6.0			5.0 - 8.0	
	(mm)	Tapping Screw	2.5 - 4.0							4.0 - 5.0			4.5 - 6.0	
Mass (g [lbs])			690 [1.52]							840 [1.85] (with Pistol Grip)				
Standard Accessories			• Bit NK35(No.2 × 7 × 75): 1 pc. • Low Torque Spring: 1 pc. • Connection Cord (DLW9073): 1 pc. • Suspension Bail: 1 pc.							• Bit NK35(No.2 × 7 × 75): 1 pc. • Connection Cord (DLW9073): 1 pc. • Suspension Bail: 1 pc. • Pistol Grip (DLW2300ESD): 1 pc.				
Power Supply	Model	DEA0151N-AZ		DEA0241N-AZ		 unit: mm	*1: Standard Accessory *2: Installed Torque Diagrams (for reference) 8.0							
	Input	100 - 240 V AC, 50/60 Hz												
	Output	40 V DC												
	Maximum Rated Power (W)	150	240											
	Mass (kg)	0.56	0.9											


*The power cord is sold separately. Ask us for the required power cord when ordering.

Please contact us for 5 mm bit type.


Optional Accessories




Torque Diagrams (for reference)



External Dimensions

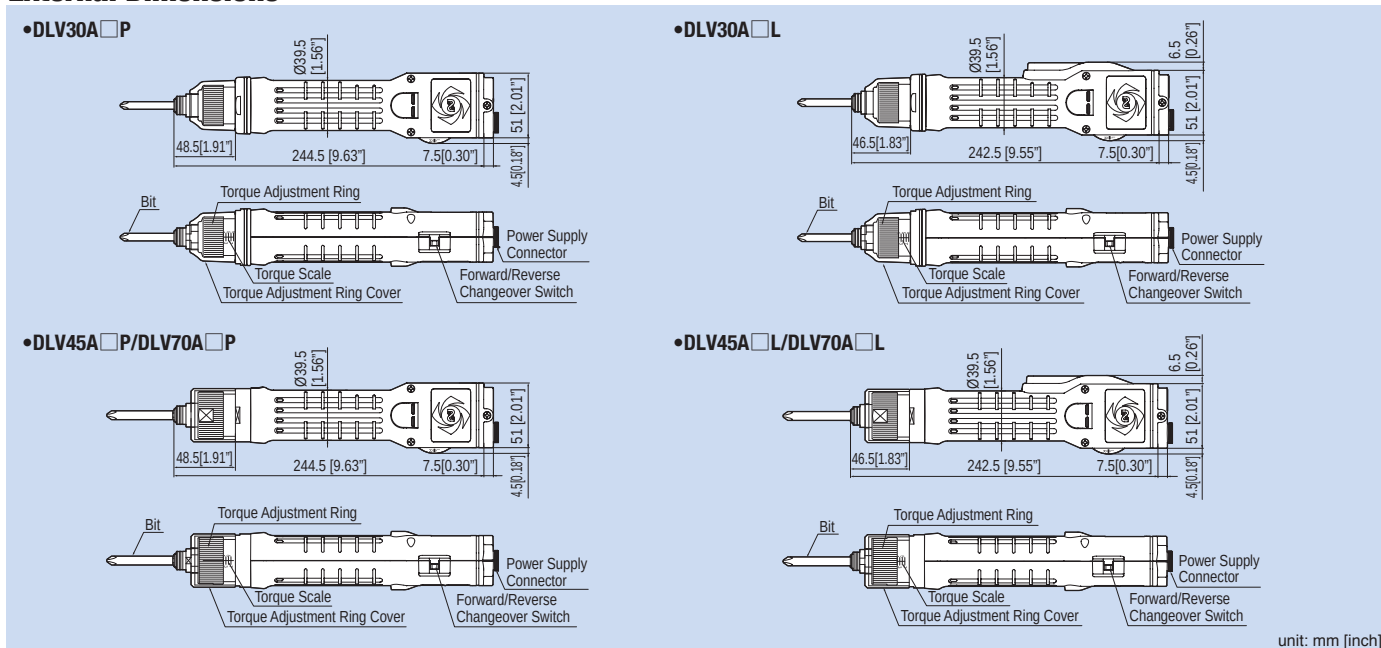


(See page 12 for external dimensions of power supply DEA0151N-AZ and DEA0241N-AZ)



delvo Brushless Type

A Series (Transformerless Type) Model DLV30A/45A/70A

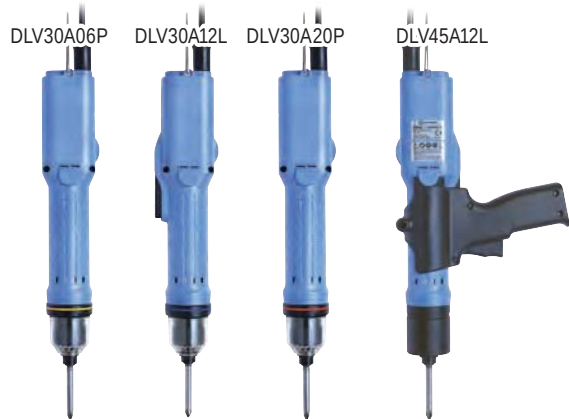





Features

Eco-friendly electric screwdrivers with built-in brushless motors in a transformerless profile

- Torque range from 0.4 to 7.0 Nm
- Speed range from 650 to 2000 min⁻¹
- Both the Lever Start and Push to Start type models are available
- Equipped with a torque adjustment ring cover
- Design conforms to the RoHS Directive and thus appeals to the environmentally conscious user
- Easily detachable Pistol Grip DLW2300 (TD00335) comes with the unit as a standard accessory (DLV45A/70A)

Specifications

Specifications			Low Speed	Standard	High Speed	Low Speed	Standard	Low Speed	
Electric Screwdriver	Model	Bit	Lever Start	DLV30A06L-AB : K	DLV30A12L-AB : K	DLV30A20L-AB : K	DLV45A06L-AB : K	DLV45A12L-AB : K	DLV70A06L-AB : K
			Push to Start	DLV30A06P-AB : K	DLV30A12P-AB : K	DLV30A20P-AB : K	DLV45A06P-AB : K	DLV45A12P-AB : K	DLV70A06P-AB : K
	Input Voltage		230 V AC, 50/60 Hz						
	Torque Adjustment		Stepless						
	Torque	Low Torque Spring*1	0.4 - 1.6 [3.5 - 14.2]				2.0 - 4.5 [17.7 - 39.8]		3.8 - 7.0 [33.6 - 62.0]
	(Nm [lbf·in])	High Torque Spring*2	1.2 - 3.0 [10.6 - 26.6]						
	Free Speed (min ⁻¹)		650	1200	2000	650	1200	650	
	Power Consumption (W)		Approx. 45						
	Screw Size	Machine Screw	2.6 - 5.0				4.5 - 6.0		5.0 - 8.0
	(mm)	Tapping Screw	2.5 - 4.0				4.0 - 5.0		4.5 - 6.0
Mass (g [lbs])		700 [1.54]				870 [1.92] (with Pistol Grip)			
Standard Accessories		• Bit NK35(No.2 × 7 × 75): 1 pc. • Suspension Bail: 1 pc. • Low Torque Spring: 1 pc. • Bit NK35(No.2 × 7 × 75): 1 pc. • Suspension Bail: 1 pc. • Pistol Grip (DLW2300)							
Bit Type			Europe		*1: Standard Accessory *2: Installed				
	unit: mm								



*1: Standard Accessory
*2: Installed

Please contact us for 5 mm bit type.

Optional Accessories

Pistol Grip
DLW2300
(Non-ESD)



Torque Adjustment Ring Cover




DLW5202




DLW5201 (Non-ESD)

Torque Diagrams (for reference)




External Dimensions


•DLV30A□P

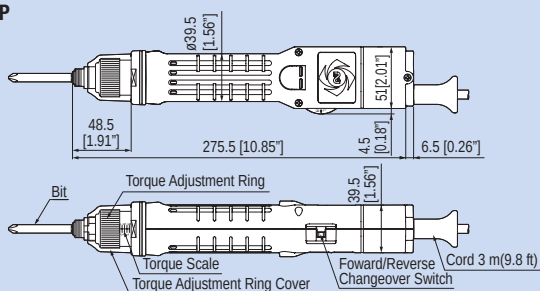


•DLV30A□L

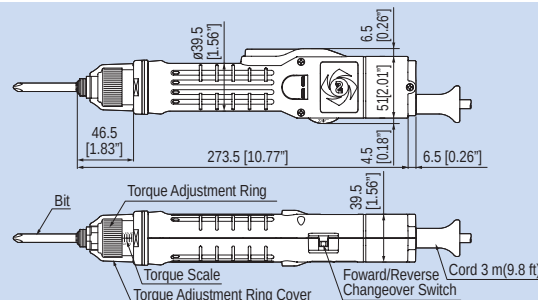


•DLV45A□P/70A06P

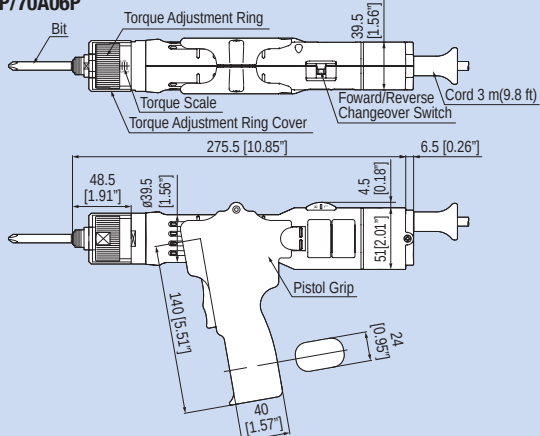

•DLV45A□L/70A06L

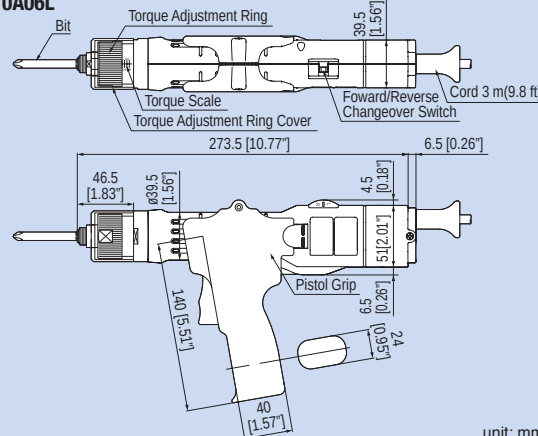

unit: mm [inch]



delvo Brushless Type

DLV02/12/16 Series



DLV02/12/16SL
-CKE



DLV02/12/16SL
-BKE



DLC16S




Features

Brushless motors are incorporated for maximum tool life


- Ergonomic grip offers greater operator comfort and increased maneuverability
- Grounded bit system standard
- Clear plastic torque adjustment cover provided as standard accessory (DLV02/12/16SL-CKE)
- ESD (electrostatic discharge) protection structure (DLV02/12/16SL-BKE)
- Compliant with CE standards
- Controllers feature an overload detection function. When an overload is detected, the controller stops the screwdriver. Operation can be resumed after the screwdriver is unloaded, and the lever released (DLC16S)
- Universal input voltage from 100 to 240 V AC for easy installation (DLC16S)
- Variable speed adjustment enables you to select optimum screw tightening speed (DLC16S)

Specifications

Model	Standard Type	DLV02SL-CKE	DLV12SL-CKE	DLV16SL-CKE
	ESD Protection Type	DLV02SL-BKE	DLV12SL-BKE	DLV16SL-BKE
Starting Method		Lever Start		
Input Voltage		20 - 30 V DC		
Torque Adjustment		Stepless		
Torque (Nm [lbf-in])		0.03 - 0.2 [0.3 - 1.8]	0.15 - 1.2 [1.3 - 10.6]	0.2 - 1.6 [1.8 - 14.2]
Free Speed (min ⁻¹)		700 - 1000		
Power Consumption (W)		48		
Screw Size (mm)	Machine Screw	1.0 - 2.2	1.4 - 3.0	2.2 - 4.0
	Tapping Screw	1.0 - 2.0	1.4 - 2.6	2.0 - 3.0
Mass (g [lbs])		470 [1.04]		




Model	DLC16S-WGB
Input Voltage	100 - 240 V AC, 50/60 Hz
Output Voltage	20 - 30 V DC
Function	Speed Control
Mass (g [lbs])	380 [0.84]



Standard Accessories


Model		DLV02	DLV12	DLV16
Bit NK36	No.0 × 3.8 × 50	1	-	-
	No.1 × 3.8 × 50	-	1	-
	No.2 × 4.5 × 50	-	1	1
Connection Cord		1		
Suspension Bail		1		

Torque Diagrams (for reference)

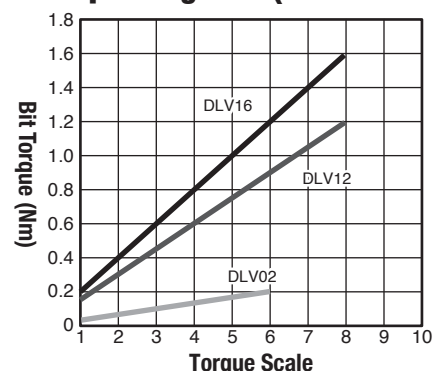


External Dimensions


•DLV02/12/16SL-CKE

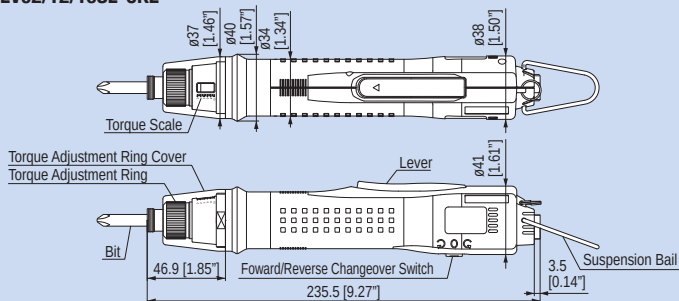

•DLC16S-WGB

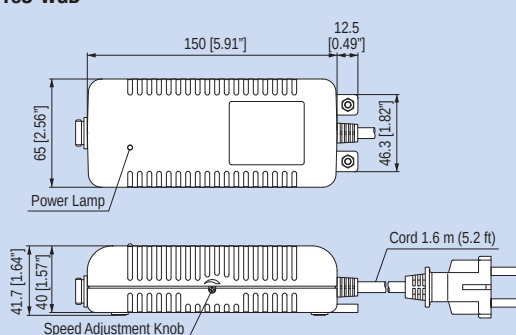

•DLV02/12/16SL-BKE

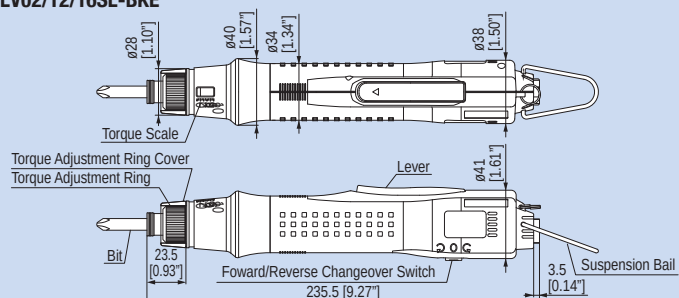

unit: mm [inch]



The light and compact body reduces operator fatigue

- unit: mm
-


Electric Screwdriver	Model	Standard Type	DLV7410A-BME	DLV7410HA-BME	DLV7420A-BME
		Clean Room Type	DLV7419A-BME	DLV7419HA-BME	DLV7429A-BME
	Starting Method		Lever Start		
	Input Voltage		40 V DC		
	Torque Adjustment		Stepless		
	Torque	(Nm [lbf·in])	0.02 - 0.2 [0.2 - 1.8]		0.15 - 0.4 [1.3 - 3.5]
	Free Speed	(min ⁻¹)	500 - 750	700 - 1000	450 - 600
	Power Consumption (W)		Approx. 10		
	Screw Size	Machine Screw	1.0 - 2.3		1.6 - 2.6
		Tapping Screw	1.0 - 2.0		1.4 - 2.3
Mass	(g [lbs])	Standard Type 230 [0.51] / Clean Room Type 275 [0.61]			

	USA	Europe	UK
Plug Shape			


Model DLC1213A-GGB or DLC1213A-HEB + Cord DLW9072

Optional Accessories




 Sleeve	 Vacuum Pickup DLP5300 (TD04342)	 Torque Adjustment Ring Cover DLW5700 (TD02875)
* Please see page 39 for details.		

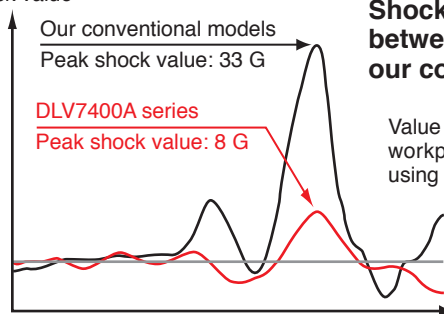

Value of shock applied to the workpiece as measured using acceleration pickup.

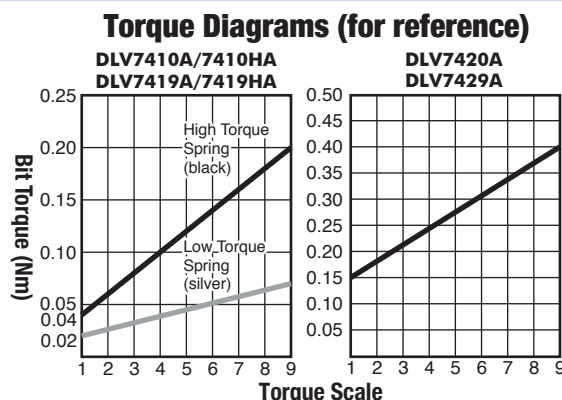

- DLC1110

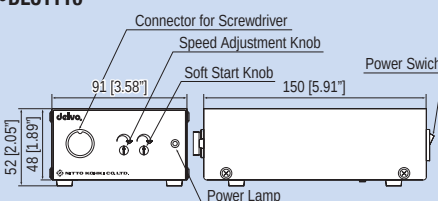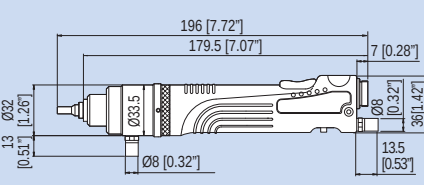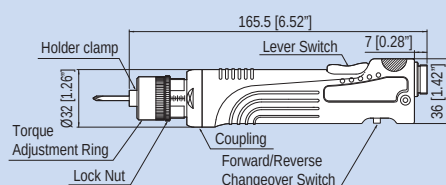

unit: mm [inch]

DLV5700 Series Non-CE

Features


For quality improvement and productivity enhancement

- Grounded bit installation mechanism
- ESD (electrostatic discharge) protection structure
- Low-shock for tightening (30 % less of standard models)
- Low swing bit mechanism
- Ergonomic design
- High-performance DC motor
- New clutch mechanism



Specifications

Electric Screwdriver	Model	DLV5720	DLV5720H	DLV5740	DLV5740H	DLV5750	
	Starting Method	Lever Start					
	Input Voltage	40 V DC			36 V DC		
	Torque Adjustment	Stepless					
	Torque (Nm [lbf-in])	0.02 - 0.2 [0.2 - 1.8]		0.15 - 0.4 [1.3 - 3.5]		0.1 - 0.55 [0.9 - 4.9]	
	Free Speed (min ⁻¹)	500 - 750	700 - 1000	450 - 600	1200 - 1800	670 - 1000	
	Power Consumption (W)	Approx. 10			Approx. 35		
	Screw Size (mm)	Machine Screw	1.0 - 2.3		1.6 - 2.6		1.0 - 3.0
		Tapping Screw	1.0 - 2.0		1.4 - 2.3		1.0 - 2.6
	Mass (g [lbs])	230 [0.51]			300 [0.66]		
Standard Accessories	• Bit NK4D(No.0 × 1.8 × 44): 1 pc. • Bit NK4D(No.0 × 2.5 × 44): 1 pc. • Connection Cord (1.5 m)DLW9081: 1 pc. • Suspension Bail: 1 pc. • Low Torque Spring: 1 pc.			• Bit NK4D(No.0 × 2.5 × 44): 1 pc. • Bit NK4D(No.1 × 4 × 44): 1 pc. • Connection Cord (1.5 m)DLW9081: 1 pc. • Suspension Bail: 1 pc.			




Model	DLC0350E	DLC0350F	DLC0350G	DLC0950E	DLC0950G
Input Voltage	100 V AC, 50/60 Hz	115 V AC, 50/60 Hz	230 V AC, 50/60 Hz	100 V AC, 50/60 Hz	230 V AC, 50/60 Hz
Plug Shape	USA		UK	USA	
Mass (g [lbs])	900 [1.98]			1800 [3.97]	


Optional Accessories




Torque Diagrams (for reference)

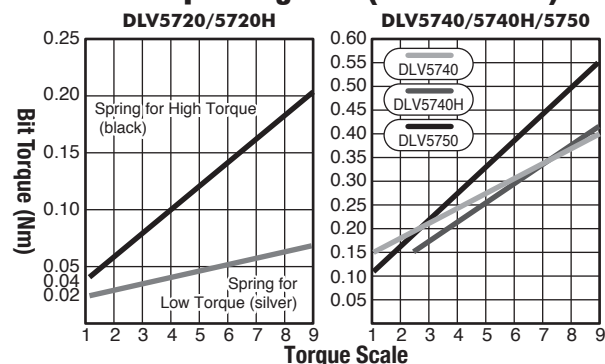

External Dimensions

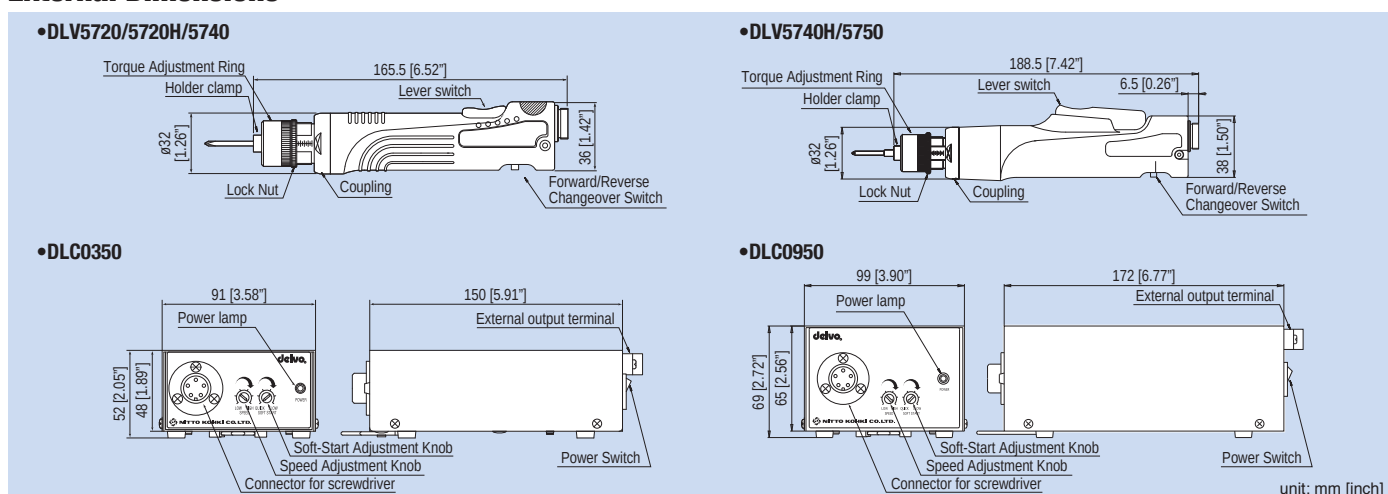



DLV5800 Series Non-CE

DLV5800 series

DLC0250E

DLC0350

Features

In response to the needs of cell production system, space-saving delvo screwdrivers are released. Controller is designed for emphasis on space-saving size and lightness.


- Clear disengagement of clutch (low-shock mechanism unavailable)
- Grounded bit installation mechanism
- ESD (electrostatic discharge) protection structure
- New lever is adopted
- Low swing bit mechanism
- Low voltage transformerless controller

Specifications

Electric Screwdriver	Model	DLV5820	DLV5820H	DLV5840
	Starting Method	Lever Start		
	Input Voltage	40 V DC		
	Torque Adjustment	Stepless		
	Torque (Nm [lbf-in])	0.02 - 0.2 [0.2 - 1.8]		
	Free Speed (min ⁻¹)	750	1000	600
	Power Consumption (W)	Approx. 10		
	Screw Size (mm)			
	Machine Screw	1.0 - 2.3		
	Tapping Screw	1.0 - 2.0		
Bit Type	Mass (g [lbs])	230 [0.51]		
	Cord Length (m)	1.5 (with connector)		
	Grounding Bit Feature	Equipped as standard		
	Standard Accessories			
		• Bit NK4D(No.0 × 1.8 × 44): 1 pc. • Bit NK4D(No.0 × 2.5 × 44): 1 pc. • Suspension Bail: 1 pc. • Connection Cord (1.5 m) DLW9081: 1 pc. • Low Torque Spring (Silver): 1 pc.		

Model	DLC0250E
Input Voltage	100 V AC, 50/60 Hz
Function	Grounded Bit Installation Mechanism
Mass (g [lbs])	300 [0.66]
Case Material	Antistatic material
Plug Shape	USA

* Electric screwdrivers DLV5800 series can be also used with DLC0350.




unit: mm


Optional Accessories





Torque Diagrams (for reference)

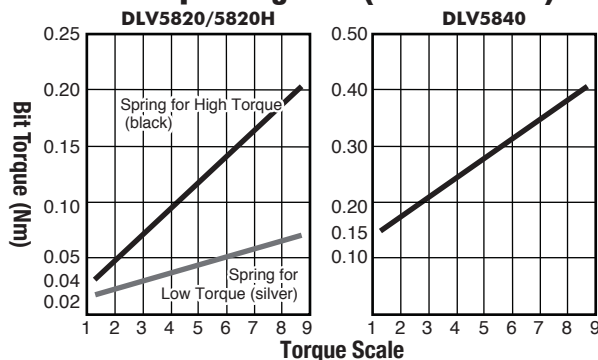

External Dimensions

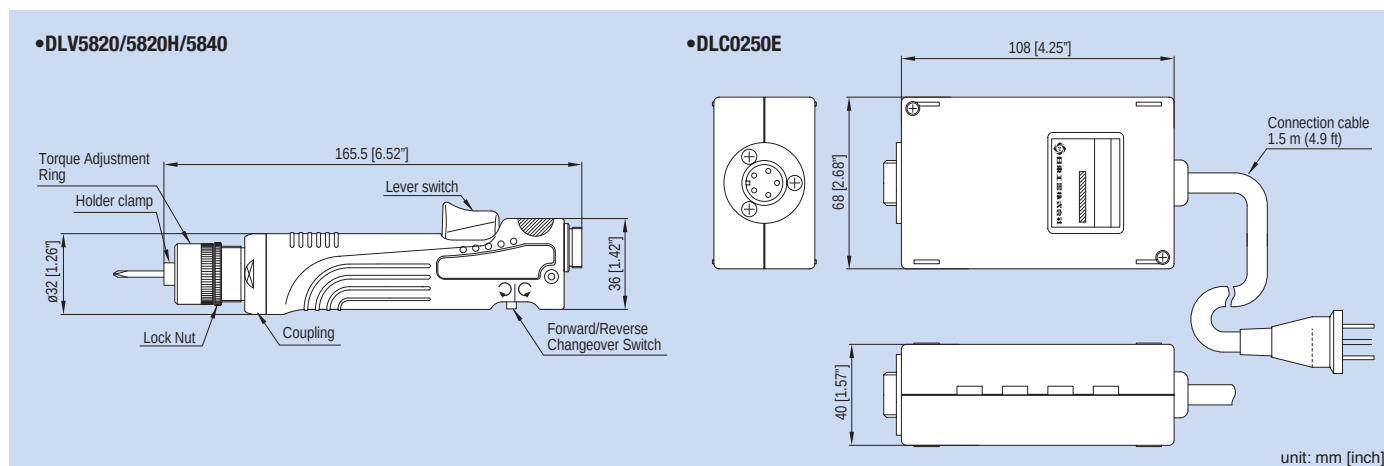



DLV7300 Series

DLV7313/7323/7333

DLV7325/7335

DLC1213A

Features

- The dedicated controller realizes high-accuracy screw tightening
- High repeatable torque accuracy
- The controller provides a soft start function. The initial speed at screwdriver startup can therefore be slowed down, effectively preventing screw heads from being scratched.
- Variable speed adjustment enables to select optimum screw tightening speed.
- DLV7325, DLV7335 meet Class 5*1 Clean Room standards

*1: Based on Nitto Kohki's standard of measurement

Specifications


	Model	Bit Shank: ø4 mm Bit Shank: Hex. 6.35 mm	Standard			Clean Room Use	
			DLV7313-CME	DLV7323-CME	DLV7333-CME	DLV7325-CME*2	DLV7335-CME*2
Electric Screwdriver	Starting Method		Lever Start				
	Input Voltage		36 V DC				
	Torque Adjustment		Stepless				
	Torque (Nm [lbf-in])		0.03 - 0.15 [0.3 - 1.3]	0.05 - 0.5 [0.4 - 4.4]	0.3 - 1.2 [2.7 - 10.6]	0.05 - 0.5 [0.4 - 4.4]	0.3 - 1.2 [2.7 - 10.6]
	Free Speed (min ⁻¹)		700 - 1000		500 - 700	700 - 1000	500 - 700
	Power Consumption (W)		Approx. 35				
	Screw Size (mm)	Machine Screw	Up to 2.0	1.0 - 3.0	2.0 - 3.5	1.0 - 3.0	2.0 - 3.5
		Tapping Screw	Up to 1.7	1.2 - 2.6	2.0 - 3.0	1.2 - 2.6	2.0 - 3.0
	Mass (g [lbs])		350 [0.77]			400 [0.88]	

*2: Vacuum pump for suction of screw is available as option. See page 40 for details of the vacuum pump.


Controller	Model	Features	Input Voltage	Control Function	Plug Shape	Mass (g [lbs])
	DLC1213A-EN	Standard	100 V AC, 50/60 Hz	Soft start, Speed control	Asia	2300 [5.07]
	DLC1213A-FE*3	Standard	115 V AC, 50/60 Hz		UK	
	DLC1213A-GE	Standard	220 V AC, 50/60 Hz		Europe	
	DLC1213A-GG	With CE Mark	230 V AC, 50/60 Hz		UK	
	DLC1213A-GGU	With CE Mark	230 V AC, 50/60 Hz		Without Plug	
	DLC1213A-HE	Standard	240 V AC, 50/60 Hz			

*3: This model is made to order.

Plug Shape	Asia	Europe	UK



Torque Diagrams (for reference)



Standard Accessories

Model	DLV7313 -CME	DLV7323 -CME	DLV7333 -CME	DLV7323 / 31 / 33-CKE	DLV7325 -CME	DLV7335 -CME	DLV7325 / 35-CKE
Bit	NK4D No.0 × 1.8 × 44	1	-	-	-	-	-
	NK4D No.0 × 2.5 × 44	1	1	-	1	-	-
	NK4D No.1 × 3 × 44	-	-	1	-	1	-
	NK4D No.1 × 4 × 44	-	1	-	1	-	-
	NK35 No.1 × 7 × 50	-	-	1	-	-	-
	NK4D No.2 × 4 × 44	-	-	1	-	1	-
	NK36 No.2 × 4.5 × 50	-	-	-	-	-	1
	NK35 No.2 × 7 × 50	-	-	1	-	-	-
Vacuum Sleeve	DLS2124	-	-	-	1	-	-
	DLS2127	-	-	-	1	1	-
	DLS2130	-	-	-	1	1	-
	DLS2134	-	-	-	-	1	-
	DLS2135	-	-	-	-	-	1
Suspension Bail	1						

Optional Accessories




This minimizes tampering or accidental turning of the torque adjustment ring once the torque is set.


Torque Adjustment Ring Cover for DLV7303 DLW5500 (TD00333)

External Dimensions


•DLV7313/7323/7333

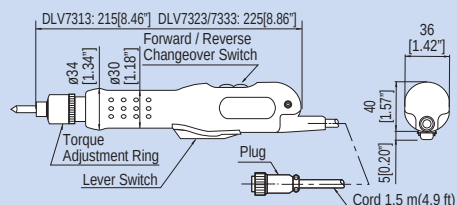



•DLV7325/7335

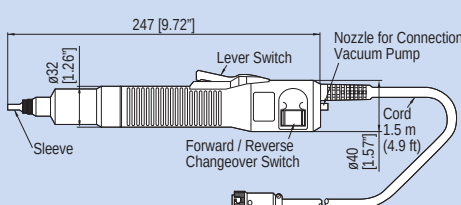

•DLC1213A

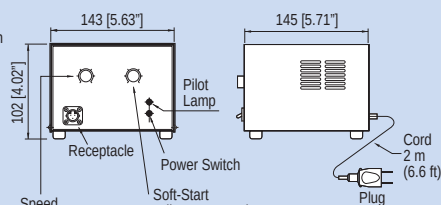

unit: mm [inch]



DLV7300-BME/BKE Series



DLC1213A





Features

Workpiece-conscious electric screwdrivers


- Statistic electricity buildup is prevented to protect workpieces from electrostatic discharge
- Minimal impact in screw tightening protects workpieces from damaging and enables stable screw tightening
- ESD (electrostatic discharge) protection structure
- Meet Class 5*1 or more Clean Room standards

*1: Based on Nitto Kohki's standard of measurement

Specifications

Specifications		ESD		ESD / Low Shock				
Electric Screwdriver	Model	Bit Shank:ø4 mm	DLV7321-BME*2	DLV7331-BME*2	DLV7319-BME*2	DLV7329-BME*2	DLV7339-BME	DLV7349-BME*2
		Bit Shank:Hex. 6.35 mm	DLV7321-BKE	DLV7331-BKE				
	Starting Method		Lever Start					
	Input Voltage		36 V DC					
	Torque Adjustment		Stepless					
	Torque (Nm [lbf-in])		0.05 - 0.50 [0.4 - 4.4]	0.30 - 1.20 [2.7 - 10.6]	0.20 - 0.40 [1.8 - 3.5]	0.25 - 0.55 [2.2 - 4.9]	0.45 - 0.95 [4.0 - 8.4]	0.55 - 1.20 [4.9 - 10.6]
	Free Speed (min ⁻¹)		700 - 1000	500 - 700	700 - 1000		500 - 700	
	Power Consumption (W)		Approx. 35					
	Screw Size (mm)		Machine Screw	1.0 - 3.0	2.0 - 3.5	2.0 - 3.0		3.0 - 3.5
		Tapping Screw	1.2 - 2.6	2.0 - 3.0	2.0 - 2.6		2.6 - 3.0	
Mass (g [lbs])		350 [0.77]			400 [0.88]			
Bit Type (mm)	For BME		For BKE		*2: These models are made to order.			
								

Model	Features	Input Voltage	Plug Shape	Control	Mass (g [lbs])
DLC1213A-ENB	Standard	100 V AC, 50/60 Hz	USA	Grounding, Soft Start, Speed Control	2300 [5.07]
DLC1213A-FEB*3	Standard	115 V AC, 50/60 Hz	USA		
DLC1213A-GGB	With CE mark	230 V AC, 50/60 Hz	Europe		
DLC1213A-HEB	Standard	240 V AC, 50/60 Hz	UK		

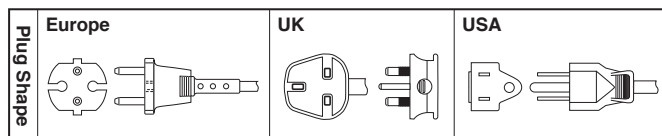

*3: This model is made to order.

Measurement Point		Conventional Product	DLV7300-B E
Handle	Static Electricity (V)	350	5
	Surface Resistance (Ω)	more than 10 ¹³	10 ⁴
Lever Switch	Static Electricity (V)	350	2
	Surface Resistance (Ω)	more than 10 ¹³	10 ⁴
Forward / Reverse Switch	Static Electricity (V)	25	2
	Surface Resistance (Ω)	more than 10 ¹³	10 ¹⁰
Power Cable	Static Electricity (V)	110	5
	Surface Resistance (Ω)	more than 10 ¹³	10 ¹⁰

Part	Material
Handle Lever Switch	Synthetic resin with carbon fiber
Power Cable	Anti-static material


* Measurement conditions (Temperature: 22 °C Humidity: 66 %)

- (1) Static electricity • Earth the measurement equipment and measuring person.
 • Grip the screwdriver five times using Ansel Edmont electronic control glove.
 • Turn on the switch of the screwdriver. • Measure each part of the screwdriver using electronic measurement equipment manufactured by Shishido electrostatic Ltd.
- (2) Surface resistance • Measure using Simco Japan surface resistivity measurement equipment.

Standard Accessories


Model	DLV7319/29-BME	DLV7339/49-BME	DLV7321-BME	DLV7331-BME	DLV7321/31-BKE
Bit	NK4D No.0 × 2.5 × 44	1	-	1	-
	NK4D No.1 × 3 × 44	-	1	-	1
	NK4D No.1 × 4 × 44	1	-	1	-
	NK35 No.1 × 7 × 50	-	-	-	1
	NK4D No.2 × 4 × 44	-	1	-	1
	NK35 No.2 × 7 × 50	-	-	-	1
Vacuum Sleeve	DLS2124	1	-	-	-
	DLS2127	1	1	-	-
	DLS2130	1	1	-	-
	DLS2134	-	1	-	-
Suspension Bail	1				

Torque Diagrams (for reference)




External Dimensions

•DLV73 1/DLV73 9

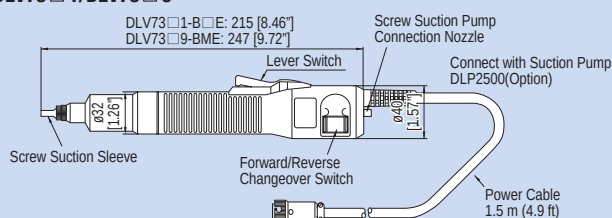

•DLC1213A- B

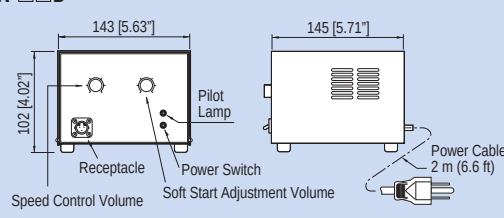

unit: mm [inch]

DLV7500/8500 Series CE




Features

Low vibration, low noise, and easy gripping in a compact design

- The easily visible torque reach light goes on when the set torque is reached
- The combination of an advanced clutch design and the auto-stop circuit assures torque accuracy
- The long life motor with a yoke made of advanced materials further assures a long service life
- Compliant with CE standard
- ESD (electrostatic discharge) protection structure (DLV7500/8500-BKE)

Specifications

Specifications		Standard		High Torque	Standard		High Torque	
Electric Screwdriver	Model	Standard Type	DLV7530-MKE	DLV7540-MKE	DLV7550-MKE	DLV8530-MKE	DLV8540-MKE	DLV8550-MKE
		ESD Protection Type	DLV7530-BKE	DLV7540-BKE	DLV7550-BKE	DLV8530-BKE	DLV8540-BKE	DLV8550-BKE
	Starting Method		Lever Start			Push to Start		
	Input Voltage		59 V DC					
	Torque Adjustment		Stepless					
	Torque (Nm [lbf-in])		0.5 - 1.7 [4.4 - 15.1]	1.2 - 2.7 [10.6 - 23.9]	2.0 - 4.5 [17.7 - 39.8]	0.5 - 1.7 [4.4 - 15.1]	1.2 - 2.7 [10.6 - 23.9]	2.0 - 4.5 [17.7 - 39.8]
	Free Speed (min ⁻¹)		1100	700	500	1100	700	500
	Screw Size	Machine Screw	2.6 - 4.0	3.5 - 5.0	4.5 - 6.0	2.6 - 4.0	3.5 - 5.0	4.5 - 6.0
Tapping Screw		2.3 - 3.5	3.0 - 4.0	4.0 - 5.0	2.3 - 3.5	3.0 - 4.0	4.0 - 5.0	
Mass (g [lbs])		650 [1.43]		750 [1.65]	650 [1.43]		750 [1.65]	
Bit Type	 unit: mm							

Measurement Point		Conventional Product	DLV7500/8500-BKE
Handle	Static Electricity (V)	350	5
	Surface Resistance (Ω)	more than 10 ¹³	10 ⁴
Lever Switch	Static Electricity (V)	350	2
	Surface Resistance (Ω)	more than 10 ¹³	10 ⁴
Forward / Reverse Switch	Static Electricity (V)	25	2
	Surface Resistance (Ω)	110	5
Connection Cable	Static Electricity (V)	110	5
	Surface Resistance (Ω)	more than 10 ¹³	10 ¹⁰

Part	Material
Handle Lever Switch	Synthetic resin with carbon fiber
Power Cable	Anti-static material

* Measurement conditions (Temperature: 22 °C Humidity: 66 %)

(1) Static electricity • Earth the measurement equipment and measuring person.

• Grip the screwdriver five times using Ansel Edmont electronic control glove.


• Turn on the switch of the screwdriver. • Measure each part of the screwdriver using electronic measurement equipment manufactured by Shishido electrostatic Ltd.

(2) Surface resistance • Measure using Simco Japan surface resistivity measurement equipment.

Standard Accessories


Model		DLV7530 / 7540 / 8530 / 8540	DLV7550 / 8550-MKE	DLV7550 / 8550-BKE
Bit NK35	No.1 × 7 × 75	1	-	-
	No.2 × 7 × 75	1	1	1
	No.3 × 7 × 50	-	1	1
Pistol Grip	DLW2300	-	1	-
	DLW2300ESD	-	-	1
Spare Carbon Brush		2		
Connection Cord		1		
Suspension Bail		1		

Torque Diagrams (for reference)


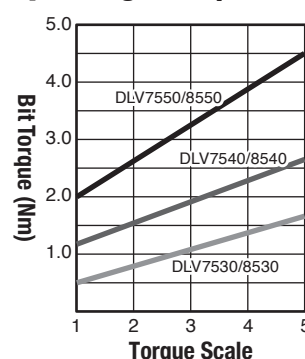


External Dimensions

•DLV7500 series

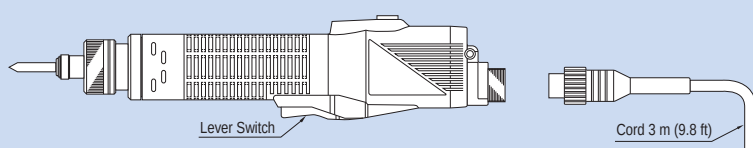

•DLV8500 series

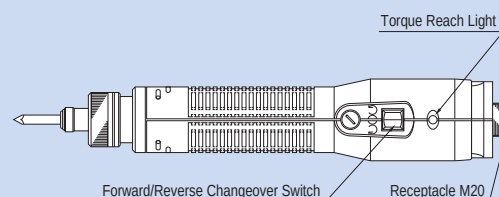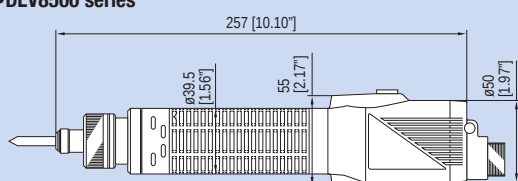

unit: mm [inch]



DLC4511-GGB





DLR1510-JE

Specifications



Model	DLC4511-GGB	DLR1510-JE
Function	Stepless speed adjustment 80 - 100 % Soft start: adjustable time setting of slow speed (max. 3 sec.) External output signals: start and torque up Electro-static discharge(ESD) control	Screw counting: OK lamp and buzzer for notification Variable non-operation time Setting protection by key lock switch Setting by touch switch for easy operation External output signals: Start, Torque up, Count up & Cycle OK
Input Voltage	230 V AC, 50/60 Hz	
Mass (g [lbs])	3500 [7.72]	5100 [11.24]
Plug Shape	Europe 	

External Dimensions

•DLC4511-GGB

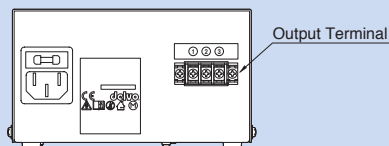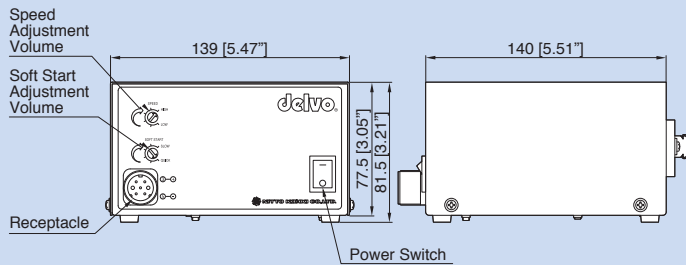


•DLR1510-JE

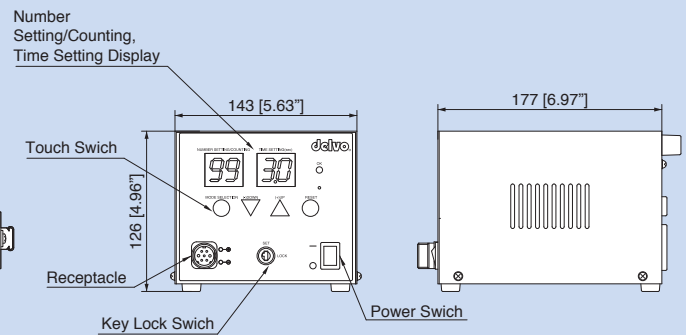

Unit: mm [inch]

MEMO

Handwriting practice lines consisting of 20 sets of three horizontal dotted lines.



DLV7000/8000 Series Non-CE





Features

100 / 115 V AC Direct Transformerless Precision Miniature Screw Type

- A built-in controller model saves space and facilitates layout change
- High repetitive torque accuracy
- Available with lever type (DLV7000 series) for each screw alignment and push to start type (DLV8000 series) for rapid screw tightening
- The high-speed type (DLV7031/8031) available at 1200 min⁻¹ for improving work efficiency (100 V AC only)

Specifications

Specifications		Standard				High Speed		
Electric Screwdriver	Model	100 V AC Input	DLV7020-EMN	DLV7030-EMN	DLV8020-EMN	DLV8030-EMN	DLV7031-EMN	DLV8031-EMN
		115 V AC Input	DLV7020-FME*1	DLV7030-FME*1	DLV8020-FME*1	DLV8030-FME*1		
	Starting Method	Lever Start			Push to Start		Lever Start	Push to Start
	Torque Adjustment	Stepless						
	Torque (Nm [lbf-in])	0.05 - 0.55 [0.4 - 4.9]	0.3 - 1.1 [2.7 - 9.7]	0.1 - 0.55 [0.9 - 4.9]	0.3 - 1.1 [2.7 - 8.9]	0.3 - 1.0 [2.7 - 8.9]		
	Free Speed (min ⁻¹)	900	650	900	650	1200		
	Power Consumption (W)	Approx. 25					Approx. 30	
	Screw Size	Machine Screw	1.0 - 3.0	2.0 - 3.5	1.0 - 3.0	2.0 - 3.5	2.0 - 3.0	
	Tapping Screw	1.2 - 2.6	2.0 - 3.0	1.2 - 2.6	2.0 - 3.0	2.0 - 3.0		
Mass (g [lbs])	400 [0.88]			410 [0.90]		400 [0.88]	410 [0.90]	
Bit Type			Asia		*1: These models are made to order.			
	unit: mm							
	Plug Shape							

Standard Accessories

Model	DLV7020 / 8020	DLV7030 / 8030 / 7031 / 8031
Bit NK4D	No.0 × 2.5 × 44	1
	No.1 × 3 × 44	-
	No.1 × 4 × 44	1
	No.2 × 4 × 44	-
Suspension Bail	1	


Optional Accessories



This minimizes tampering or accidental turning of the torque adjustment ring once the torque is set.


Torque Adjustment Ring Cover
DLW5300 (TD00332)

Torque Diagrams (for reference)

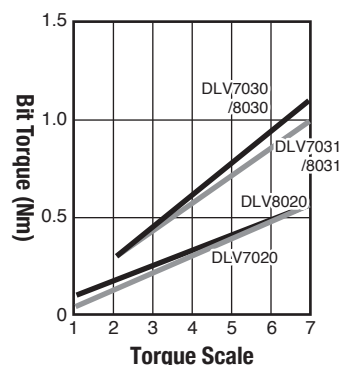


External Dimensions

•DLV7020/7030/7031

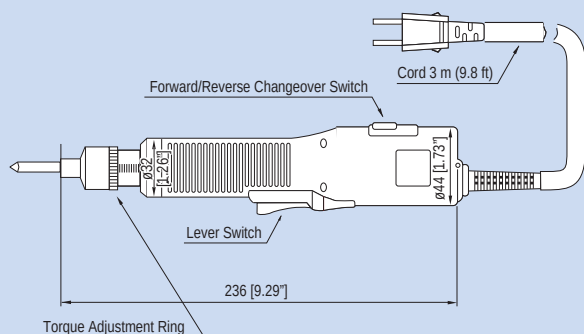

•DLV8020/8030/8031

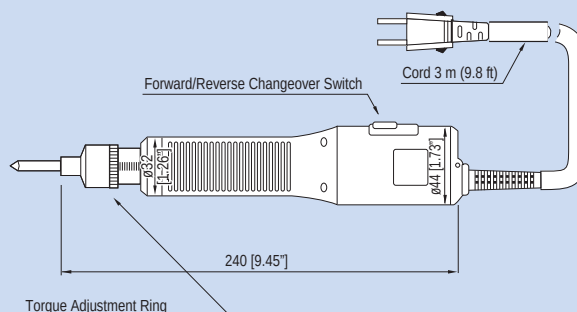

unit: mm [inch]

DLV7100/7200/8100/8200 Series Non-CE






Features

Long Time Selling, Reliable, and High Performance

- Transformerless space saving model built in automatic stop circuit
- Combination of unique clutch mechanism and automatic stop circuit maintains high repetitive torque accuracy
- The lever start type DLV7100 / 7200 series is suited for temporarily tightening screws and tightening screws set at angles
- The DLV8100 / 8200 series is push to start type for continuous screw tightening
- The high speed type DLV7200 / 8200 series enhances working efficiency
- The high torque type DLV7251 / 8150 / 8251 series is equipped with a grip, which is useful for tightening big screws like 6 mm machine screws

Specifications


Specifications		Standard			High Speed			High Torque	Standard			High Torque	High Speed			High Torque	
Electric Screwdriver	Model	Bit Shank: Hex. 5 mm (0.2") Bit Shank: Hex. 6.35 mm (1/4")	DLV7120-FJE	DLV7130-FJE	DLV7140-FJE	DLV7221-FJE	DLV7231-FJE	DLV7241-FJE	DLV7251-FJE	DLV8120-FJE	DLV8130-FJE	DLV8140-FJE	DLV8150-FJE	DLV8221-FJE	DLV8231-FJE	DLV8241-FJE	DLV8251-FJE
	Starting Method	Lever Start								Push to Start							
	Input Voltage	115 V AC, 50/60 Hz															
	Torque Adjustment	Stepless															
	Torque	(Nm) [lbf-in]	0.35 - 0.70 [3.10 - 6.20]	0.5 - 1.7 [4.4 - 15.1]	1.2 - 3.0 [10.6 - 26.6]	0.35 - 0.70 [3.10 - 6.20]	0.5 - 1.7 [4.4 - 15.1]	1.2 - 3.0 [10.6 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	0.35 - 0.70 [3.10 - 6.20]	0.5 - 1.7 [4.4 - 15.1]	1.2 - 3.0 [10.6 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	0.35 - 0.70 [3.10 - 6.20]	0.5 - 1.7 [4.4 - 15.1]	1.2 - 3.0 [10.6 - 26.6]	2.0 - 4.5 [17.7 - 39.8]
	Free Speed	(min ⁻¹)	900	900	600	1800	1800	1100	700	900	900	600	400	1800	1800	1100	700
	Power Consumption	(W)	Approx. 35			Approx. 45				Approx. 35			Approx. 45				
	Screw Size	Machine Screw	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	4.5 - 6.0	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	4.5 - 6.0	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	4.5 - 6.0
		Tapping Screw	2.6 - 3.0	2.3 - 3.5	3.5 - 4.0	2.6 - 3.0	2.3 - 3.5	3.0 - 4.0	4.5 - 5.0	2.6 - 3.0	2.3 - 3.5	3.5 - 4.0	4.5 - 5.0	2.6 - 3.0	2.3 - 3.5	3.0 - 4.0	4.0 - 5.0
Mass	(g [lbs])	700 [1.54]			890 [1.96]				690 [1.52]			890 [1.96]					
Bit Type (mm)	For FJE		For FKE			Asia		* All models of FJE / FKE series are made to order.									
																	

* All models of FJE / FKE series are made to order.

Standard Accessories


Model	FJE	FKE except DLV7251 / 8150 / 8251-FKE	DLV7251 / 8150 / 8251-FKE
Bit			
NK31 No.1 × 6 × 70	1	-	-
NK31 No.2 × 6 × 70	1	-	-
NK31 No.1 × 7 × 75	-	1	-
NK35 No.2 × 7 × 75	-	1	1
NK35 No.3 × 7 × 50	-	-	1
Pistol Grip (DLW2300)	-	1	1
Spare Carbon Brush		2	
Connection Cord		1	
Suspension Bail		1	

Torque Diagrams (for reference)

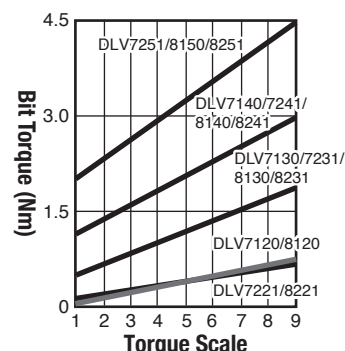


External Dimensions


•DLV7120/7130/7140/7221/7231/7241

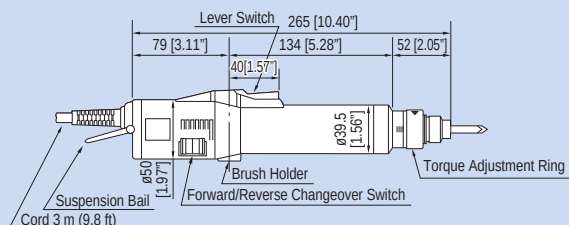


•DLV8120/8130/8140/8221/8231/8241

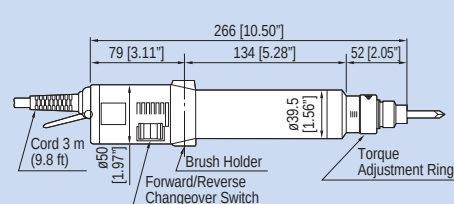


•DLV7251

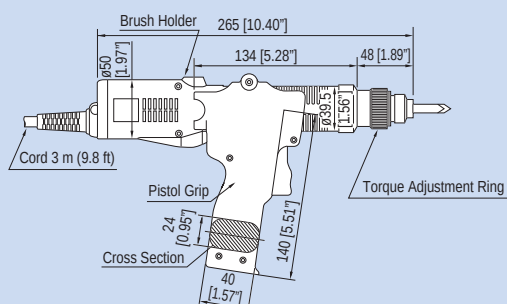

•DLV8150/8251

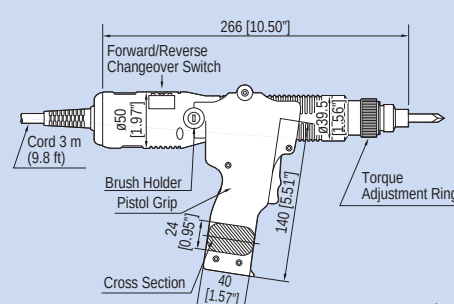

unit: mm [inch]



DLV7104/8104/8204 Series Non-CE





Features

The most popular models have been redesigned

- Equipped with bit grounding mechanism
- Long-life cam is utilized
- The clear plastic torque adjustment ring cover minimizes unintentional tampering of the preset torque
- The changeover switch enables operators to change forward/reverse rotation with a single hand
- The ergonomically designed grip can be held tightly to resist against tightening reaction force, resulting in reduced operator fatigue

Specifications


Specifications		Standard						High Torque	High Speed		
Model	Plug Shape: USA	DLV7124-MKE	DLV7134-MKE	DLV7144-MKE	DLV8124-MKE	DLV8134-MKE	DLV8144-MKE	DLV8154-MKE	DLV8224-MKE	DLV8234-MKE	DLV8244-MKE
	Plug Shape: UK	DLV7124-MKH	DLV7134-MKH	DLV7144-MKH	DLV8124-MKH	DLV8134-MKH	DLV8144-MKH	DLV8154-MKH	DLV8224-MKH	DLV8234-MKH	DLV8244-MKH
Electric Screwdriver	Starting Method	Lever Start				Push to Start					
	Input Voltage	230 V AC, 50/60 Hz									
	Torque Adjustment	Stepless									
	Torque (Nm)	0.25 - 0.75	0.5 - 1.7	1.2 - 3.0	0.25 - 0.75	0.5 - 1.7	1.2 - 3.0	2.0 - 4.5	0.35 - 0.7	0.5 - 1.7	1.2 - 3.0
	[lbf-in]	[2.2 - 6.6]	[4.4 - 15.1]	[10.6 - 26.6]	[2.2 - 6.6]	[4.4 - 15.1]	[10.6 - 26.6]	[17.7 - 39.8]	[3.1 - 6.2]	[4.4 - 15.1]	[10.6 - 26.6]
	Free Speed (min ⁻¹)	900		600	900		600	400	2000	1800	1100
	Power Consumption (W)	35						45			
	Screw Size (mm)	Machine Screw	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	4.5 - 6.0	2.6 - 3.0	2.6 - 4.0
Tapping Screw		2.3 - 3.0	2.3 - 3.5	3.0 - 4.0	2.3 - 3.0	2.3 - 3.5	3.0 - 4.0	4.5 - 5.0	2.3 - 3.0	2.3 - 3.5	3.0 - 4.0
Mass (g [lbs])		720 [1.59]			710 [1.57]			910 [2.01]	710 [1.57]		
Bit Type			Plug Shape	For MKE		For MKH					
	unit: mm			USA	UK						
											

Please contact us for 5 mm bit type.

Standard Accessories


Model		MKE/MKH	8154-MKE/MKH
Bit NK35	No.1 × 7 × 75	1	-
	No.2 × 7 × 75	1	1
	No.3 × 7 × 50	-	1
Spare Carbon Brush		2	
Suspension Bail		1	

Torque Diagrams (for reference)

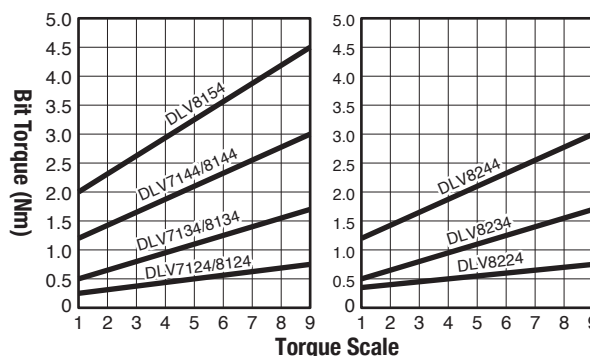


External Dimensions


•DLV7124 / 7134 / 7144

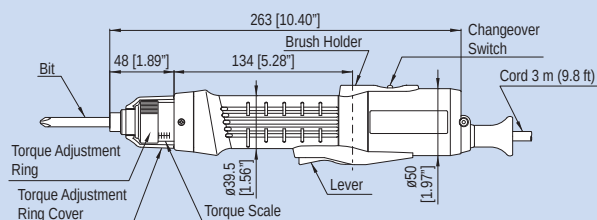

•DLV8154

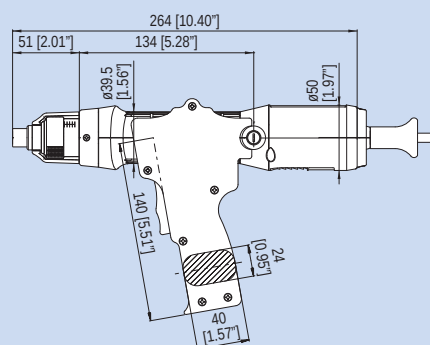

•DLV8124 / 8134 / 8144 / 8224 / 8234 / 8244

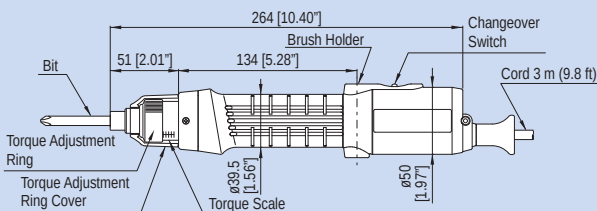

unit: mm [inch]

Screw Fastening Counter Series

Prevents human error with various functions. * Special models available on request

The error is detected based on the set tightening time.

Self adjustable timer function

The optimum value of screw tightening time is set from the actual screw tightening.





The best time is
X seconds per screw



Count Correction Function

Does not count when error is detected.




Error !



Human error
prevention

Link Connection Function

Multiple screwdrivers can be linked.
The other screwdrivers will be in standby state.

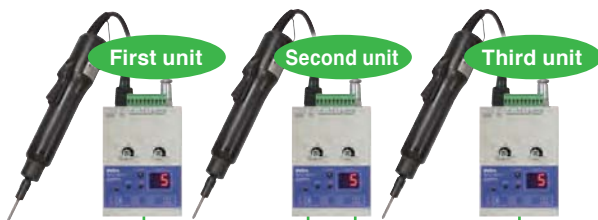


Link Connection

Link Connection

Count Return Function

The remaining number of screw tightening
is returned when the rotation is reversed.




Reverse



Return one count

Driver Lock Function

Unnecessary screwdrivers are locked in conjunction
with the workpiece sensor.

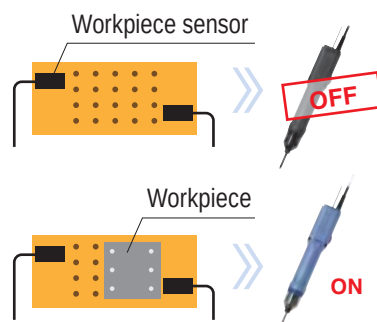

Lock
when workpiece is
not in place !




Screw Fastening Counter

DLR5640-WN

- Functions of the controller and counter are integrated into a single unit.
- Equipped with Linear Start Function that gradually increases the rotation speed at start.
- Universal power input for use anywhere in the world.




Front and Rear Panels

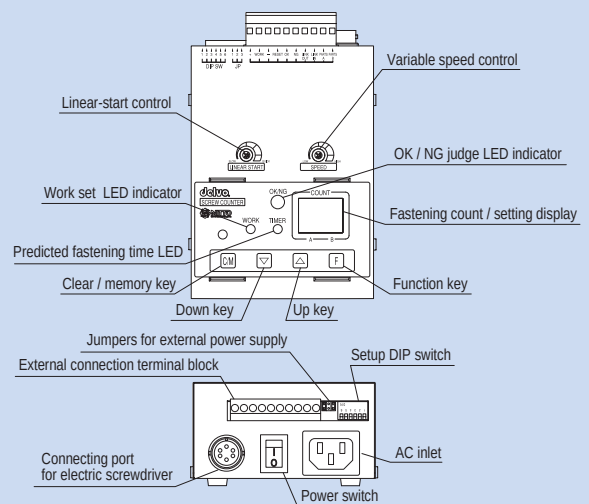


DLR5040A-WE

- Compact and lightweight model.
- A wide range of SPC screwdriver types are available.

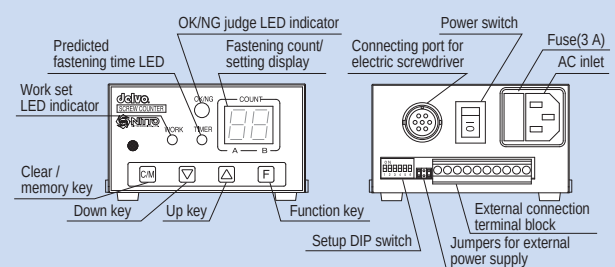

DLR5340-WE

- Three dedicated screwdrivers can be connected.
- Eight kinds of screw fastening conditions can be stored in internal memory.

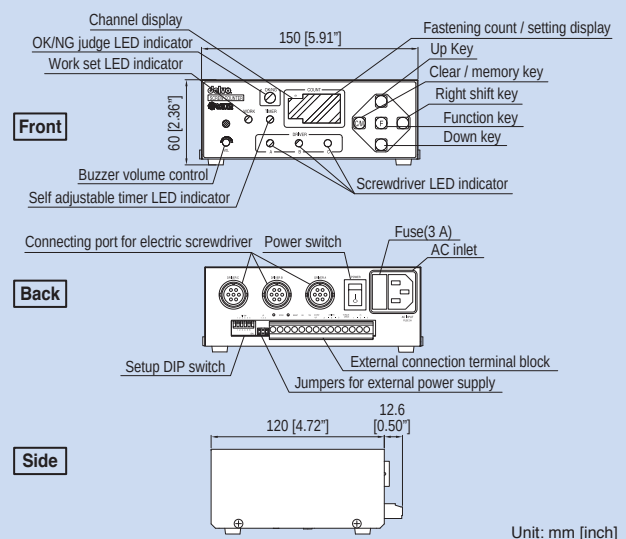

Unit: mm [inch]

Function List

	Self adjusting timer function	Count correct function	Link connection function	Count return function	Driver lock function	Number of connecting ports
DLR5640-WN	•	•	•	•	•	1
DLR5040A-WE	•	•	•	•	•	1
DLR5340-WE	•	•		•	•	3



Features


The self-adjustable timer function automatically assesses the time required to complete fastening each screw and reflects it on the judging time setting

- Ideally suited for the assembly lines of vehicles and electrical equipment requiring reliable screw fastening
- The controller receives signals from electric screwdrivers to provide highly reliable screw fastening control
- Functions of the controller and counter are integrated into a single unit
- Count Return Function: When a screw is loosened, a reverse signal output from the electric screwdriver reverses the count by one
- The self-adjustable timer function automatically assesses the time required to complete tightening each screw and reflects it on the judging time setting
- The Count Correction Function does not count elevated screws or double fastening as fastening errors
- External Count Function: To be available to various assembling jobs, the DLR5640 enables counting of two kinds of parts (up to 9 counts each) in addition to the screw tightening counting. These kinds of counting can be used together.

- Link Connection Function: You can build up a simple sequential screw tightening system by connecting the DLR5640 screw tightening counters in series without using any external controller such as a programmable controller
- Driver Lock Function prevents unexpected start of screwdrivers
- Desktop or wall-hung installation is available
- Input voltage range from 100 V AC to 240 V AC is acceptable in any part of the world

Specifications

Model	DLR5640-WN
Count	1 - 99
Counting Method	Count-up / Count-down
Count Correction Function	Count normal fastening only
Self Adjustable Timer Setting	0.01 to 0.99 sec.
Work Detection Function	Yes (1 terminal) / No
External Count Input	2 terminals (PARTS A / PARTS B)
Work Installation Timer Setting	0 to 9.5 sec.
OK Output Timer Setting	0 to 9.5 sec.
NG Alarm	ON(1) / ON(2) / OFF
OK Buzzer	ON(1) / ON(2) / ON(3) / OFF
Count Return Function	ON / OFF
NG Judge Timing	WORK SET / DRIVER ON
Automatic / Manual OK Judge	AUTO / MANUAL
Screwdriver Lock Function	ON / OFF
Multiple Link	Up to 10 counters can be connected.
External Inputs on Terminal Block	SENSOR / RESET / LINK-IN / PARTS A / PARTS B
External Outputs on Terminal Block	OK / NG / LINK-OUT
Parameter Memory	Parameters stored in internal nonvolatile memory
Screwdriver Control	SPEED / LINEAR START
Input Voltage	100 - 240 V AC, 50/60 Hz
Screwdriver Power Supply	33 V DC, 1.5 A
External Dimensions (mm [inch])	W101 x D140 x H57 [W3.98" x D5.51" x H2.24"]
Mass (g [lbs])	800 [1.76]
Accessories	2 m Power cord with USA plug Suspension bail (2 pcs.)




Example of use together with a sensor available in the market



The example of installation

LINK Function (Commom to DLR5040A & DLR5640)

When counters are connected and activated in the screw fastening sequence as shown below, all screwdrivers are on standby except the first one in the sequence. Only when the first screw fastening is finished, can the next screwdriver change from standby to ready. When the last fastening in the sequence is finished, the first screwdriver is once again ready and the sequence can be repeated again.
N.B. Up to 10 screwdriver/counter sets can be connected to the LINK.

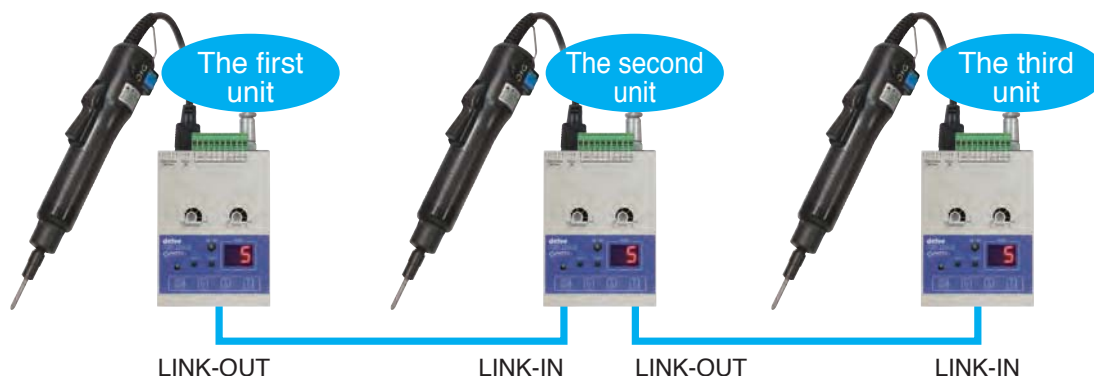

Screwdrivers designed for DLR5640-WN Non-CE



DLV7410A/7410HA/7420A-SPC




DLV7321/7331-SPC



DLR5640-WN

Specifications

Model		DLV7410A-SPC	DLV7410HA-SPC	DLV7420A-SPC	DLV7321-SPC	DLV7331-SPC
Starting Method		Lever Start				
Torque Adjustment		Stepless				
Torque (Nm [lbf-in])		0.02 - 0.2 [0.2 - 1.8]		0.15 - 0.4 [1.3 - 3.5]	0.1 - 0.5 [1.9 - 4.4]	0.3 - 1.2 [2.7 - 10.6]
Free Speed (min ⁻¹)		500 - 750	700 - 1000	450 - 600	300 - 1000	200 - 700
Power Consumption (W)		Approx. 10			Approx. 35	
Screw Size (mm)	Machine Screw	1.0 - 2.3		1.6 - 2.6	1.0 - 3.0	2.0 - 3.5
	Tapping Screw	1.0 - 2.0		1.4 - 2.3	1.2 - 2.6	2.0 - 3.0
Electrostatic Countermeasure		Complied with EN100015-1				
Mass (g [lbs])		230 [0.51]			350 [0.77]	
Cord Length (m)		1.5 (with connector)				
Grounding Bit Feature		Equipped as standard				



Combinations with Electric Screwdrivers

Screwdriver Model	Connection	Remarks
DLV7410A / 7410HA / 7420A-SPC	The cord comes with screwdriver	Screwdriver for the screw fastening counter only
DLV7321 / 7331-SPC	Direct connection to power source	
DLV7410A / 7410HA / 7420A / 7419A / 7419HA / 7429A-BMN	Optional conversion cord (TD02925 DLW9072)	General-purpose screwdriver *1

*1: The Count Return Function is not available.

Optional Accessories



DLW9072(TD02925)



Torque Adjustment Ring Cover
(DLW5700: DLV7400A-SPC
DLW5300: DLV7300-SPC)

This minimizes tampering or accidental turning of the torque adjustment ring once the torque is set.



Specifications

Model	DLR5040A-WE
Count	1 - 99
Counting Method	Count-up / Count-down
Count Correction Function	Count normal fastening only
Self Adjustable Timer Setting	0.01 to 0.99 sec.
Work Detection Function	Yes (1 terminal) / No
External Count Input	2 terminals (PARTS A / PARTS B)
Work Installation Timer Setting	0 to 9.5 sec.
OK Output Timer Setting	0 to 9.5 sec.
NG Alarm	ON(1) / ON(2) / OFF
OK Buzzer	ON(1) / ON(2) / ON(3) / OFF
Count Return Function	ON / OFF
NG Judge Timing	WORK SET / DRIVER ON
Automatic / Manual OK Judge	AUTO / MANUAL
Screwdriver Lock Function	ON / OFF
Multiple Link	Up to 10 counters can be connected.
External Inputs on Terminal Block	SENSOR / RESET / LINK-IN / PARTS A / PARTS B
External Outputs on Terminal Block	OK / NG / LINK-OUT
Parameter Memory	Parameters stored in internal nonvolatile memory
Input Voltage	100 - 240 V AC, 50/60 Hz
External Dimensions (mm [inch])	W100 x D120 x H60 [W3.94" x D4.72" x H2.36"]
Mass (g [lbs])	470 [1.04]

Accessory: 2 m cord with UL three-prong plug. This product is for use outside Japan.

Features

For prevention of human fastening errors and enhanced fastening management accuracy

- Ideally suited for the assembly lines of vehicles and electrical equipment requiring reliable screw fastening
- The controller receives signals from electric screwdrivers to provide highly reliable screw fastening control
- Count Return Function: When a screw is loosened, a reverse signal output from the electric screwdriver reverses the count by one
- The Count Correction Function does not count elevated screws or double fastening
- Input voltage range from 100 to 240 V AC is acceptable in any part of the world
(The screwdrivers to be used in combination with the counter require input power supplies that are written on the respective nameplate)
- Link Connection Function: You can build up a simple sequential screw tightening system by connecting the DLR5040A-WE screw tightening counters in series without using any external controller such as a programmable controller
- Driver Lock Function prevents unexpected start of screwdrivers
- Compact and Lightweight (Compared with our conventional models decreased by 30 % in volume and by 38 % in mass)
- SPC type screwdrivers for DLR5040A-WE are designed on the basis of established transformerless screwdrivers

LINK Function

When counters are connected and activated in the screw fastening sequence as shown below, all screwdrivers are on standby except the first one in the sequence. Only when the first screw fastening is finished, can the next screwdriver change from standby to ready. When the last fastening in the sequence is finished, the first screwdriver is once again ready and the sequence can be repeated again.

N.B. Up to 10 screwdriver/counter sets can be connected to the LINK.



Example of use together with a sensor available in the market

DLR5340-WE Non-CE



Features

Up to three sets screwdrivers can be connected to one counter

- Up to eight kinds of screw fastening conditions can be stored in internal memory for a wide variety of assembly work
- Count-up signal outputs
- Space saving
- The Count Correction Function does not count elevated screws or double fastening as fastening errors
- Count Return Function: When a screw is loosened, a reverse signal output from the electric screwdriver reverses the count by one

Specifications

Model	DLR5340-WE
Count	0 - 99
Counting Method	Count-up / Count-down
Count Correction Function	Count normal fastening only
Self Adjustable Timer Setting	0.01 to 2.50 sec.
Work Detection Function	Yes (1 terminal) / No
Work Installation Timer Setting	0 to 9.5 sec.
OK Output Timer Setting	0 to 9.5 sec.
NG Alarm	ON(1) / ON(2) / OFF
OK Buzzer	ON(1) / ON(2) / ON(3) / ON(4) / ON(5) / OFF
Count Return Function	ON / OFF
Screwdriver Lock Function	ON / OFF
Screwdriver Cord Connection	Single cord connection (Signal and power lines)
External Inputs on Terminal Block	SENSOR / RESET / TORQUE CHECK / ch1/2/3
External Outputs on Terminal Block	OK / NG / COUNT-UP / DRIVER A/B/C
Input Voltage	100 - 240 V AC, 50/60 Hz
External Dimensions (mm [inch])	W150 x D120 x H60 [W5.91" x D4.72" x H2.36"]
Mass (g [lbs])	620 [1.37]

Accessory: 2 m cord with UL three-prong plug. This product is for use outside Japan.

Dedicated Screwdrivers for DLR5040A-WE and DLR5340-WE Non-CE

delvo

Small



Specifications


Specifications		Miniature Screw (1.0 - 3.5 mm)					
Model	Lever Start	DLV7020-SPC	DLV7030-SPC	DLV7031-SPC	-	-	-
	Push to Start	-	-	-	DLV8020-SPC	DLV8030-SPC	DLV8031-SPC
Input Voltage		100 V AC, 50/60 Hz					
Torque Adjustment		Stepless					
Torque (Nm [lbf·in])		0.05 - 0.55 [0.4 - 4.9]	0.30 - 1.10 [2.7 - 9.7]	0.30 - 1.00 [2.7 - 8.9]	0.10 - 0.55 [0.9 - 4.9]	0.30 - 1.10 [2.7 - 9.7]	0.30 - 1.00 [2.7 - 8.9]
Free Speed (min ⁻¹)		900	650	1200	900	650	1200
Power Consumption (W)		Approx. 25		Approx. 30	Approx. 25		Approx. 30
Screw Size (mm)	Machine Screw	1.0 - 3.0	2.0 - 3.5	2.0 - 3.0	1.0 - 3.0	2.0 - 3.5	2.0 - 3.0
	Tapping Screw	1.2 - 2.6	2.0 - 3.0		1.2 - 2.6	2.0 - 3.0	
Bit Type		A					
Mass (g [lbs])		380 [0.84]			390 [0.86]		
Cord Length (m)		3 (with connector)					
Bit Grounding		Equipped as standard					



		Machine Screw (2.6 - 8.0 mm)				
Model	Lever Start	DLV7120-SPC	DLV7130-SPC	DLV7140-SPC	DLV7231-SPC	DLV7241-SPC
	Push to Start	DLV8120-SPC	DLV8130-SPC	DLV8140-SPC	DLV8231-SPC	DLV8241-SPC
Input Voltage		100 V AC, 50/60 Hz *1				
Torque Adjustment		Stepless				
Torque (Nm [lbf·in])		0.35 - 0.70 [3.10 - 6.20]	0.50 - 1.70 [4.4 - 15.1]	1.20 - 3.00 [10.6 - 26.6]	0.50 - 1.70 [4.4 - 15.1]	1.20 - 3.00 [10.6 - 26.6]
Free Speed (min ⁻¹)		1000		700	2000	1200
Power Consumption (W)		35			45	
Screw Size (mm)	Machine Screw	2.6 - 3.0	2.6 - 4.0	3.5 - 5.0	2.6 - 4.0	3.5 - 5.0
	Tapping Screw	2.3 - 3.0	2.5 - 3.5	3.0 - 4.0	2.5 - 3.5	3.0 - 4.0
Bit Type		B *2				
Mass (g [lbs])		710 [1.57] (7100series) / 670 [1.48] (8100series)			710 [1.57] (7200series) / 670 [1.48] (8200series)	
Cord Length (m)		3 (with connector)				
Bit Grounding		Equipped as standard				



		Machine Screw (2.6 - 8.0 mm)	
Model	Lever Start	-	DLV7251-SPC
	Push to Start	DLV8150-SPC	DLV8251-SPC
Input Voltage		100 V AC, 50/60 Hz *1	
Torque Adjustment		Stepless	
Torque (Nm [lbf·in])		2.0 - 4.5 [17.7 - 39.8]	
Free Speed (min ⁻¹)		450	700
Power Consumption (W)		45	
Screw Size (mm)	Machine Screw	4.5 - 6.0	
	Tapping Screw	4.0 - 5.0	
Bit Type		C	
Mass (g [lbs])		810 [1.79]	
Cord Length (m)		3 (with connector)	
Bit Grounding		Equipped as standard	

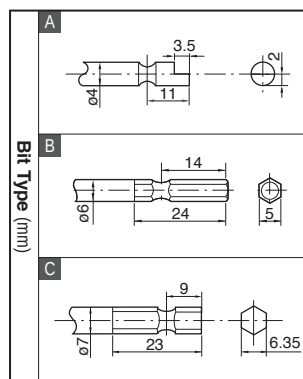

		Machine Screw(2.6 - 8.0 mm)					
Model	Lever Start	DLV30A06L-SPC	DLV30A12L-SPC	DLV30A20L-SPC	DLV45A06L-SPC	DLV45A12L-SPC	DLV70A06L-SPC
	Push to Start	DLV30A06P-SPC	DLV30A12P-SPC	DLV30A20P-SPC	DLV45A06P-SPC	DLV45A12P-SPC	DLV70A06P-SPC
Input Voltage		100 V AC, 50/60 Hz *1					
Torque Adjustment		Stepless					
Torque (Nm [lbf·in])		0.4 - 1.6 / 1.2 - 3.0 [3.5 - 14.2 / 10.6 - 26.6]			2.0 - 4.5 [17.7 - 39.8]		3.8 - 7.0 [33.6 - 62.0]
Free Speed (min ⁻¹)		650	1200	2000	650	1200	650
Power Consumption (W)		45					
Screw Size (mm)	Machine Screw	2.6 - 5.0			4.5 - 6.0		5.0 - 8.0
	Tapping Screw	2.5 - 4.0			4.0 - 5.0		4.5 - 6.0
Bit Type		B *2			C		
Mass (g [lbs])		700 [1.54]			870 [1.92] with pistol grip		
Cord Length (m)		3 (with connector)					
Bit Grounding		Equipped as standard					

*1: Please contact us for other voltage availabilities. *2: Please contact us for 6.35 mm bit type.

Optional Accessories



Torque Adjustment Ring Cover

DLW5200: DLV7100/7200/8100/8200-SPC
DLW5300: DLV7000/8000-SPC

- This minimizes tampering or accidental turning of the torque adjustment ring once the torque is set.
- Flanged coupling DLW9011 can not be mounted on SPC type



Pistol Grip

DLW2300: DLV7100/7200/
8100/8200/30/45/70-SPC

- Suitable for horizontal operation




TD04061 SPC cord for

commercial power source (optional)

- Dedicated screwdrivers can be directly plugged in commercial power source.

A Series (For Automation) Model DLV30A/45A/70A Non-CE


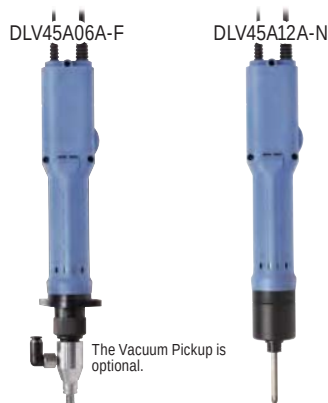


Features

For automatic assembly robot

- Three series of screwdrivers can be mounted on the XY robot
- Automatic screw tightening achieves a labor-saving or unattended process
- Long-life brushless motors are incorporated in the electric screwdrivers
- Standard coupling, flange coupling, and left-hand thread coupling are available for installation
- The electric screwdriver generates the torque-up signal
- The screwdrivers can be connected to a sequencer to control starting, forward rotation, and reverse rotation
- An electrical noise preventive measure is employed to avoid malfunction. Each input/output signal is insulated from a screwdriver's internal circuit by a photocoupler.

Specifications

Specifications			Low Speed		Standard		High Speed		Low Speed		Standard		Low Speed	
Electric Screwdriver	Model:	Bit	Standard coupling	DLV30A06A-N(AA) : J	DLV30A12A-N(AA) : J	DLV30A20A-N(AA) : J	DLV45A06A-N(AA) : K	DLV45A12A-N(AA) : K	DLV70A06A-N(AA) : K					
			Coupling with flange	DLV30A06A-F(AA) : J	DLV30A12A-F(AA) : J	DLV30A20A-F(AA) : J	DLV45A06A-F(AA) : K	DLV45A12A-F(AA) : K	DLV70A06A-F(AA) : K					
			Coupling with M41 screw	DLV30A06A-M(AA) : J	DLV30A12A-M(AA) : J	DLV30A20A-M(AA) : J	DLV45A06A-M(AA) : K	DLV45A12A-M(AA) : K	DLV70A06A-M(AA) : K					
	Input Voltage		100 V AC, 50/60 Hz											
	Torque (Nm [lbf-in])	Low Torque Spring*1	0.4 - 1.6 [3.5 - 14.2]						2.0 - 4.5 [17.7 - 39.8]		3.8 - 7.0 [33.6 - 62.0]			
		High Torque Spring*2	1.2 - 3.0 [10.6 - 26.6]											
	Free Speed	(min ⁻¹)	650	1200	2000	650	1200	650						
	Screw	Machine Screw	2.6 - 5.0						4.5 - 6.0		5.0 - 8.0			
	Size	Tapping Screw	2.5 - 4.0						4.0 - 5.0		4.5 - 6.0			
	Mass (g [lbs])	Standard coupling	700 [1.54]						780 [1.72]					
Coupling with flange		760 [1.68]						840 [1.85]						
Coupling with M41 screw		740 [1.63]						820 [1.81]						
Power Consumption (W)		45												
Starting Method		External input signal												
Input signal		Start signal / Forward signal / Reverse signal (5 - 24 V DC)												
Output signal		Torque-up signal (Voltage under 30 V DC and current 20 mA)												
Standard Accessories		• Bit NK31 (No.2 × 6 × 70): 1 pc. • Low torque spring: 1 pc.						• Bit NK35 (No.2 × 7 × 75): 1 pc.						
Bit Type (mm)	J	*3		K	*1: Standard Accessory *2: Installed *3: DLV30A is available upon request for use with 6.35 mm hex. shank bits.									
														

Optional Accessories




Vacuum Pickup	Part No.
DLP7400(M3/M4 screws)	TD07285
DLP7400 for high torque (M5/M6 screws)	TD07286

* Please see page 39 for details.



Vacuum Pump
DLP2530/2570

Torque Diagrams (for reference)



Screwdriver Cable Breakdown List

Power/Input Signal Cable


Color	Details
Green	Power input
Yellow	Power input
Blue	Bit earth
White	Input signal common (Vcc)
Black	Start signal input
Orange	Forward signal input
Gray	Reverse signal input

Power input voltage: 100 V AC

Output Signal Cable

Color	Details
White	Torque-up signal output
Black	Ground


Power Input/Output Signal Schematic Diagram

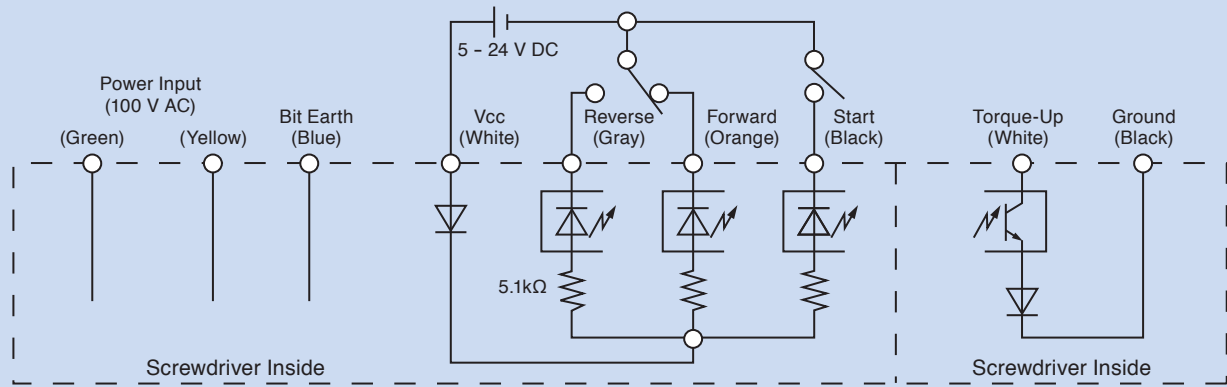

Caution


- Each input/output signal is insulated from a screwdriver's internal circuit.
- Input signal rated range: Use in the range of voltage between 5 – 24 V DC (current 0.5 – 5 mA DC)
- Torque-up signal output maximum rating: Use in the range of voltage under 30 V DC and current 20 mA DC.

Operation Timing Chart

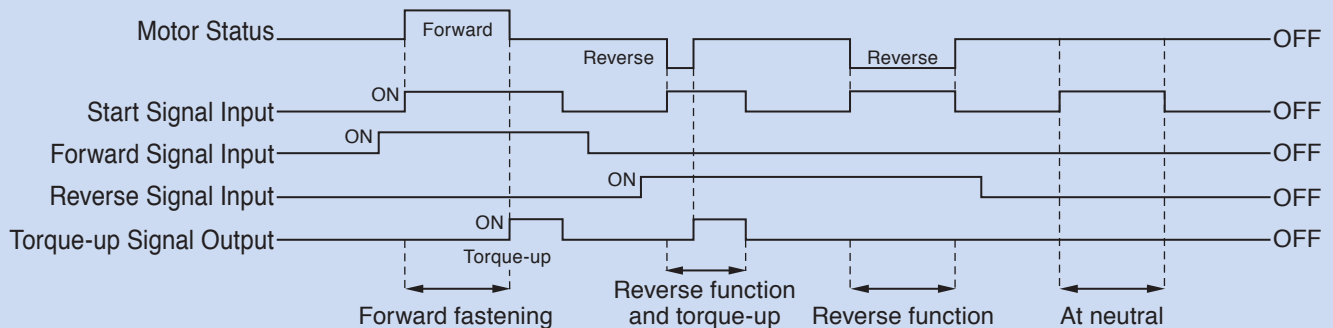


External Dimensions


•DLV30A□ A-N

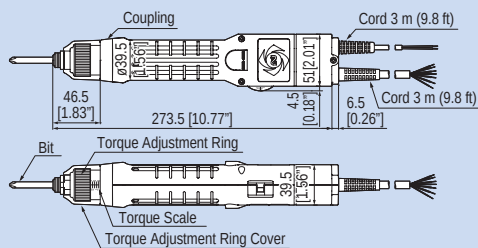


•DLV30A□ A-F

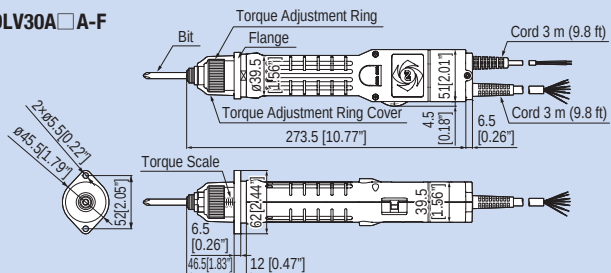


•DLV30A□ A-M

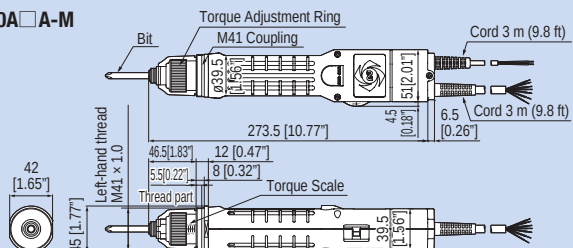


•DLP7400

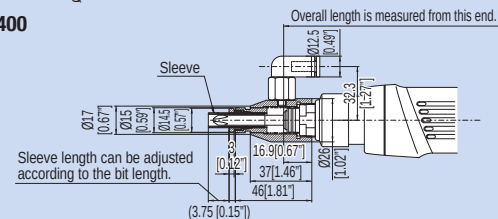


•DLV45A□ A-N/ 70A06A-N

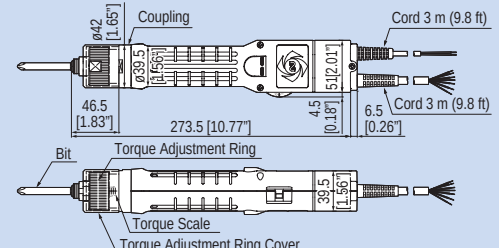

•DLV45A□ A-F/ 70A06A-F

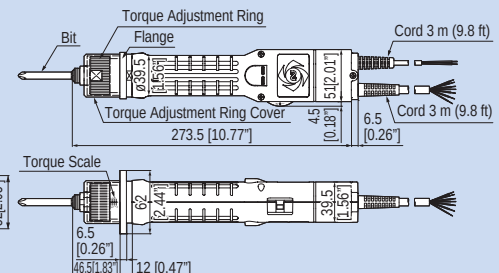

•DLV45A□ A-M/ 70A-M

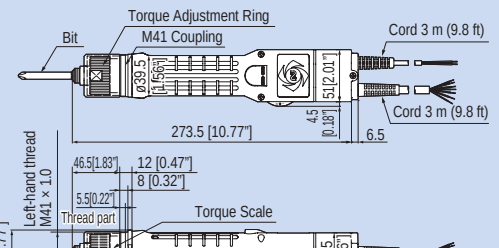

unit: mm [inch]

DLV3100/3300 Series (For Automation) Non-CE

DLV3100 series DLV3300 series



Features

A Labor-Saving "delvo" for Automatic Assembly Robot

- Vibration-proof and shock-proof for long continuous screw tightening
- Torque-up signal output
- High repetitive torque accuracy

1: Models DLV3121 / 3131 / 3141 / 3151 have no bit-holding function. Please order the following models with bit holding function if required, but they require 100 V AC power source and are made to order products.

- DLV3128-EJN • DLV3138-EJN
- DLV3148-EJN • DLV3158-EJN

NOTE: The bit mounting is made in a specific way.

Specifications


Specifications		For Precision Screws		For Machine Screws				
Electric Screwdriver	Model	DLV3321-CMN	DLV3331-CMN	DLV3121-EJN*1	DLV3131-EJN*1	DLV3141-EJN*1	DLV3151-EJN*1	
	Input Voltage	36 V DC (supplied from controller)			100 V AC, 50/60 Hz			
	Torque Adjustment	Stepless						
	Torque (Nm [lbf-in])	0.05 - 0.5 [0.4 - 4.4]	0.3 - 1.2 [2.7 - 10.6]	0.25 - 0.7 [2.2 - 6.2]	0.5 - 1.5 [4.4 - 13.3]	1.2 - 3.0 [10.6 - 26.6]	2.0 - 4.5 [17.7 - 39.8]	
	Free Speed (min ⁻¹)	900	600	900		600	450	
	Power Consumption (W)	Approx. 35					Approx. 45	
	Screw Size (mm)	Machine Screw	1.0 - 3.0	2.0 - 3.5	2.3 - 2.6	2.6 - 3.5	3.5 - 5.0	4.5 - 6.0
		Tapping Screw	1.2 - 2.6	2.0 - 3.0	2.3 - 3.0	2.5 - 3.5	3.0 - 4.0	4.0 - 5.0
	Mass (g [lbs])	400 [0.88]			900 [1.98]			
Standard Accessories				• Connection Cord (2 m): 1 pc. • Spare Carbon Brush: 2 pc.				

* The 2 m cord exclusively for DLV3321/3331 comes with DLC3310 as a standard accessory.


Bit Type (mm)	For CMN		For EJN	

Model	DLC3310
Input Voltage	24 V AC, 50/60 Hz
Output Voltage	36 V DC
Mass (g [lbs])	360 [0.79]

Installation Example

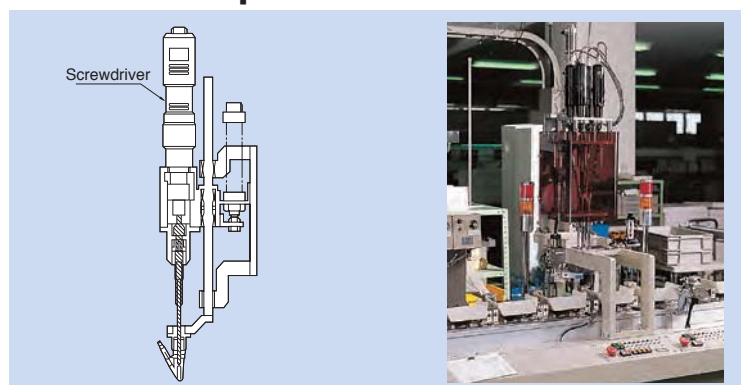

External Dimensions

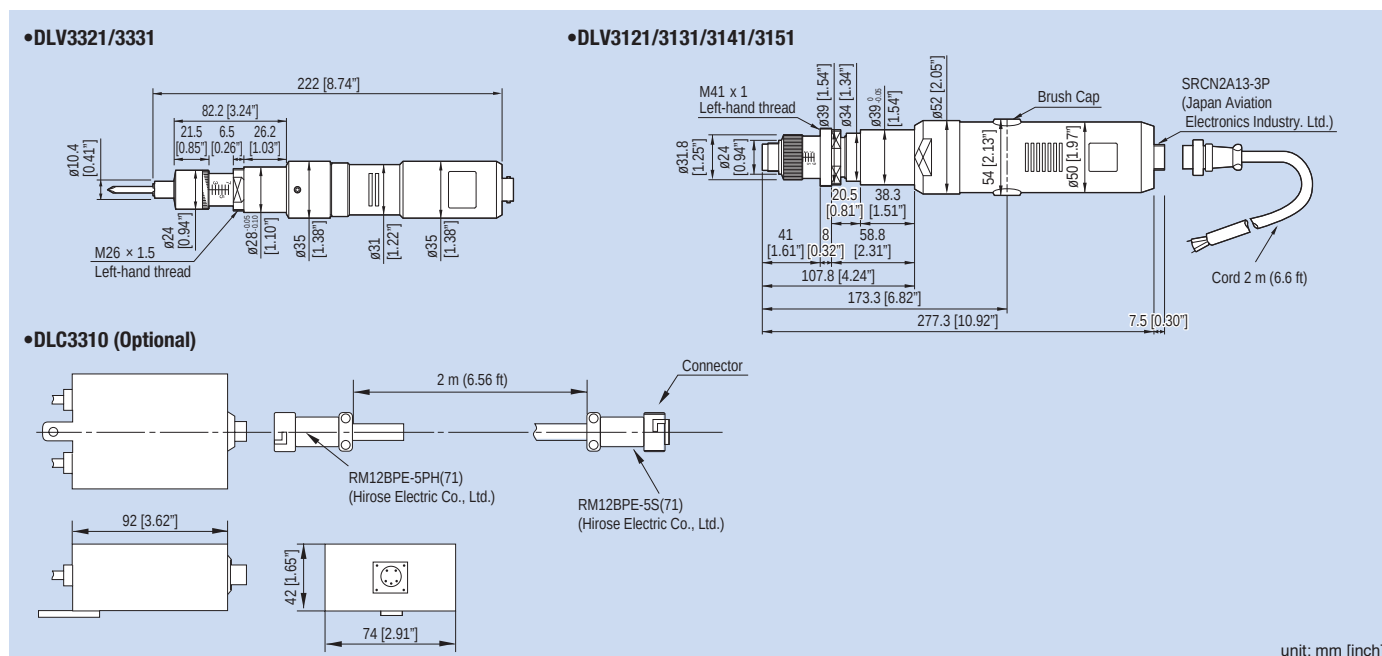

DLT1673A



DLT1973A



Features

Maintaining high assembly quality with ease

- Measured data is stored even after the power is turned off, preventing any data loss
- Energy saving type with AUTO POWER OFF function (Power is automatically turned off when left unused for 10 minutes)
- A program designed for uploading the data stored in the "delvo" torque checkers to a computer is available to download free from the NITTO KOHKI website:

www.nitto-kohki.co.jp/e/prd/e-dl/delvo.html



Click

Specifications

Model	DLT1173A	DLT1673A	DLT1973A
Measurement Range (Nm[lbf-in])	0.015 - 1.500 [0.13 - 13.3]	0.15 - 10.00 [13.5 - 88.5]	4.00 - 12.00 [35.4 - 106.2]
Calibration Precision	Within $\pm 0.5\%$ (Full Scale) For 0.2 Nm [2 lbf-in] or less ± 1 digit	Within $\pm 0.5\%$ (Full Scale) For 2 Nm [20 lbf-in] or less ± 1 digit	Within $\pm 0.5\%$ (Full Scale)
Display	4-digit digital display (Single-line)	Data sampling: 1000 times/sec.	Display rate: 12 times/sec.
Measuring Unit	kgf • cm, Nm, lbf • in (selectable)		
Data Memory	800 pieces of data		
Measuring Direction	CW and CCW		
Measuring Mode	3 modes: PD-TR-PP		
Auto Power Off	Power off if left untouched for 10 minutes		
External Output	As per USB output Mitsutoyo Digimatic		
Analog Output	Approx. 1.5 V max.	Approx. 1.0 V max.	Approx. 1.1 V max.
	No zero offset; identical waveforms produced in PP, PD, and TR modes		
Continuous Operation Time	20 hours		
External Dimensions (mm)	W160 × D110 × H47		W200 × D112 × H48.5
(inch)	[W6.3" × D4.33" × H1.85"]		[W7.9" × D4.41" × H1.89"]
Mass (g [lbs])	1100 [2.43]		1400 [3.09]
Rechargeable Battery	Nickel metal hydride battery		
Charger Type	DLE1833A		
Input Voltage for Charger	100 - 240 V AC, 50/60 Hz		
Charging Time	4 hours		
Standard Accessories	• Screw Joint (DLW4430)	• Bit Joint (DLW4360) • Spring for Joint (DLW4660)	• Soft Joint (DLW4000)

Plug Shape	Asia	Europe

Selection of Torque Checker

DLT1173A	DLT1673A	DLT1973A
DLV3300*2	DLV7100/7200/	DLV45A/70A
DLV5700	8100/8200	DLV45S/70S
DLV5800	DLV7500/8500	DLV45A/70A
DLV7300	DLV3100*3	(automation)
DLV7000/8000	DLV30A/45A	
DLV7400A	DLV30S/45S	
DLV02/12	DLV16	
DLV04C/10C	DLV7104/8104/8204	
	DLV30A/45A	
	(automation)	

*2: A reversible screwdriver is required to loosen the measuring joint.

*3: A reversible screwdriver is required to loosen the measuring joint. Screw joint is required.

Optional Accessories

	Model	Part No.	Shape	Torque Range	DLT1173A	DLT1673A	DLT1973A
Bit Joint	DLW4330	TD03305	OD 4 mm [0.16"] type	0.015 - 0.25 Nm [0.13 - 2.2 lbf-in]	○	—	—
	DLW4340	TD03306	OD 4 mm [0.16"] type	0.15 - 1.5 Nm [1.3 - 13.3 lbf-in]	○	○	—
	DLW4350	TD03307	Hex 5 [0.2"] and Hex 6.35 [1/4"] types	0.15 - 1.5 Nm [1.3 - 13.3 lbf-in]	○	○	—
	DLW4360	TD03308	Hex 5 [0.2"] and Hex 6.35 [1/4"] types	0.15 - 6.5 Nm [1.3 - 57.5 lbf-in]	—	◎	—
	DLW4430	TD03309	screw type (Bit size No.2)	0.15 - 1.5 Nm [1.3 - 13.3 lbf-in]	◎	—	—
Screw Joint	DLW4530*1	TD03310	screw type (Bit size No.2)	0.15 - 5 Nm [1.3 - 44.3 lbf-in]	—	○	—
	DLW4000	TD04123	Hex 13 [0.51"] type	4.0 - 12.0 Nm [35.4 - 106.2 lbf-in]	—	○	◎
Hard Joint	DLW4040	TD04124	(Hex. head bolt)		—	—	○
Spring	DLW4660	TV03826	Spring for DLW4340, 4350, 4430	-	○	◎	—

*1 DLW4530 must be used at 5 Nm [44.3 lbf-in] or less.

◎: Standard accessories ○: Available as option —: Unsupported

Bit Joint



Screw Joint



Soft Joint



Hard Joint



Spring




External Dimensions

• DLT1173A/1673A	• DLT1973A

Unit: mm [inch]

■ For DLV7400A, 5700, 5800, 7300, 7000, 8000, 3300 series




OD 4 mm Shank

Unit: mm

Model	Part No.	Size			Dimensions
		No. x	d	x L	
Phillips	NK4D	00	2	44	
				64	
				44	
				44	
		0	1.8	64	
				44	
				64	
				44	
		1	2.5	44	
				64	
				64	
				44	
Plain Slot	NK4DM	2	0.3	44	
				44	
				44	
				44	
		3	0.4	44	
				44	
				44	
				44	
		4	0.5	44	
				44	
				44	
				44	
Hexagon Head	NK4DX	2	1.5	44	
				44	
				44	
				44	
		3	2	44	
				44	
				44	
				44	
		4	2.5	44	
				44	
				44	
				44	
Hex Socket	NK4DB	4	6	44	
				44	
				44	
				44	
		5	7	44	
				44	
				44	
				44	
		6	8	44	
				44	
				44	
				44	

■ For DLV7100, 7200, 8100, 8200, 3100, A(DLV30A) series




OD 5 mm Hex. Shank

Unit: mm

Model		Part No.	Size			Dimensions	
			No. x	d	x L		
Phillips	NK31	TD20193	1	4	70		
		TD20194			100		
		TD20196			70		
		TD20197			100		
		TD20200	2	5	70		
		TD20201			100		
		TD20210			70		
		TD20211			100		
		TD20214	6	70	100		
TD20215							
Model	Part No.	No. x L			Dimensions		
Phillips	NK16	TD20224	1	70			
		TD20225				100	
		TD20232				70	
		TD20233	2	100			
		TD20235				150	
Model	Part No.	H x d x L			Dimensions		
Hexagon Head	NK31X	TD20254	2	4	70		
		Part No.	H x L				
		TD20256	2.5	70			
		TD20258	3				
		TD20260	4				
		TD20262	5				
Model	Part No.	H x D x d x L			Dimensions		
Hex Socket	NK31B	TD20272	5.5	9	4	70	
		TD20274	6	10	4.5	70	
		TD20276	7	11	5.5	70	
		TD20277				100	
		TD20278				70	
		TD20279	8	13	6	100	
		TD20282				70	
		TD20283	10	16	8	100	



■ For DLV7500, 8500, 7100, 7200, 8100, 8200,
02, 12, 16, A(DLV30A/45A/70A) series



OD 6.35 mm Hex. Shank












Unit: mm

Model		Part No.	Size			Dimensions			
			No. x	d	x L				
Phillips	NK35	TD20306	1	4	75				
		TD20307			100				
		TD20308			50				
		TD20309			75				
		TD20310			100				
		TD20311			120				
		TD20312			150				
		TD20313			200				
		TD20319	2	7	50				
		TD20320			75				
		TD20321			100				
		TD20322			120				
		TD20323			150				
		TD20324			200				
		TD20327			50				
		TD20328			75				
		TD20329	3	7	100				
		TD20330			120				
		TD20331			150				
		TD20332			200				
Model	Part No.	No. x d x L			Dimensions				
Phillips	NK36	TD20335			0	3.8		50	
		TD20336			1				
		TD20337	2	4.5					
		TD20338							
Model	Part No.	No. x L			Dimensions				
Phillips	NK15	TD20354	1	50					
		TD20355		75					
		TD20356		100					
		TD20357		120					
		TD20358		150					
		TD20359		200					
		TD20362	2	50					
		TD20363		75					
		TD20364		100					
		TD20366		150					
		TD20367		200					
		TD20371	3	75					
		TD20372		100					
		TD20374		150					
		TD20375		200					
Model	Part No.	W x T x L			Dimensions				
Plain Slot	NK35M	TD20378	7	0.9	50				
		TD20379		75					
		TD20380		100					
Model	Part No.	H x d x L			Dimensions				
Hexagon Head	NK35X	TD20382	1.27	3	70				
		TD20385	1.5						
		TD20388	2						
		Part No.	H x L						
		TD20391	2.5						
		TD20394	3						
		TD20397	4						
		TD20400	5						
		TD20404	6						
Model	Part No.	H x D x d x L			Dimensions				
Hex Socket	NK35BN	TD20442	10	16	8	75			
		TD20443				100			
		TD20457	13	19	10	75			
		TD20458				100			

If Bits other than the above are required,
please contact Nitto Kohki or our distributors.

Vacuum Pickups and Sleeves

Screwdriver series			Vacuum Pickup			Sleeve (Standard accessory)					
			Type	Model	Part No.	Model					
DLV7000/DLV8000/DLV3300			Type A	DLP6500	TD00343	DLS2124/DLS2127/DLS2130		1 piece each			
DLV7400A/DLV5700/DLV5800			Type B	DLP5300	TD04342	DLS2120/DLS2124					
DLV7313				DLP7100	TD00345	DLS2122/DLS2124/DLS2127					
DLV7323/DLV7333		For Ø4 mm		DLP7200	TD00346	DLS2123/DLS2124/DLS2127					
		For HEX. 6.35 mm (1/4")		DLP7300	TD00347	DLS2135					
DLV7100/DLV7200/DLV8100/DLV8200			Type C	DLP7000	TD00344	DLS3223/DLS3225					
DLV7104/DLV8104/DLV8204				DLP7400	TD07285-0	DLS3223/DLS3225					
DLV30A	For HEX. 5 mm (M3, M4)	DLP7400							TD07286-0	DLS4220/DLS4221	
DLV30S											
A series	For HEX. 6.35 mm (1/4")		Type D	DLP6600/DLP6610	TD08748/TD08751	DLS2124/DLS2127/DLS2134					
S series	(M5, M6)	DLP6640/DLP6650			TD08804/TD08805	DLS4225/DLS4227					
C series	For Ø4 mm			Type D		DLP6640/DLP6650	TD08804/TD08805		DLS4225/DLS4227		
	For HEX. 6.35 mm (1/4")										

Type	Type A	Type B	Type C		Type D		
Vacuum Pickup							
Sleeve							

DLS2000 series For Ø4 mm

Model	Part No.	Sleeve		øD		Bit (No. × d × L) (+)
		mm	inch			
DLS2120	TD00348	2	0.08	3.5	0.14	No. 0 × 1.8 × 44
DLS2121	TD00349	2.2	0.09			
DLS2122	TD00350	2.5	0.1			
DLS2123	TD00351	2.7	0.11	4.5	0.18	No. 0 × 2.5 × 44
DLS2124	TD00352	3.1	0.12			
DLS2125	TD00353	3.3	0.13			
DLS2126	TD00354	3.5	0.14			
DLS2127	TD00355	3.7	0.15	5.5	0.22	No. 1 × 3 × 44
DLS2128	TD00356	4	0.16			
DLS2129	TD00357	4.2	0.17			No. 1 × 4 × 44
DLS2130	TD00358	4.5	0.18			
DLS2131	TD00359	4.7	0.19	6.5	0.26	No. 2 × 4 × 44
DLS2132	TD00360	5.1	0.2			
DLS2133	TD00361	5.3	0.21			
DLS2134	TD00362	5.6	0.22			
DLS2135	TD00363	6.1	0.24	7	0.28	

DLS3000 series For HEX. 5 mm

Sleeve										Bit (No. × d × L) (+)
Model	Part No.	ød		øD		ø		L		
		mm	inch	mm	inch	mm	inch	mm	inch	
DLS3222	TD00364	5.6	0.22	7	0.28	5	0.2	34	1.34	No. 1 × 5 × 70
DLS3223	TD05024	6.1	0.24	9	0.35					No. 2 × 6 × 70
DLS3224	TD00365	6.4	0.25							
DLS3225	TD00366	7.1	0.28							
DLS3226	TD00367	4.6	0.18	7	0.28	18	0.71	65	2.56	No. 1 × 4 × 100
DLS3227	TD00368	5.1	0.2							No. 1 × 5 × 100
DLS3228	TD00369	5.6	0.22							No. 1 × 5 × 100
DLS3229	TD00370	6.1	0.24							No. 1 × 5 × 100
DLS3230	TD00371	6.4	0.25	9	0.35					No. 2 × 6 × 100
DLS3231	TD00372	7.1	0.28							

DLS4000 series For HEX. 6.35 mm (1/4")

Model	Part No.	Sleeve		øD		ø		L		Bit (No. × d × L) (+)
		mm	inch					mm	inch	
DLS4220	TD08001	9.1	0.36	11	0.43	5	0.2	6	0.24	No. 2 × 7 × 75
DLS4221	TD08002	10.6	0.42	12.5	0.49	5.5	0.22	7	0.28	
DLS4225	TD09344	4.6	0.18	7	0.28					No. 1 × 4 × 75
DLS4227	TD09345	5.6	0.22							

Accessories

Tool Balancer



Easy to adjust tension by using handle.

Model	TW-06R	TW-1R	RW-3	RW-5
Capacity (g [lbs])	200 - 600 [0.44 - 1.32]	500 - 1500 [1.1 - 3.31]	1000 - 3000 [2.2 - 6.61]	2500 - 5000 [5.51 - 11.02]
Stroke (m [inch])	1.5 [59"]		2 [78.7"]	
Mass (g [lbs])	300 [0.66]		700 [1.54]	900 [1.98]

Vacuum Pump DLP2500 series



Electric Screwdrivers can be used with Vacuum Pump and Vacuum Pickup. The sleeve of Vacuum Pickup sucks the screw and holds it on the bit, enabling the operator to pick it up with the tool itself, thus improving operational efficiency and operator's productivity.

Model	DLP2530	DLP2570
Features	Standard	With CE mark
Voltage	100 V AC, 50/60 Hz	230 V AC, 50/60 Hz
Power Consumption (W)	30(50 Hz), 26(60 Hz)	
Achievable Vacuum (kPa)	-21.3	
Flow Rate (at Outlet) (L/min)	24(50 Hz), 26(60 Hz)	
Screw Size (mm)	4 or less	
Mass (g [lbs])	3800 [8.38]	


Pistol Grip DLW2300/2300ESD

(for DLV7100, 7200, 8100, 8200, 7500, 8500, 30/45/70-IKE, S(DLV30S/45S/70S) series and A(DLV30A/45A/70A) series Electric Screwdrivers)



Easy-to-attach grip suitable for horizontal operation.

Shaker Box Made of Anti-electrostatic Resin

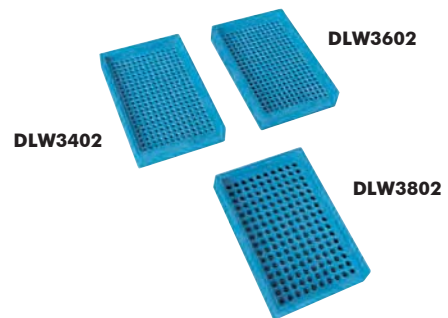

The screws will fall into the heads-up position for easier vacuum or magnetic pickup.

The anti-electrostatic resin greatly reduces static build-up and dust attached to the shaker box.

Model	DLW3402	DLW3602	DLW3802
Part No.	TD04110	TD04111	TD04112
Hole Pitch (mm [inch])	6 [0.24"]		
Hole Depth (mm [inch])	13.5 [0.53"]		
No. of Holes	273	273	160
Screw Size (mm)	1.7 - 2	2 - 2.6	3 - 4

Torque Adjustment Ring Cover



Fits over torque adjustment cover to minimize tampering or accidental turning once the torque is set.

Model	Part No.	Applicable Screwdriver
DLW5200	TD00331	DLV7100, 7200, 8100 and 8200 series
DLW5201*1	TD05639	DLV7100, 7200, 8100 series and DLV30A (Transformerless Type)
DLW5202	TD08486	DLV45S/70S and DLV45A/70A
DLW5203	TD09222	DLV30S and DLV30A (Low Voltage Type)
DLW5300	TD00332	DLV7301, 7000, 8000 series (for 4 mm bit)
DLW5400	TD01883	DLV7301 series (for 6.35 mm bit)
DLW5500	TD00333	DLV7303 series (for 4 mm & 6.35 mm bit)
DLW5600	TD00334	DLV7500, 8500 series
DLW5700	TD02875	DLV5700, 5800, 7400A series
-	TV07315	DLV02/12/16SL-BKE series
-	TV06787	DLV02/12/16SL-CKE series

*1: As this is a clear plastic cover, torque scale can be seen even after mounted on the screwdriver.

Flanged Coupling DLW9011


(for DLV7100, 7200, 8100, and 8200 series Electric Screwdrivers)

*Can not be mounted on SPC type



Provides a flange which enables the operator to apply axial pressure through the heel of the hand.


Torque Reaction Arm

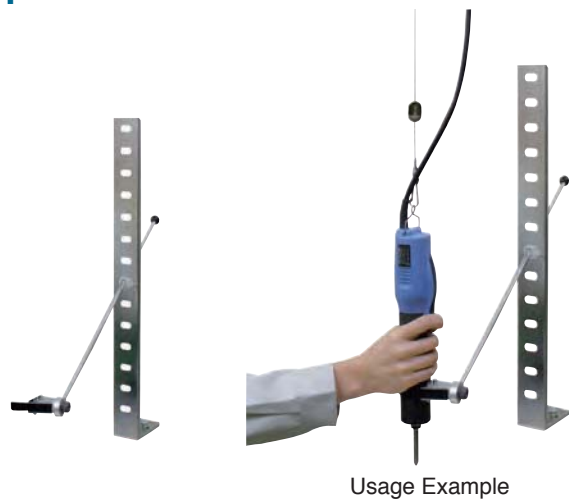

For enhanced productivity and prevention of operator's repetitive motion injury, a torque reaction arm should be used all together.

Part No.	Decription	Applicable Screwdriver
TD06180	Torque Reaction Arm	A series(DLV30A/45A/70A) S series(DLV30S/45S/70S)

Optional Cord

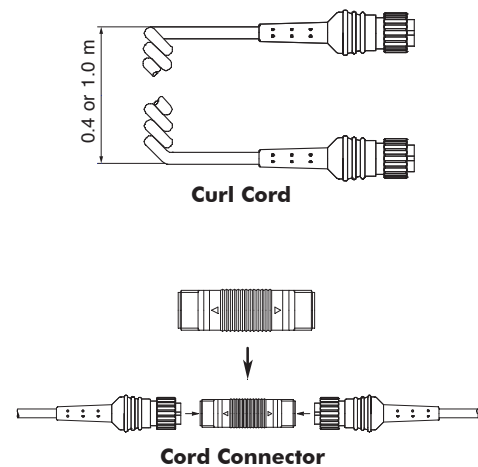

Please inquire of the distributor for the price and minimum quantity on each optional cord.

Part No.	Optional Cord	Applied Models	Length (m)
TD02826	5P to 6P Exchange Cord*1	DLV7300 series	0.1
TD02548	Extension Cord For 5P		3.0
TD03159	Extension Cord For 6P		2.0
TD01882	Curl Cord	DLV7500/8500 series	0.4
TD02820	Curl Cord		1.0
TD02438	Cord Connector DLW9100		

*1: "5P to 6P Exchange Cord" is used to connect "5-prong Screwdriver" to "6-prong Controller".

SAFETY GUIDE

Be sure to read and understand the following safety notations and all safety precautions.



WARNING:

Indicates a potentially hazardous situation which, if failure to comply with the instructions given, could result in serious injury or death.



CAUTION:

Indicates a potentially hazardous situation which, if failure to comply with the instructions given, could result in injury or material damage.

Safety Precautions

- Be sure to follow the safety precautions to keep accidents such as fires, electroshock, and injuries from occurring.
- Before using your tool, please read this manual carefully so that you may use it properly to get the most out of it.
- Keep the manual handy – so you can use it whenever necessary.



WARNING

- Keep work area clean. Cluttered work areas and benches invite accidents and injuries.
- Consider proper working environments for each tool carefully. Do not expose electric tools to extreme amounts of moisture or direct contact with water or rain. Keep area well lit at all times to prevent hidden dangers and never operate the equipment near flammable liquids or in gaseous or explosive atmospheres.
- Prevent operators from electric shock. When using electric tools, prevent body contact with grounded surfaces (e.g. pipes and outer frames of radiators, microwave ovens, and refrigerators, etc.).
- Keep all electric tools and power cords away from children and all unauthorized personnel. Also all visitors should be kept away from work area.
- Properly store tools and accessories while not in use. They should be kept in a dry, locked-up location out of reach of children or unauthorized personnel.
- Do not force tool. It will do the job better and more safely at the rate for which it was intended.
- Use the right electric power tool that can complete the job within its specifications. Do not attempt to adapt improper attachments or accessories to complete a job. Do not use the tool for other than what they were designed for.
- Dress properly. Do not wear loose clothing and/or accessories. (gloves, necklace etc.) They can be caught in moving parts. Non-skid footwear is recommended in outdoor operation. Wear protecting hair covering to contain long hair.
- Always wear safety glasses during operation. Wear respiratory protection when working in an environment where dust particles are generated during operation.
- Do not abuse cord. Never carry tool by cord or yank it to disconnect from receptacle. Keep cord from heat, oil, and sharp edges.
- Use clamps or a vise to secure the work piece tightly and eliminate vibration. Never hold the work piece with your hands, keep both hands on the electric tool for increased productivity.
- Do not overreach. Keep proper footing and balance at all times.
- Maintain tools with care. For safe and efficient work, use the proper bit and check it regularly. Do not use the bit with a worn out or deformed tip. When oiling and replacing parts, follow the instructions given by the instruction manual. Inspect tool cords periodically and if damaged, have them replaced by an authorized service facility. Keep handles dry, clean, and free from oil and grease.
- Disconnect a tool or a controller when not in use, when repairing, or when changing accessories and bits, etc.
- Remove adjusting keys and wrenches. Form habit of checking to see that keys and adjusting wrenches are removed from tools before turning it on.
- Always avoid an unexpected start by having all power switches in the off position prior to attaching to a power supply. Never carry tools with your finger on the on/off switch when the power is attached. Never plug the cord into a receptacle while your finger is on the on/off switch.
- When the tool is used outdoors, use an electric extension cord or cable suitable for outdoor use.
- Stay alert. Watch what you are doing. When using electric tools, take good care of tool handling, working manner, and surrounding conditions. Use common sense. Do not operate tool when you are tired.
- Check damaged parts. Before further use of the tool, an accessory or other part that is damaged should be carefully checked to determine that it will operate properly and perform its intended functions. Check for alignment of moving parts, binding of moving parts, breakage of parts, mounting, and any other conditions that may affect its operation. When repairing or replacing parts, follow the directions of the instruction manual. The part that is damaged should be properly repaired or replaced by an authorized service facility unless otherwise indicated elsewhere in this operation manual. Have defective switches replaced by an authorized service facility. Do not use the tool if the switch cannot be turned on and off.
- Use only recommended accessories and attachments as per tool operator manual and “delvo” general catalog. Use of improper accessories and attachments may result in an accident or serious injury.
- Any repairs on the tool should be performed only by an authorized service facility. Do not modify the tool that is complying with the safety standard. If the repairman who has poor knowledge and skill repairs the tool, the tool may not give a good performance and result in an increased risk of injury to the user.
- The power source must be limited to the individual tools specifications as stated on the nameplate or instruction manual. If used at a higher or lower voltage than indicated, it may cause failure and result in an increased risk of injury to the user.
- Before work operation carefully check if there are underground installations such as conduit, water pipe, and gas pipe, etc. If a tool should touch them, it might cause electric shock, electric leak, or gas leak.
- Hold the tool body firmly so as not to be swung by it when using. If not, this may cause injury.
- Do not bring hand or face close to moving parts such as bit etc. when using. This may cause injury.
- When you have dropped the tool by mistake, carefully check the tool if there is breakage, cracks or deformation. This may cause injury.



CAUTION

- Install bits or accessories securely in accordance with the operation manual. Insufficient installation may cause injury.
- Whenever setting the torque, unplug the cable of the tools. Adjusting the torque setting during rotation may cause injury.
- When operating a tool at high places, check that there is no person under the places. Do not stumble over the cord nor drop the material or tool body. This may cause injury.
- Never leave a tool running unattended on the working bench or floor. Always turn the power switch or lever to the off position and disconnect from the power source when not in use.
- Do not overload to the extent that the motor locks or the clutch malfunctions. This may cause smoke, fire, failure or injury.
- If the tool is overheating or functioning abnormally, stop using the screwdriver immediately and inspect it to see whether any repairs are necessary. Otherwise this may cause failure or injury.
- The electric screwdriver may overheat depending on the type of screw, type of screw-tightened material, or frequency of use. To avoid overheating, stop operating the screwdriver for a time or use several drivers in alternation. Overheating may reduce the life of the product or cause failure or injury.
- The fastening torque may vary depending on how the product is operated or held, the type of screw, and the fastening conditions. Use a torque wrench or similar tool to check that the fastening torque is appropriate.

delvo

Electric Screwdrivers

The logo for delvo is registered trademark or a trademark of Nitto Kohki Co., Ltd. in Japan, the United States and/or certain other countries.




ISO 9001
JQA-2025
ISO 14001
JQA-EM4057
H.Q./R&D Lab



NK BIT

NK Bits exclusively for air and electric screwdrivers !

Fit in most screwdrivers with wide variety of bit types & sizes produced under tight quality control.

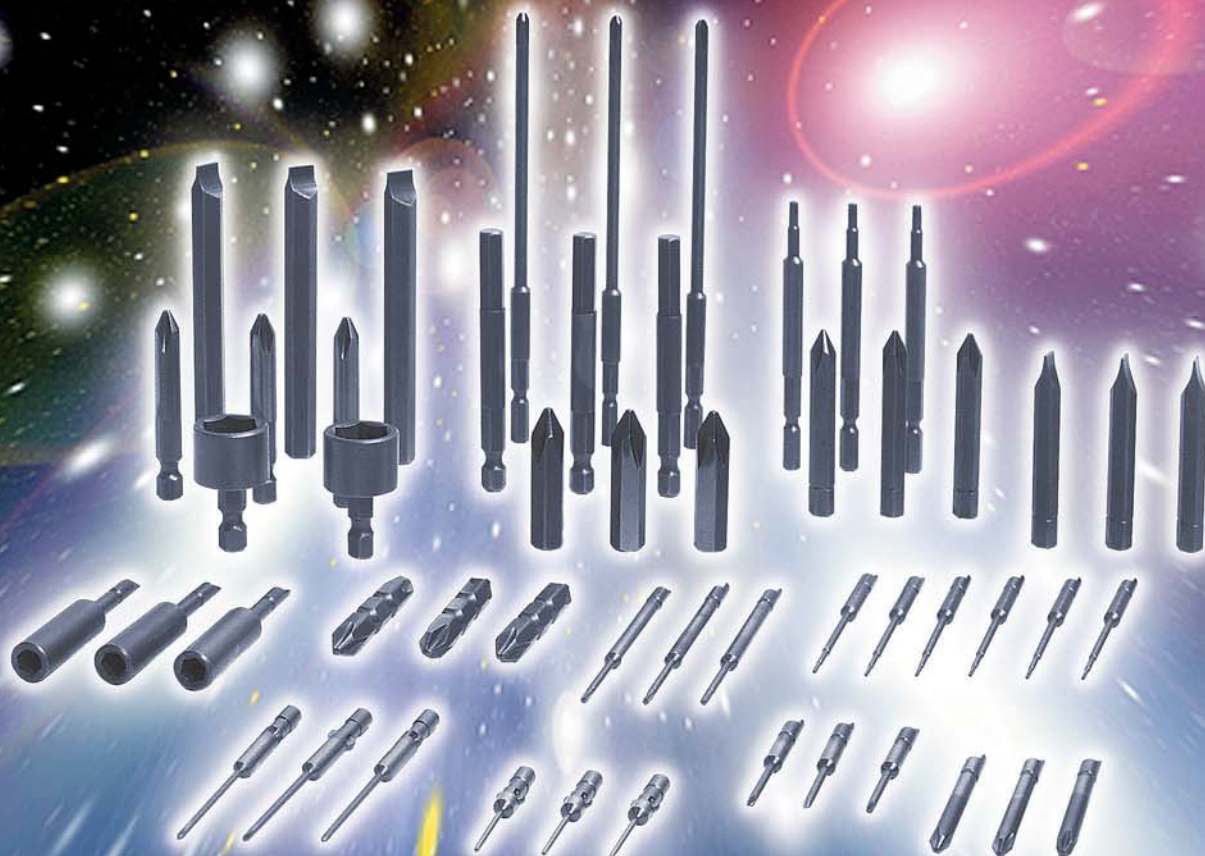

NK BIT

The "NK Bits" best fit for pneumatic and electric screwdrivers!

Bit is the key element connecting the screwdriver and the screw itself requiring high precision shank dimensions, high impact and wearing durability suitable to each fastening condition, and best compatibility with the screw.

"NK Bits" adopt special alloy exclusively refined for screw bits and are finished with high quality by fulfilling all essential requirements for bits applying best reserved machining and heat treatment technologies.

Further, you can select the right bit for your specific fastening requirements from the wide range of "NK Bits".

Features

High precision

- Consistent production from the raw material to the finished product realizes the uniform quality.
- Designed for the best compatibility with tools and screws.
- Minimized oscillation of bit axis

Long life

- Special alloy exclusive for screw bits is adopted.
- Long life is realized by strict hardness control.

Low price

- Low price is realized by consistent production.

About the hardness

Your appropriate selection of the bit hardness for each application will ensure better durability.

"NK Bits" Hardness Standard

Hardness Grade	Applicable to (as guideline)	Standard Model Examples
H (Hardest)	Screw size 1 ~ 3mm	NK4D, NK4DH, NK5H
G (Standard)	Screw size 3.5 ~ 5mm	NK31, NK35, NK39, NK15, NK16, NK13, NK12
E (Medium hard)	Screw size 6mm	
F (Least hard)	Bolts, Nuts	NK4DB, NK4DHB, NK31B, NK35B, NK39B

★ Hardness standard is set as shown above considering the load factors by the screw size.

★ If excess wear is seen, ask us for X grade, the extreme hardness. If frequent break is seen, ask us for the hardness lower than the listed. Consult your supplier.

In order to correspond to the best fastening conditions, we will comply to the following special orders.

- Bits with special hardness
- Bits with indicated length
- Bits with the indicated surface treatment
- Optional accessory to magnetize bits

★ For special made to order, the price varies depending on the production quantity. Always suggest us the quantity.



How to select the bit

(basic guideline)

Bits are variously classified by the type of tools to be mounted on or screws they are used for. With wide product range, "NK Bits" comply with almost all the fastening operations.


Bits are classified into the following models by shank shape and screw type of the tool used.

Make selection in the following order ;

Type of shank shape ► Screw type ► Bit model ► Size

SHANK SHAPE

POINT TYPE

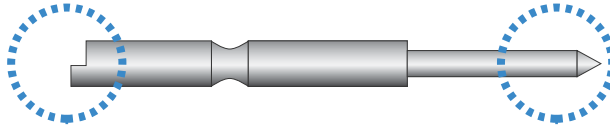

SHANK SHAPE	POINT TYPE	MODEL	SEE PAGE
 Ø4mm SHANK DRIVE	CROSS POINT	NK4D	P3
	PLAIN SLOT	NK4DM	P3
	HEXAGON HEAD	NK4DX	P3
	HEX SOCKET	NK4DB	P3
	HEXLOBU	NK4DT, NK4DST	P3
 Ø4mm SHANK DRIVE	CROSS POINT	NK4DH	P4
	PLAIN SLOT	NK4DHM	P4
	HEXAGON HEAD	NK4DHX	P4
	HEX SOCKET	NK4DHB	P4
	HEXLOBU	NK4DHT, NK4DHST	P4
 Ø5mm HEX SHANK DRIVE	CROSS POINT	NK31	P5
		NK16	P5
	PLAIN SLOT	NK31M	P5
	HEXAGON HEAD	NK31X	P6
	HEX SOCKET	NK31B	P6
 Ø6.35mm HEX SHANK DRIVE	CROSS POINT	NK35, NK36	P7
		NK15	P7
	PLAIN SLOT	NK35M	P7
	HEXAGON HEAD	NK35X	P7
	HEX SOCKET	NK35BN, NK35B, NK35MB	P8
 Ø6.35mm HEX SHANK DRIVE	HEXLOBU	NK35T	P8
	CROSS POINT	NK39	P9
		NK12	P9
	PLAIN SLOT	NK39M	P9
	HEX SOCKET	NK39BN, NK39MB	P9
 Ø5mm SHANK DRIVE	HEXLOBU	NK39T	P9
	CROSS POINT	NK5H	P10
 Ø8mm HEX SHANK DRIVE	HEXLOBU	NK5HT	P10
	CROSS POINT	NK13	P11
 Ø8mm HEX SHANK DRIVE	HEXLOBU	NK13T	P11
	CROSS POINT	NK51	P11
 Ø6.35mm HEX SHANK DRIVE	PLAIN SLOT	NK51M	P11
	CROSS POINT	NK52	P11
 Ø3mm SHANK DRIVE	PLAIN SLOT	NK52M	P11
	CROSS POINT	NK10	P11
 Ø3mm SHANK DRIVE	PLAIN SLOT	NK10M	P11


SCREW SIZE	CROSS POINT	PLAIN SLOT	HEXAGON HEAD	HEX SOCKET	HEXLOBU
1	No.00	0.32	—	—	T1
1.2	No.00	0.32	—	—	T2
1.4	No.0	0.32	—	—	T3
1.6	No.0	0.4	1.5	3.2	T4
2	No.0	0.6	1.5	4	T5 & T6
2.5	No.1	0.6	2	5	T7
3	No.1	0.8	2.5	5.5	T8
4	No.2	1	3	7	T10
5	No.2	1.2	4	8	T20
6	No.3	1.2	5	10	T25
8	No.4	1.6	6	13	T30

* The above list shows the relation of standard screw sizes and corresponding screwdriver bit shapes. Please check with your driver bit.

Example

TD20001 **NK4D-00** **x 1.2 x 44**

Part Number Model Size




ø4mm SHANK DRIVE

☆FOR : DELVO (NITTO KOHKI)

CROSS POINT



NK4D




No. x d x L	MODEL	PARTS No.
00 x 1.2 x 44	NK4D	TD20001
00 x 1.2 x 64	NK4D	TD20002
00 x 1.4 x 44	NK4D	TD20003
00 x 1.4 x 64	NK4D	TD20004
00 x 1.5 x 44	NK4D	TD20005
00 x 1.5 x 64	NK4D	TD20006
00 x 1.7 x 44	NK4D	TD20007
00 x 1.7 x 64	NK4D	TD20008
00 x 2 x 44	NK4D	TD20009
00 x 2 x 64	NK4D	TD20010
00 x 2.5 x 44	NK4D	TD20011
00 x 2.5 x 64	NK4D	TD20012
00 x 4 x 44	NK4D	TD20013
00 x 4 x 64	NK4D	TD20014
0 x 1.4 x 44	NK4D	TD20015
0 x 1.4 x 64	NK4D	TD20016
0 x 1.5 x 44	NK4D	TD20017
0 x 1.5 x 64	NK4D	TD20018
0 x 1.7 x 44	NK4D	TD20019
0 x 1.7 x 64	NK4D	TD20020
0 x 1.8 x 44	NK4D	TD20021
0 x 1.8 x 64	NK4D	TD20022
0 x 2 x 44	NK4D	TD20025
0 x 2 x 64	NK4D	TD20026
0 x 2.3 x 44	NK4D	TD20027
0 x 2.3 x 64	NK4D	TD20028
0 x 2.5 x 44	NK4D	TD20029
0 x 2.5 x 64	NK4D	TD20030
0 x 4 x 44	NK4D	TD20031
0 x 4 x 64	NK4D	TD20032
1 x 2.3 x 44	NK4D	TD20033
1 x 2.3 x 64	NK4D	TD20034
1 x 2.6 x 44	NK4D	TD20035
1 x 2.6 x 64	NK4D	TD20036
1 x 3 x 44	NK4D	TD20037
1 x 3 x 64	NK4D	TD20038
1 x 4 x 44	NK4D	TD20039
1 x 4 x 64	NK4D	TD20040
2 x 3.2 x 44	NK4D	TD20041
2 x 3.2 x 64	NK4D	TD20042
2 x 3 x 44	NK4D	TD20043
2 x 3 x 64	NK4D	TD20044
2 x 3.5 x 44	NK4D	TD20045
2 x 3.5 x 64	NK4D	TD20046
2 x 4 x 44	NK4D	TD20047
2 x 4 x 64	NK4D	TD20048
2 x 5 x 64	NK4D	TD20049
3 x 6 x 44	NK4D	TD20050

PLAIN SLOT



NK4DM




W x T x L	MODEL	PARTS No.
2 x 0.3 x 44	NK4DM	TD20051
2.5 x 0.3 x 44	NK4DM	TD20052
3 x 0.4 x 44	NK4DM	TD20053
4 x 0.5 x 44	NK4DM	TD20054

HEXAGON HEAD



NK4DX




H x L	MODEL	PARTS No.
1.5 x 44	NK4DX	TD20056
2 x 44	NK4DX	TD20057
2.5 x 44	NK4DX	TD20058
3 x 44	NK4DX	TD20059

HEX SOCKET



NK4DB

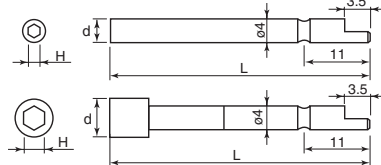


H x d x L	MODEL	PARTS No.
2.3 x 4 x 44	NK4DB	TD20061
2.5 x 4 x 44	NK4DB	TD20062
3 x 5 x 44	NK4DB	TD20063
4 x 6 x 44	NK4DB	TD20064
4.5 x 7 x 44	NK4DB	TD20065
5 x 7 x 44	NK4DB	TD20066
5.5 x 8 x 44	NK4DB	TD20067

HEXLOBU




NK4DT



T x d x L	MODEL	PARTS No.
2 x 1.5 x 44	NK4DT	TD20068
2 x 1.5 x 64	NK4DT	TD20069
3 x 1.7 x 44	NK4DT	TD20070
3 x 1.7 x 64	NK4DT	TD20071
4 x 1.8 x 44	NK4DT	TD20072
4 x 1.8 x 64	NK4DT	TD20073
5 x 2 x 44	NK4DT	TD20074
5 x 2 x 64	NK4DT	TD20075
6 x 2.5 x 44	NK4DT	TD20076
6 x 2.5 x 64	NK4DT	TD20077
8 x 3 x 44	NK4DT	TD20078
8 x 3 x 64	NK4DT	TD20079
10 x 3 x 44	NK4DT	TD20080
10 x 3 x 64	NK4DT	TD20081
15 x 4 x 44	NK4DT	TD20082
15 x 4 x 64	NK4DT	TD20083




NK4DST

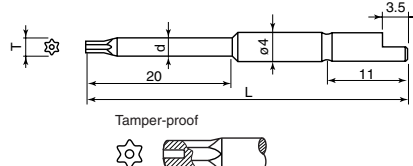

T x d x L	MODEL	PARTS No.
8H x 3 x 44	NK4DST	TD20084
8H x 3 x 64	NK4DST	TD20085
10H x 3 x 44	NK4DST	TD20086
10H x 3 x 64	NK4DST	TD20087
15H x 4 x 44	NK4DST	TD20088
15H x 4 x 64	NK4DST	TD20089

Tamper-proof






ø4mm SHANK DRIVE

☆ FOR : DELVO & HIOS

CROSS POINT



NK4DH

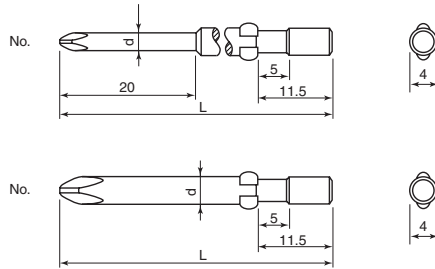


No. x d x L	MODEL	PARTS No.
00 x 1.2 x 40	NK4DH	TD20090
00 x 1.2 x 60	NK4DH	TD20091
00 x 1.5 x 40	NK4DH	TD20092
00 x 1.5 x 60	NK4DH	TD20093
00 x 1.7 x 40	NK4DH	TD20094
00 x 1.7 x 60	NK4DH	TD20095
00 x 2 x 40	NK4DH	TD20096
00 x 2 x 60	NK4DH	TD20097
00 x 3 x 40	NK4DH	TD20100
00 x 3 x 60	NK4DH	TD20101
00 x 4 x 40	NK4DH	TD20102
00 x 4 x 60	NK4DH	TD20103
0 x 1.2 x 40	NK4DH	TD20104
0 x 1.2 x 60	NK4DH	TD20105
0 x 1.4 x 40	NK4DH	TD20106
0 x 1.4 x 60	NK4DH	TD20107
0 x 1.5 x 40	NK4DH	TD20108
0 x 1.5 x 60	NK4DH	TD20109
0 x 1.7 x 40	NK4DH	TD20110
0 x 1.7 x 60	NK4DH	TD20111
0 x 1.8 x 40	NK4DH	TD20112
0 x 1.8 x 60	NK4DH	TD20113
0 x 2 x 40	NK4DH	TD20114
0 x 2 x 60	NK4DH	TD20115
0 x 2.3 x 40	NK4DH	TD20116
0 x 2.3 x 60	NK4DH	TD20117
0 x 2.5 x 40	NK4DH	TD20118
0 x 2.5 x 60	NK4DH	TD20119
0 x 3 x 40	NK4DH	TD20120
0 x 3 x 60	NK4DH	TD20121
0 x 4 x 40	NK4DH	TD20122
0 x 4 x 60	NK4DH	TD20123
1 x 1.7 x 40	NK4DH	TD20128
1 x 1.7 x 60	NK4DH	TD20129
1 x 2 x 40	NK4DH	TD20130
1 x 2 x 60	NK4DH	TD20131
1 x 2.3 x 40	NK4DH	TD20132
1 x 2.3 x 60	NK4DH	TD20133
1 x 2.5 x 40	NK4DH	TD20134
1 x 2.5 x 60	NK4DH	TD20135
1 x 2.6 x 40	NK4DH	TD20136
1 x 2.6 x 60	NK4DH	TD20137
1 x 3 x 40	NK4DH	TD20138
1 x 3 x 60	NK4DH	TD20139
1 x 4 x 40	NK4DH	TD20140
1 x 4 x 60	NK4DH	TD20141
2 x 3 x 40	NK4DH	TD20144
2 x 3 x 60	NK4DH	TD20145
2 x 3.2 x 40	NK4DH	TD20146
2 x 3.2 x 60	NK4DH	TD20147
2 x 3.5 x 40	NK4DH	TD20148
2 x 3.5 x 60	NK4DH	TD20149
2 x 4 x 40	NK4DH	TD20150
2 x 4 x 60	NK4DH	TD20151

PLAIN SLOT



NK4DHM



WxTxL	MODEL	PARTS No.
2 x 0.3 x 40	NK4DHM	TD20152
2.5 x 0.3 x 40	NK4DHM	TD20153
3 x 0.4 x 40	NK4DHM	TD20154
4 x 0.5 x 40	NK4DHM	TD20155

HEXAGON HEAD



NK4DHX




H x L	MODEL	PARTS No.
1.5 x 40	NK4DHX	TD20157
2 x 40	NK4DHX	TD20158
2.5 x 40	NK4DHX	TD20159
3 x 40	NK4DHX	TD20160

HEX SOCKET



NK4DHB




H x d x L	MODEL	PARTS No.
2.3 x 4 x 40	NK4DHB	TD20162
2.5 x 4 x 40	NK4DHB	TD20163
3 x 5 x 40	NK4DHB	TD20164
4 x 6 x 40	NK4DHB	TD20165
4.5 x 7 x 40	NK4DHB	TD20166
5 x 7 x 40	NK4DHB	TD20167
5.5 x 8 x 40	NK4DHB	TD20168

HEXLOBU




NK4DHT




H x d x L	MODEL	PARTS No.
2 x 1.5 x 40	NK4DHT	TD20169
2 x 1.5 x 60	NK4DHT	TD20170
3 x 1.7 x 40	NK4DHT	TD20171
3 x 1.7 x 60	NK4DHT	TD20172
4 x 1.8 x 40	NK4DHT	TD20173
4 x 1.8 x 60	NK4DHT	TD20174
5 x 2 x 40	NK4DHT	TD20175
5 x 2 x 60	NK4DHT	TD20176
6 x 2.5 x 40	NK4DHT	TD20177
6 x 2.5 x 60	NK4DHT	TD20178
8 x 3 x 40	NK4DHT	TD20179
8 x 3 x 60	NK4DHT	TD20180
10 x 3 x 40	NK4DHT	TD20181
10 x 3 x 60	NK4DHT	TD20182
15 x 4 x 40	NK4DHT	TD20183
15 x 4 x 60	NK4DHT	TD20184



NK4DHST







H x d x L	MODEL	PARTS No.
8H x 3 x 40	NK4DHST	TD20185
8H x 3 x 60	NK4DHST	TD20186
10H x 3 x 40	NK4DHST	TD20187
10H x 3 x 60	NK4DHST	TD20188
15H x 4 x 40	NK4DHST	TD20189
15H x 4 x 60	NK4DHST	TD20190




ø5mm HEX SHANK DRIVE

☆ FOR: DELVO, HIOS, HITACHI, MATSUSHITA, URYU, YOKOTA

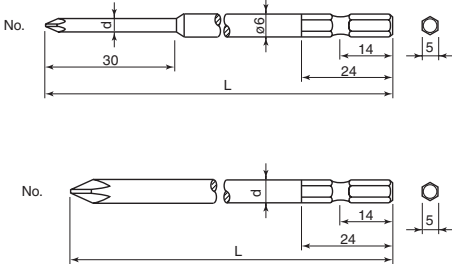CROSS POINT		No. x d x L	MODEL	PARTS No.
 NK31 		0 x 3 x 70	NK31	TD20191
		0 x 3 x 100	NK31	TD20192
		1 x 4 x 70	NK31	TD20193
		1 x 4 x 100	NK31	TD20194
		1 x 4 x 120	NK31	TD20195
		1 x 5 x 70	NK31	TD20196
		1 x 5 x 100	NK31	TD20197
		1 x 5 x 120	NK31	TD20198
		1 x 6 x 70	NK31	TD20200
		1 x 6 x 100	NK31	TD20201
		1 x 6 x 120	NK31	TD20202
		1 x 6 x 150	NK31	TD20203
		1 x 6 x 200	NK31	TD20204
		1 x 6 x 250	NK31	TD20205
		1 x 6 x 300	NK31	TD20206
		2 x 4 x 70	NK31	TD20207
		2 x 4 x 100	NK31	TD20208
		2 x 4 x 120	NK31	TD20209
		2 x 5 x 70	NK31	TD20210
		2 x 5 x 100	NK31	TD20211
		2 x 5 x 120	NK31	TD20212
		2 x 6 x 70	NK31	TD20214
		2 x 6 x 100	NK31	TD20215
		2 x 6 x 120	NK31	TD20216
		2 x 6 x 150	NK31	TD20217
		2 x 6 x 200	NK31	TD20218
		2 x 6 x 250	NK31	TD20219
		2 x 6 x 300	NK31	TD20220
		3 x 6 x 75	NK31	TD20221
		3 x 6 x 100	NK31	TD20222
 NK16 		1 x 70	NK16	TD20224
		1 x 100	NK16	TD20225
		1 x 120	NK16	TD20226
		1 x 150	NK16	TD20227
		1 x 200	NK16	TD20228
		1 x 250	NK16	TD20229
		1 x 300	NK16	TD20230
		2 x 70	NK16	TD20232
		2 x 100	NK16	TD20233
		2 x 120	NK16	TD20234
		2 x 150	NK16	TD20235
		2 x 200	NK16	TD20236
		2 x 250	NK16	TD20237
		2 x 300	NK16	TD20238
		3 x 70	NK16	TD20240
		3 x 100	NK16	TD20241
		3 x 150	NK16	TD20242
		3 x 200	NK16	TD20243
PLAIN SLOT		T x L	MODEL	PARTS No.
 NK31M 		0.9 x 50	NK31M	TD20244
		0.9 x 70	NK31M	TD20245
		0.9 x 100	NK31M	TD20246
		0.9 x 120	NK31M	TD20247
		0.9 x 150	NK31M	TD20248
		0.9 x 200	NK31M	TD20249

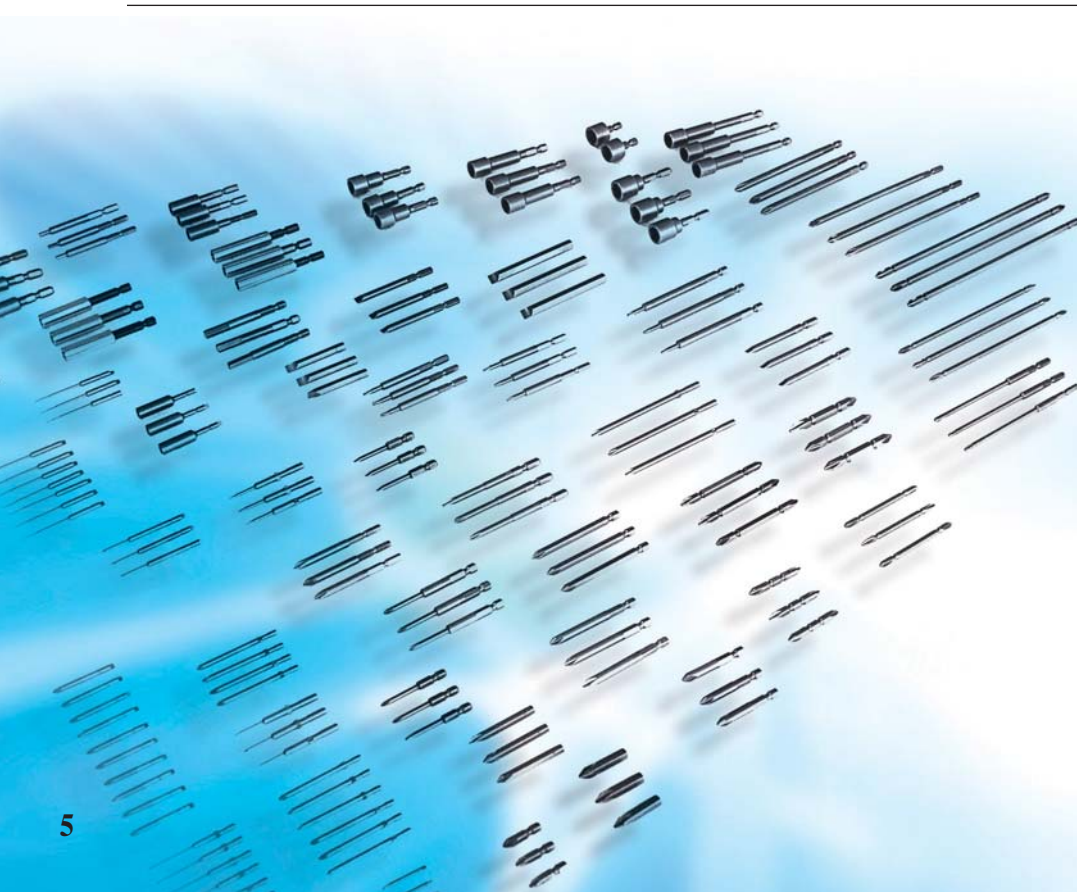





Ø6.35mm HEX SHANK DRIVE

FOR : AGE, PRO, ATRAS-COPCO, BIA, B&D, BOSCH, BUCKEY-TOOLS, CHICAGO-PNEUMATIC, CLECO, DELVO, HIOS, HITACHI, INGARSOLL, KELLER, MAKITA, MALL, METABO, NPK, PNEUTEC, PREMAG, ROCKWELL, ROTOR-TOOL, SKIL, STANLEY, STAR, STAYER, THOR, TONICHI, URYU, VAN-DORN, VIRAX, WOLF, YOKOTA, YUTANI

CROSS POINT




NK35




No. x d x L	MODEL	PARTS No.
1 x 4 x 75	NK35	TD20306
1 x 4 x 100	NK35	TD20307
1 x 7 x 50	NK35	TD20308
1 x 7 x 75	NK35	TD20309
1 x 7 x 100	NK35	TD20310
1 x 7 x 120	NK35	TD20311
1 x 7 x 150	NK35	TD20312
1 x 7 x 200	NK35	TD20313
1 x 7 x 250	NK35	TD20314
1 x 7 x 300	NK35	TD20315
2 x 4 x 50	NK35	TD20316
2 x 4 x 75	NK35	TD20317
2 x 4 x 100	NK35	TD20318
2 x 7 x 50	NK35	TD20319
2 x 7 x 75	NK35	TD20320
2 x 7 x 100	NK35	TD20321
2 x 7 x 120	NK35	TD20322
2 x 7 x 150	NK35	TD20323
2 x 7 x 200	NK35	TD20324
2 x 7 x 250	NK35	TD20325
2 x 7 x 300	NK35	TD20326
3 x 7 x 50	NK35	TD20327
3 x 7 x 75	NK35	TD20328
3 x 7 x 100	NK35	TD20329
3 x 7 x 120	NK35	TD20330
3 x 7 x 150	NK35	TD20331
3 x 7 x 200	NK35	TD20332
3 x 7 x 250	NK35	TD20333
3 x 7 x 300	NK35	TD20334
0 x 3.8 x 50	NK36	TD20335
1 x 3.8 x 50	NK36	TD20336
2 x 3.8 x 50	NK36	TD20337
2 x 4.5 x 50	NK36	TD20338



NK36



NK36




1 x 23 (No. x L)	NK36	TD20339
1 x 30	NK36	TD20340
1 x 40	NK36	TD20341
1 x 50	NK36	TD20342
1 x 75	NK36	TD20343
2 x 23	NK36	TD20344
2 x 30	NK36	TD20345
2 x 40	NK36	TD20346
2 x 50	NK36	TD20347
2 x 75	NK36	TD20348
3 x 23	NK36	TD20349
3 x 30	NK36	TD20350
3 x 40	NK36	TD20351
3 x 50	NK36	TD20352
3 x 75	NK36	TD20353
1 x 50	NK15	TD20354
1 x 75	NK15	TD20355
1 x 100	NK15	TD20356
1 x 120	NK15	TD20357
1 x 150	NK15	TD20358
1 x 200	NK15	TD20359
1 x 250	NK15	TD20360
1 x 300	NK15	TD20361
2 x 50	NK15	TD20362
2 x 75	NK15	TD20363
2 x 100	NK15	TD20364
2 x 120	NK15	TD20365
2 x 150	NK15	TD20366
2 x 200	NK15	TD20367
2 x 250	NK15	TD20368
2 x 300	NK15	TD20369
3 x 50	NK15	TD20370
3 x 75	NK15	TD20371
3 x 100	NK15	TD20372
3 x 120	NK15	TD20373
3 x 150	NK15	TD20374
3 x 200	NK15	TD20375
3 x 250	NK15	TD20376
3 x 300	NK15	TD20377

PLAIN SLOT



NK35M




W x T x L	MODEL	PARTS No.
7 x 0.9 x 50	NK35M	TD20378
7 x 0.9 x 75	NK35M	TD20379
7 x 0.9 x 100	NK35M	TD20380
3.8 x 0.6 x 50	NK36M	TD20381

HEXAGON HEAD




NK35X







H x d x L	MODEL	PARTS No.
1.27 x 3 x 70	NK35X	TD20382
1.27 x 3 x 100	NK35X	TD20383
1.27 x 3 x 150	NK35X	TD20384
1.5 x 3 x 70	NK35X	TD20385
1.5 x 3 x 100	NK35X	TD20386
1.5 x 3 x 150	NK35X	TD20387
2 x 3 x 70	NK35X	TD20388
2 x 3 x 100	NK35X	TD20389
2 x 3 x 150	NK35X	TD20390
2.5 x 70 (H x L)	NK35X	TD20391
2.5 x 100	NK35X	TD20392
2.5 x 150	NK35X	TD20393
3 x 70	NK35X	TD20394
3 x 100	NK35X	TD20395
3 x 150	NK35X	TD20396
4 x 70	NK35X	TD20397
4 x 100	NK35X	TD20398
4 x 150	NK35X	TD20399
5 x 50	NK35X	TD20400
5 x 70	NK35X	TD20401
5 x 100	NK35X	TD20402
5 x 150	NK35X	TD20403
6 x 50	NK35X	TD20404
6 x 70	NK35X	TD20405
6 x 100	NK35X	TD20406
6 x 150	NK35X	TD20407
8 x 70	NK35X	TD20408
8 x 100	NK35X	TD20409
8 x 150	NK35X	TD20410



NK35X





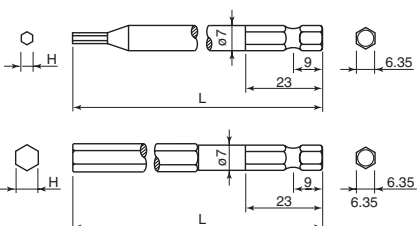



HEX SOCKET		H x D x d x L	MODEL	PARTS No.
 NK35BN		5 x 8 x 3.5 x 55	NK35BN	TD20411
		5 x 8 x 3.5 x 75	NK35BN	TD20412
		5 x 8 x 3.5 x 100	NK35BN	TD20413
		5 x 8 x 3.5 x 150	NK35BN	TD20414
		5 x 8 x 3.5 x 200	NK35BN	TD20415
		5.5 x 9 x 4 x 55	NK35BN	TD20416
		5.5 x 9 x 4 x 75	NK35BN	TD20417
		5.5 x 9 x 4 x 100	NK35BN	TD20418
		5.5 x 9 x 4 x 150	NK35BN	TD20419
		5.5 x 9 x 4 x 200	NK35BN	TD20420
		6 x 10 x 4.5 x 55	NK35BN	TD20421
		6 x 10 x 4.5 x 75	NK35BN	TD20422
		6 x 10 x 4.5 x 100	NK35BN	TD20423
		6 x 10 x 4.5 x 150	NK35BN	TD20424
		6 x 10 x 4.5 x 200	NK35BN	TD20425
		7 x 11 x 5.5 x 55	NK35BN	TD20426
		7 x 11 x 5.5 x 75	NK35BN	TD20427
		7 x 11 x 5.5 x 100	NK35BN	TD20428
		7 x 11 x 5.5 x 150	NK35BN	TD20429
		7 x 11 x 5.5 x 200	NK35BN	TD20430
		8 x 13 x 6 x 55	NK35BN	TD20431
		8 x 13 x 6 x 75	NK35BN	TD20432
		8 x 13 x 6 x 100	NK35BN	TD20433
		8 x 13 x 6 x 150	NK35BN	TD20434
		8 x 13 x 6 x 200	NK35BN	TD20435
		9 x 13 x 6.5 x 55	NK35BN	TD20436
		9 x 13 x 6.5 x 75	NK35BN	TD20437
		9 x 13 x 6.5 x 100	NK35BN	TD20438
		9 x 13 x 6.5 x 150	NK35BN	TD20439
		9 x 13 x 6.5 x 200	NK35BN	TD20440
		10 x 16 x 8 x 55	NK35BN	TD20441
		10 x 16 x 8 x 75	NK35BN	TD20442
		10 x 16 x 8 x 100	NK35BN	TD20443
		10 x 16 x 8 x 150	NK35BN	TD20444
		10 x 16 x 8 x 200	NK35BN	TD20445
		11 x 16 x 9 x 55	NK35BN	TD20446
		11 x 16 x 9 x 75	NK35BN	TD20447
		11 x 16 x 9 x 100	NK35BN	TD20448
		11 x 16 x 9 x 150	NK35BN	TD20449
		11 x 16 x 9 x 200	NK35BN	TD20450
		12 x 18 x 9 x 55	NK35BN	TD20451
		12 x 18 x 9 x 75	NK35BN	TD20452
		12 x 18 x 9 x 100	NK35BN	TD20453
		12 x 18 x 9 x 150	NK35BN	TD20454
		12 x 18 x 9 x 200	NK35BN	TD20455
13 x 19 x 10 x 55	NK35BN	TD20456		
13 x 19 x 10 x 75	NK35BN	TD20457		
13 x 19 x 10 x 100	NK35BN	TD20458		
13 x 19 x 10 x 150	NK35BN	TD20459		
13 x 19 x 10 x 200	NK35BN	TD20460		
14 x 20 x 11 x 55	NK35BN	TD20461		
14 x 20 x 11 x 75	NK35BN	TD20462		
14 x 20 x 11 x 100	NK35BN	TD20463		
14 x 20 x 11 x 150	NK35BN	TD20464		
14 x 20 x 11 x 200	NK35BN	TD20465		
17 x 24 x 13 x 55	NK35BN	TD20466		
17 x 24 x 13 x 75	NK35BN	TD20467		
17 x 24 x 13 x 100	NK35BN	TD20468		
17 x 24 x 13 x 150	NK35BN	TD20469		
17 x 24 x 13 x 200	NK35BN	TD20470		
 NK35B		5 x 8 x 32 (H x D x L)	NK35B	TD20471
		5.5 x 9 x 32	NK35B	TD20472
		6 x 10 x 32	NK35B	TD20473
		7 x 11 x 32	NK35B	TD20474
		8 x 13 x 32	NK35B	TD20475
		9 x 13 x 32	NK35B	TD20476
		10 x 16 x 32	NK35B	TD20477
		12 x 18 x 32	NK35B	TD20478
HEX LOBU		T x d x L	MODEL	PARTS No.
 NK35T		8 x 3 x 75	NK35T	TD20480
		8 x 3 x 100	NK35T	TD20481
		10 x 3.6 x 75	NK35T	TD20482
		10 x 3.6 x 100	NK35T	TD20483
		15 x 4.3 x 75	NK35T	TD20484
		15 x 4.3 x 100	NK35T	TD20485
		20 x 5 x 75	NK35T	TD20486
		20 x 5 x 100	NK35T	TD20487
		25 x 5.5 x 75	NK35T	TD20488
		25 x 5.5 x 100	NK35T	TD20489
		30 x 6.5 x 75	NK35T	TD20490
		30 x 6.5 x 100	NK35T	TD20491
		40 x 7 x 75	NK35T	TD20492
		40 x 7 x 100	NK35T	TD20493



ø6.35mm HEX SHANK DRIVE

☆ FOR: HITACHI, MAKITA, MATSUSHITA, MAX, RYOBI, TONICHI, TOSHIBA, VESSEL, YOKOTA, YUTANI

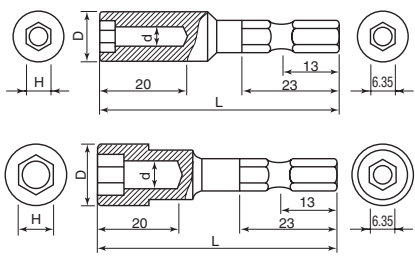CROSS POINT		No. x d x L	MODEL	PARTS No.	
	NK39		0 x 3 x 30 x 75	NK39	TD20494
			1 x 3 x 30 x 75	NK39	TD20495
			1 x 5 x 35 x 82	NK39	TD20496
			2 x 3 x 30 x 75	NK39	TD20497
			2 x 5 x 35 x 82	NK39	TD20498
	NK12		1 x 45 (No. x L)	NK12	TD20499
			1 x 65	NK12	TD20500
			1 x 75	NK12	TD20501
			1 x 110	NK12	TD20502
			1 x 150	NK12	TD20503
			1 x 200	NK12	TD20504
			1 x 250	NK12	TD20505
			1 x 300	NK12	TD20506
			2 x 45	NK12	TD20507
			2 x 65	NK12	TD20508
			2 x 75	NK12	TD20509
			2 x 110	NK12	TD20510
			2 x 150	NK12	TD20511
			2 x 200	NK12	TD20512
			2 x 250	NK12	TD20513
			2 x 300	NK12	TD20514
			3 x 45	NK12	TD20515
			3 x 65	NK12	TD20516
			3 x 75	NK12	TD20517
			3 x 110	NK12	TD20518
			3 x 150	NK12	TD20519
			3 x 200	NK12	TD20520
			3 x 250	NK12	TD20521
			3 x 300	NK12	TD20522
PLAIN SLOT		T x L	MODEL	PARTS No.	
	NK39M		0.8 x 45	NK39M	TD20523
			0.8 x 75	NK39M	TD20524
HEX SOCKET		H x D x d x L	MODEL	PARTS No.	
	NK39BN		4 x 7 x 3 x 55	NK39BN	TD20525
			4.5 x 7 x 3 x 75	NK39BN	TD20526
			5 x 8 x 3.5 x 55	NK39BN	TD20527
			5.5 x 9 x 4 x 55	NK39BN	TD20528
			6 x 10 x 4.5 x 55	NK39BN	TD20529
			7 x 11 x 5.5 x 55	NK39BN	TD20530
			8 x 13 x 6 x 55	NK39BN	TD20531
			9 x 13 x 6.5 x 55	NK39BN	TD20532
			10 x 16 x 8 x 55	NK39BN	TD20533
			11 x 16 x 9 x 55	NK39BN	TD20534
			12 x 18 x 9 x 55	NK39BN	TD20535
			13 x 19 x 10 x 55	NK39BN	TD20536
			14 x 20 x 11 x 55	NK39BN	TD20537
			17 x 24 x 13 x 55	NK39BN	TD20538
			1/4in x 11 x 5.5 x 55	NK39BN	TD20539
			3/8in x 16 x 8 x 55	NK39BN	TD20540
HEXLOBU		T x d x L	MODEL	PARTS No.	
	NK39T		8 x 3 x 65	NK39T	TD20542
			8 x 3 x 110	NK39T	TD20543
			10 x 3.6 x 65	NK39T	TD20544
			10 x 3.6 x 110	NK39T	TD20545
			15 x 4.3 x 65	NK39T	TD20546
			15 x 4.3 x 110	NK39T	TD20547
			20 x 5 x 65	NK39T	TD20548
			20 x 5 x 110	NK39T	TD20549
			25 x 5.5 x 65	NK39T	TD20550
			25 x 5.5 x 110	NK39T	TD20551
			30 x 6.5 x 65	NK39T	TD20552
			30 x 6.5 x 110	NK39T	TD20553
			40 x 7 x 65	NK39T	TD20554
			40 x 7 x 110	NK39T	TD20555




ø5mm SHANK DRIVE

FOR : HIOS

CROSS POINT



NK5H

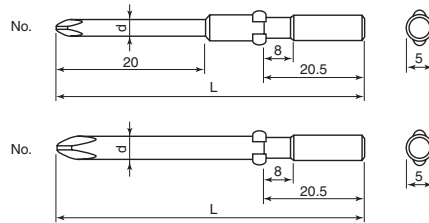


No. x d x L	MODEL	PARTS No.
00 x 1.5 x 60	NK5H	TD20556
00 x 1.5 x 80	NK5H	TD20557
00 x 1.5 x 100	NK5H	TD20558
00 x 1.5 x 120	NK5H	TD20559
00 x 2 x 60	NK5H	TD20560
00 x 2 x 80	NK5H	TD20561
00 x 2 x 100	NK5H	TD20562
00 x 2 x 120	NK5H	TD20563
00 x 2.5 x 60	NK5H	TD20564
00 x 2.5 x 80	NK5H	TD20565
00 x 2.5 x 100	NK5H	TD20566
00 x 2.5 x 120	NK5H	TD20567
00 x 3 x 60	NK5H	TD20568
00 x 3 x 80	NK5H	TD20569
00 x 3 x 100	NK5H	TD20570
00 x 3 x 120	NK5H	TD20571
00 x 5 x 60	NK5H	TD20572
00 x 5 x 80	NK5H	TD20573
00 x 5 x 100	NK5H	TD20574
00 x 5 x 120	NK5H	TD20575
0 x 1.5 x 60	NK5H	TD20576
0 x 1.5 x 80	NK5H	TD20577
0 x 1.5 x 100	NK5H	TD20578
0 x 1.5 x 120	NK5H	TD20579
0 x 2 x 60	NK5H	TD20580
0 x 2 x 80	NK5H	TD20581
0 x 2 x 100	NK5H	TD20582
0 x 2 x 120	NK5H	TD20583
0 x 2.5 x 60	NK5H	TD20584
0 x 2.5 x 80	NK5H	TD20585
0 x 2.5 x 100	NK5H	TD20586
0 x 2.5 x 120	NK5H	TD20587
1 x 2 x 60	NK5H	TD20592
1 x 2 x 80	NK5H	TD20593
1 x 2 x 100	NK5H	TD20594
1 x 2 x 120	NK5H	TD20595
1 x 2.5 x 60	NK5H	TD20596
1 x 2.5 x 80	NK5H	TD20597
1 x 2.5 x 100	NK5H	TD20598
1 x 2.5 x 120	NK5H	TD20599
1 x 3 x 60	NK5H	TD20600
1 x 3 x 80	NK5H	TD20601
1 x 3 x 100	NK5H	TD20602
1 x 3 x 120	NK5H	TD20603
1 x 5 x 60	NK5H	TD20604
1 x 5 x 80	NK5H	TD20605
1 x 5 x 100	NK5H	TD20606
1 x 5 x 120	NK5H	TD20607
2 x 3 x 60	NK5H	TD20620
2 x 3 x 80	NK5H	TD20621
2 x 3 x 100	NK5H	TD20622
2 x 3 x 120	NK5H	TD20623
2 x 3.5 x 60	NK5H	TD20624
2 x 3.5 x 80	NK5H	TD20625
2 x 3.5 x 100	NK5H	TD20626
2 x 3.5 x 120	NK5H	TD20627
2 x 4 x 60	NK5H	TD20628
2 x 4 x 80	NK5H	TD20629
2 x 4 x 100	NK5H	TD20630
2 x 4 x 120	NK5H	TD20631
2 x 5 x 60	NK5H	TD20632
2 x 5 x 80	NK5H	TD20633
2 x 5 x 100	NK5H	TD20634
2 x 5 x 120	NK5H	TD20635

HEXLOBU



NK5HT

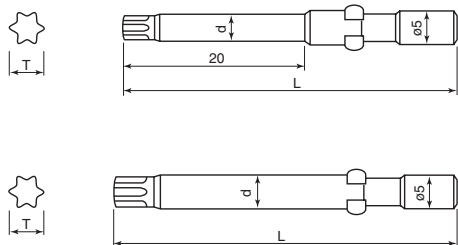

T x d x L	MODEL	PARTS No.
3 x 1.7 x 60	NK5HT	TD20636
3 x 1.7 x 80	NK5HT	TD20637
3 x 1.7 x 100	NK5HT	TD20638
3 x 1.7 x 120	NK5HT	TD20639
4 x 1.8 x 60	NK5HT	TD20640
4 x 1.8 x 80	NK5HT	TD20641
4 x 1.8 x 100	NK5HT	TD20642
4 x 1.8 x 120	NK5HT	TD20643
5 x 2 x 60	NK5HT	TD20644
5 x 2 x 80	NK5HT	TD20645
5 x 2 x 100	NK5HT	TD20646
5 x 2 x 120	NK5HT	TD20647
6 x 2.5 x 60	NK5HT	TD20648
6 x 2.5 x 80	NK5HT	TD20649
6 x 2.5 x 100	NK5HT	TD20650
6 x 2.5 x 120	NK5HT	TD20651
8 x 3 x 60	NK5HT	TD20652
8 x 3 x 80	NK5HT	TD20653
8 x 3 x 100	NK5HT	TD20654
8 x 3 x 120	NK5HT	TD20655
10 x 3 x 60	NK5HT	TD20656
10 x 3 x 80	NK5HT	TD20657
10 x 3 x 100	NK5HT	TD20658
10 x 3 x 120	NK5HT	TD20659
15 x 4 x 60	NK5HT	TD20660
15 x 4 x 80	NK5HT	TD20661
15 x 4 x 100	NK5HT	TD20662
15 x 4 x 120	NK5HT	TD20663

NK BIT

NK Bits exclusively for air and electric screwdrivers !

