




Gruppi compressori d'aria

Air compressor pumps

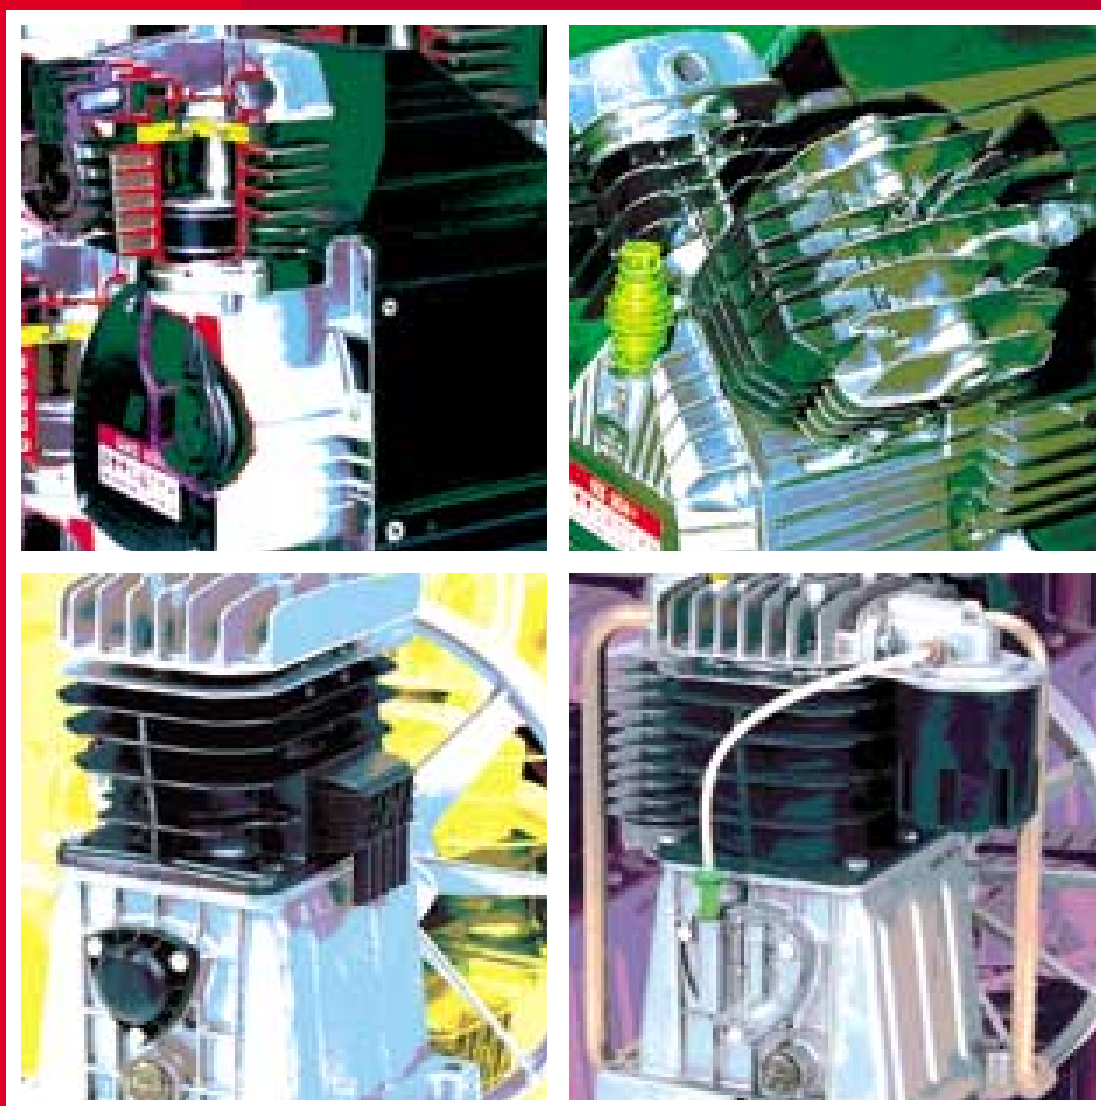

GR/1

Legenda / Symbols

	I Autolubrificato GB Selflubricated F Autolubrifié	D Ölfrei E Autolubricado P Auto-lubrificado	NL Zelfsmerend S Självsmörjande DK Selvsurt	SF Itsevoiteleva RUS С автоматической смазкой CN 無油
	I Gruppo GB Pump F Groupe	D Aggregat E Bomba P Cabeçote	NL Pomp S Pump DK Enhed	SF Yksikkö RUS Насосный агрегат CN 機頭
	I Cilindri/stadi GB Cylinders/stages F Cylindres/étages	D Zylinder / Stufen E Cilindros/etapas P Cilindros/estágios	NL Cilinders/stadia S Cylindrar/nivåer DK Cylindre/faser	SF Sylinterit/vaihe RUS Цилиндры/ступени CN 中缸
	I Aria aspirata (1 m ³ = 1.000 litri) GB Air displacement (1 cu. m. = 1.000 liters) F Air aspiré (1 m ³ = 1.000 litres)	D Ansaugleistung (1 m ³ = 1.000 Liter) E Aire aspirado (1 m ³ = 1.000 litros) P Ar aspirado (1 m ³ = 1.000 litros)	NL Inlaatlucht (1 m ³ = 1,000 liter) S Cylindervolym (1 kb = 1,000 liter) DK Indsugt luft (1 m ³ = 1,000 l)	SF Imetty ilma (1 m ³ ~ 1,000 litraa) RUS Всасываемый воздух (1 куб.м - 1.000 литров) CN 排氣量 (1m ³ =1000升)
	I Aria resa GB F.A.D. F Débit	D Liefermenge E Caudal de aire P Ar entregado	NL Netto lucht opbrengst S Frittluftflöde DK Effektiv luft	SF Vapaa tuotto RUS Выброс воздуха CN 排氣量
	I Pressione massima di lavoro GB Max. working pressure F Pression maximum de fonctionnement	D Maximaler Arbeitsdruck E Presión máxima de trabajo P Pressão máxima de trabalho	NL Maximale bedrijfsdruk S Max. arbetstryck DK Maks. arbejdstryk	SF Maksimityöpain RUS Полное рабочее давление CN 最大工作壓力
	I Potenza resa GB Output power F Puissance en sortie	D Abgegebene Leistung E Potencia producida P Potência fornecida	NL Nuttig vermogen S Uteffekt DK Nettoeffekt	SF Antoteho RUS Отдаваемая мощность CN 輸出功率
	I Giri al minuto GB Rounds per minute F Tours par minute (min-1)	D Umdrehungen pro Minute E Revoluciones por minuto P R.P.M.	NL Toerental per minuut S Varv per minut DK Omdr./min.	SF Kierrosta minuutissa RUS Оборотов в минуту CN 每分鐘轉速
	I Peso lordo GB Gross weight F Poids brut	D Bruttogewicht E Peso bruto P Peso bruto	NL Bruttogewicht S Brutto vikt DK Bruttovægt	SF Bruttopaino RUS Вес брутто CN 毛重
	I Peso netto GB Net weight F Poids net	D Netto Gewicht E Peso neto P Peso líquido	NL Nettogewicht S Nettovikt DK Netto vægt	SF Nettopaino RUS Вес нетто CN 净重
	I Cubatura m ³ GB Cubic meters F Cubage m ³	D Kubikmeter E Metros cúbicos P Cubicagem m ³	NL Kubieke meter S Kubikmeter DK Kubikmeter (m ³)	SF Tilavuus m ³ RUS Объем в кубометрах CN 體積



I Con protezione termica automatica • **GB** With automatic thermal protection • **F** Avec protection thermique automatique • **D** Automatischer Thermoschalter
E Con protección térmica automática • **P** Com protecção térmica automática • **NL** Met automatische thermische beveiliging • **S** Med automatisk överhettningsskydd • **DK** Med automatisk termisk beskyttelse • **SF** Automaattisella lämpösuojalla • **RUS** С автоматической тепловой защитой
CN 帶自動式熱保護器



I Con protezione termica a riarmo manuale • **GB** With manual reset thermal protection • **F** Avec protection thermique à réarmage manuel
D Thermoschalter mit manueller Rücksetzung • **E** Con protección térmica de restauración manual • **P** Com protecção térmica a rearme manual
NL Met thermische beveiliging met handmatige reset • **S** Med manuellt inställt överhettningsskydd • **DK** Med termisk beskyttelse med manuel tilbage stilling • **SF** Manuaalisesti nollattavalla lämpösuojalla • **RUS** С тепловой защитой с ручным сбросом • **CN** 帶手動式熱保護器



I Disponibile versione a 400 Volt trifase • **GB** Available in 400 V three-phase • **F** Disponible en version V 400/50HZ/3PH • **D** Verfügbare ausführung mit 400 Volt-Drei-Phásig • **E** Disponible version a 400 Volt trifásico • **P** Disponivel versao em 400 Volts trifasico • **NL** Beschikbaar vanaf 400 V / 3 ~
S Tillgänglig även i 400 V trefäs • **DK** Kan også fås i tre faser 400 V. • **SF** Saatavana myös 400 V kolme-vaiheisena • **RUS** Предлагается в варианте на 400 Вольт три фазы • **CN** 可供的400V三相电压工程




130

Elettrocompressori a membrana

- Compatti e leggeri
- Completi di raccordo per attacchi a baionetta

Diaphragm compressors

- Light and compact
- Complete with fittings for bayonet type joints



CE




Type	Volt/Hz	Cod.	Watt	/min	C.F.M.	m³/h	bar	max psi	Kg
130/1	230/50/1	6001300220	270	70	2,5	4,2	4	58	5,5
130/2	12 dc	6001300012	100	51	1,8	3	3,1	45	3,9
130/3	24 dc	6001300024	100	51	1,8	3	3,1	45	3,9



GMS

Gruppi compressori coassiali autolubrificati

Direct driven selflubricated pumps



CE



Type	Volt/Hz	Cod.	Cil./St.	/min	C.F.M.	m³/h	bar	psi	HP	kW	min-1	Kg
GMS 100	230/50/1△	2010501000	1/1	100	3,5	6	8	116	0,75	0,56	1450	11
GMS 105	115/60/1△	2010511000	1/1	103	3,6	6,2	8	116	0,75	0,56	1750	11
GMS 105	220/60/1△	2010551000	1/1	103	3,6	6,2	8	116	0,75	0,56	1750	11
GMS 150	230/50/1▲	2021500000	1/1	150	5,3	9	8	116	1,5	1,1	1450	17
GMS 180	115/60/1▲	2021701000	1/1	187	6,6	11,2	8	116	2	1,5	1750	17
GMS 180	220/60/1▲	2021721000	1/1	187	6,6	11,2	8	116	2	1,5	1750	17


	L	P	H
GMS 100	338/13.2	180/6.9	285/11.2
GMS 150	345/13.5	280/11	340/13.2



VS 204

Gruppi compressori coassiali autolubrificati

Direct driven selflubricated pumps

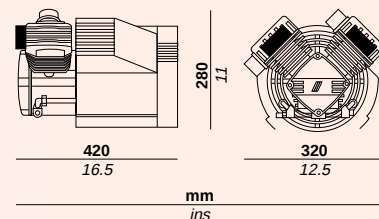

CE




Type	Volt/Hz	Cod.	Cil./St.	/min	C.F.M.	m³/h	bar	psi	HP	kW	min-1	Kg
VS 204	230/50/1▲	2025202000	2/1	200	7	12	8	116	2	1,5	1450	25
VS 204	400/50/3▲	2025212000	2/1	200	7	12	8	116	2	1,5	1450	24
VS 244	115/60/1▲	2025552000	2/1	249	8,8	14,9	8	116	2	1,5	1750	24
VS 244	220/60/1▲	2025562000	2/1	249	8,8	14,9	8	116	2	1,5	1750	24
VS 254	230/50/1▲	2025830000	2/1	241	8,5	14,5	8	116	2	1,5	1450	26



F

Gruppi compressori coassiali
autolubrificati

*Direct driven selflubricated
pumps*



CE




Type	Volt/Hz	Cod.	Cil./St.	/min	C.F.M.	m³/h	bar	psi	HP	kW	min-1	Kg
F 114	230/50/1△	2010190000	1/1	105	3,7	6,3	8	116	1	0,75	1450	10
F 205	230/50/1△	2010120000	1/1	205	7,3	12,3	8	116	1,5	1,1	2850	8

GM 202

GM 215

Gruppi compressori coassiali
lubrificati

Direct driven lubricated pumps



CE



Type	Volt/Hz	Cod.	Cil./St.	/min	C.F.M.	m³/h	bar	psi	HP	kW	min-1	Kg
GM 202	230/50/1 △	2016000000	1/1	170	6	10,3	8	116	1,5	1,1	2850	7,5
GM 215	115/60/1 △	2016030000	1/1	201	7,1	12,1	8	116	1,5	1,1	3450	8
GM 215	220/60/1 △	2016020000	1/1	201	7,1	12,1	8	116	1,5	1,1	3450	8




CE

GM

Gruppi compressori coassiali
lubrificati

Direct driven lubricated pumps




	L	P	H
GM 110 - GM 191	335/13	180/6.9	280/11
GM 201	335/13	185/7.2	290/11.3
GM 243	331/13	175/6.9	295/11.5
GM 260	345/13.5	280/11	340/13.2
GM 300	380/14.8	190/7.4	310/12

Type	Volt/Hz	Cod.	Cil./St.	~/min	C.F.M.	m³/h	bar	psi	HP	kW	min-1	Kg
GM 110/15 bar	230/50/1 Δ	2011261000	1/1	85	3	5,1	15	218	0,75	0,56	1450	13
GM 192	230/50/1 Δ	2012030000	1/1	190	6,7	11,4	8	116	1,5	1,1	2850	12
GM 130	115/60/1 Δ	2011470000	1/1	130	4,6	7,8	8	116	1	0,75	1750	13
GM 130	220/60/1 Δ	2011220000	1/1	130	4,6	7,8	8	116	1	0,75	1750	13
GM 201	230/50/1 Δ	2011500000	1/1	189	6,7	11,3	8	116	1,5	1,1	2850	11
GM 212	115/60/1 Δ	2016030000	1/1	201	7,1	12,1	8	116	1,5	1,1	3450	11
GM 212	220/60/1 Δ	2016020000	1/1	201	7,1	12,1	8	116	1,5	1,1	3450	11
GM 193	230/50/1 Δ	2012140000	1/1	240	8,4	14,4	8	116	2	1,5	2850	12
GM 250	115/60/1 Δ	2012501000	1/1	231	8,2	13,9	8	116	2	1,5	3450	13
GM 250	220/60/1 Δ	2012580000	1/1	231	8,2	13,9	8	116	2	1,5	3450	13
GM 260	230/50/1 Δ ✕	2022500000	1/1	260	9,1	15,6	8	116	2	1,5	2850	18
GM 180	115/60/1 Δ ✕	2022900000	1/1	174	6,2	10,4	8	116	2	1,5	1750	18
GM 180	220/60/1 Δ ✕	2022910000	1/1	174	6,2	10,4	8	116	2	1,5	1750	18
GM 244	230/50/1 Δ	2012770000	1/1	285	10	17	8	116	2,5	1,5	2850	13
GM 300	230/50/1 Δ ✕	3017500000	1/1	285	10	17	10	145	2,5	1,8	2850	14
GM 310	115/60/1 Δ	2017510000	1/1	285	10	17	10	145	2,5	1,8	3450	14

VX

Gruppi compressori coassiali
lubrificati

Direct driven lubricated pumps

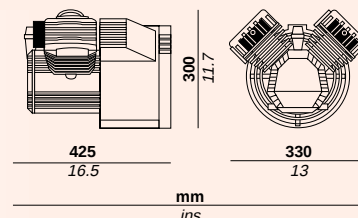

CE

Type	Volt/Hz	Cod.	Cil./St.	~/min	C.F.M.	m³/h	bar	psi	HP	kW	min-1	Kg
VX 254	230/50/1▲ ✕	2026001000	2/1	250	8,8	15	10	145	2	1,5	1450	21
VX 304	230/50/1▲ ✕	2027001000	2/1	300	10,5	18	10	145	2,5	1,8	1450	25
VX 402	230/50/1▲ ✕	2024202000	2/1	400	14	24	10	145	3	2,25	2850	24
VX 234	115-220/60/1▲ ✕	2023301000	2/1	239	8,4	14,3	10	145	1,75	1,3	1750	21

Gruppi compressori d'aria


Air compressor pumps



AB 245
AB 335
AB 410
AB 510

**Gruppi compressori a cinghia
lubrificati**


Belt driven oil lubricated pumps



	L	P	H
AB 245	300/11.8	261/10.3	356/14
AB 335	300/11.8	261/10.3	356/14
AB 410	350/13.8	300/11.8	400/15.8
AB 510	350/13.8	300/11.8	400/15.8

CE

POTENZA CONSIGLIATA
RECOMM. POWER




Type	Cod.	HP	kW	Cil./St.	/min	C.F.M.	m³/h	/min	C.F.M.	m³/h	bar	psi	min-1	mm	ins.	Kg
AB 245	3020431000	2	1,5	2/1	248	8,8	14,9	147	5,2	8,8	10	145	1240	300x1A	12,8x1A	7
AB 335	3020441000	3	2,25	2/1	307	10,8	18,4	217	6,2	13	10	145	1540	300x1A	12,8x1A	7
AB 410	3020391000	3	2,25	2/1	397	14	23,8	292	10,3	17,5	10	145	1210	350x1-3V	13,78x1 SPZ	12
AB 510	3020401000	4	3	2/1	482	17	28,9	363	12,8	21,8	10	145	1470	350x1-3V	13,78x1 SPZ	12



AB 450 - AB 550
AB 671 - AB 901
AB 851 - AB 951
AB 981 - AB 1000

**Gruppi compressori a cinghia
lubrificati**

Belt driven oil lubricated pumps



	L	P	H
AB 450-AB 550	400/15.8	330/13.0	440/17.3
AB 671-AB 901	400/15.8	350/13.8	500/19.7
AB 851-AB 951	430/16.9	350/13.8	515/20.3
AB 981	430/16.9	350/13.8	515/20.3
AB 1000	530/20.9	430/16.9	600/23.6

CE

POTENZA CONSIGLIATA
RECOMM. POWER




Type	Cod.	HP	kW	Cil./St.	/min	C.F.M.	m³/h	/min	C.F.M.	m³/h	bar	psi	min-1	mm	ins.	Kg
AB 450	3020501000	4	3	2/2	450	16	27	350	12,5	21	10	145	1150	400x1SPZ	15,8x1-3V	17
AB 550	3020521000	5,5	4	2/2	550	19,5	33	440	15,5	26,4	10	145	1400	400x1SPZ	15,8x1-3V	17
AB 671	3020811000	5,5	4	2/2	650	23	39	520	18,5	31,2	10	145	1000	400x1SPZ	15,8x1-3V	31
AB 671/14	3020831000	5,5	4	2/2	530	19,5	33	440	15,5	26,4	14	203	800	400x1SPZ	15,8x1-3V	31
AB 901	3020760000	5,5	4	2/2	634	22,4	38	495	17,5	29,7	10	145	800	400x1SPZ	15,8x1-3V	37
AB 851	3020791000	7,5	5,5	2/2	830	29,3	50	640	22,5	38,5	10	145	1280	430x2A	16,9x2A	34
AB 851/14	3020841000	7,5	5,5	2/2	650	23	39	520	18,5	31,2	14	203	1000	430x2A	16,9x2A	34
AB 951	3020980000	7,5	5,5	2/2	777	27,4	46,6	602	21,3	36	10	145	1090	430x2A	16,9x2A	37
AB 981	3020980000	10	7,5	2/2	912	32,2	54,7	675	23,8	40,5	10	145	1280	430x2A	16,9x2A	37
AB 1000	3020600000	10	7,5	2/2	1050	37,8	63	840	30	50	10	145	1080	530x2A	20,9x2A	58
AB 1000/14	3020610000	10	7,5	2/2	900	32,4	54	720	25,7	43,2	14	203	850	530x2A	20,9x2A	58
AB 1500	3021000000	15	11	2/2	1400	49,5	84,0	1130	39,9	67,8	10	145	1400	530x2A	20,9x2A	58
Gruppi con controllo automatico livello olio / Pumps with automatic oil level control																
AB 901	3020931000	5,5	4	2/2	634	22,4	38,0	495	17,5	29,7	10	145	800	430x2A	16,9x2A	37
AB 951	3020581000	7,5	5,5	2/2	777	27,4	46,6	602	21,3	36	10	145	1090	430x2A	16,9x2A	37
AB 901 AP	3021010000	5,5	4	2/2	452	16	27,1	353	12,5	21,2	14	203	635	430x2A	16,9x2A	37
AB 951 AP	3021020000	7,5	5,5	2/2	552	19,5	33,1	431	15,1	25,9	14	203	775	430x2A	16,9x2A	37



CCS

Basamento

Base



	L	P	H
CCS 245	510/20.1	310/12.2	340/13.4
CCS 335	510/20.1	330/13.0	340/13.4

CE


Type	Volt/Hz	Cod.	Grup./Pump	Cil./St.	/min	C.F.M.	m³/h	bar	psi	HP	kW	min-1	Kg
CCS 245	230/50/1Δ ✕	2030722000	AB 245	2/1	248	8,8	14,9	10	145	2	1,5	1240	26
CCS 335	230/50/1Δ ✕	2031400000	AB 335	2/1	307	10,8	18,4	10	145	3	2,25	1470	27



ABB

Basamento

Base

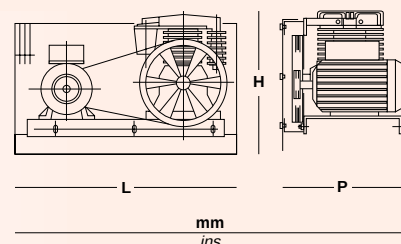

	L	P	H
ABB 335	520/20.5	360/14.2	370/14.6
ABB 410	570/22.4	350/13.8	400/15.8
ABB 510	750/29.6	400/15.8	460/18.1
ABB 480 - ABB 550	760/29.5	400/15.8	520/20.5
ABB 670	750/29.6	400/15.8	590/23.2
ABB 850	840/33.1	430/16.9	590/23.2
ABB 1000	1050/41.3	460/18.1	660/26.0

CE

Type	Volt/Hz	Cod.	Grup./Pump	Cil./St.	/min	C.F.M.	m³/h	bar	psi	HP	kW	min-1	Kg
ABB 335	230/50/1 ✕	2031450000	AB 335	2/1	307	10,8	18,4	10	145	3	2,25	1540	29
ABB 410	400/50/3	2031321000	AB 410	2/1	397	14	23,8	10	145	3	2,25	1210	38
ABB 510	400/50/3	2031330000	AB 510	2/1	482	17	28,9	10	145	4	3	1470	40
ABB 480	400/50/3	2030460000	AB 450	2/2	480	16,9	28,8	10	145	4	3	1200	55
ABB 550	400/50/3	2030390000	AB 550	2/2	550	18,4	33	10	145	5,5	4	1400	60
ABB 671	400/50/3	2030940000	AB 671	2/2	650	23	39	10	145	5,5	4	1000	70
ABB 851	400/50/3	2030950000	AB 851	2/2	830	29,3	50	10	145	7,5	5,5	1280	75
ABB 1000	400/50/3	2030710000	AB 1000	2/2	1050	37,8	63	10	145	10	7,5	1080	95



Staffa Bracket

Staffa di posizionamento a terra per basamento ABB
Floor positioning bracket for ABB base

Type	Cod.
ABB 245-335-410-510	751.812.0000
ABB 480-550-671-851-1000	751.808.0000



Sistema di gestione della qualità certificato
UNI EN ISO 9001:2000

Quality system certified according to
UNI EN ISO 9001:2000



FIAC SpA, nell'ottica di migliorare costantemente i prodotti, si riserva di aggiornare le caratteristiche presenti in questo catalogo.

To guarantee the continued improvement of our range of products, FIAC reserves the right to up-date the technical characteristics shown in this catalogue without prior warning.

I requisiti dei prodotti sono indicati chiaramente.
Le immagini sono puramente indicative.

Specifications of products are clearly indicated. Photographs are for illustrative purposes only.



ANIMA®



ASSOCIAZIONE COSTRUTTORI
POMPE E COMPRESSORI
ITALIAN ASSOCIATION OF
PUMP AND COMPRESSOR
MANUFACTURERS

www.fiac.it

cod. 9998720000 - 09/04

FIAC in the world

FIAC Italy

FIAC Air Compressors S.p.A.
Via Vizzano, 23
40044 Pontecchio Marconi (Bologna) - Italy
Tel.: +39 051 678 68 11
Fax: +39 051 84 52 61
e-mail: fiac@fiac.it
www.fiac.it

FIAC Russia

FIAC Rus
B.Cherkizovskaya, 24A
107553 Moscow-Russia
Tel.e Fax +7 095 5407806
e-mail: fiac-east@astelit.ru
www.fiacrus.com

FIAC Brazil

FIAC Compressores de Ar do Brasil Ltda
Rua Jorge Fernandes Mattos n.181
cep 14.808.162
Araraquara S.P. - Brasil
Tel.: +55 16 33848080
Fax: +55 16 2821394
e-mail: fiac@fiacbrasil.com.br
www.fiacbrasil.com.br

FIAC UK

Wilkinson Star Ltd.
Shield Drive
Wardley Industrial Estate - Worsley
Manchester M28 2WD - England
Tel.: +44 (0) 161 793 8127
Fax: +44 (0) 161 727 8297
e-mail: fiac.sales@wilkinsonstar.com
www.wilkinsonstar.com

FIAC China

FIAC Air Compressors (Hong Kong) Ltd.
Room 1510 - Eastern Harbour Centre, 28
Hoi Chak Street - Quarry Bay - Hong Kong
Tel.: +852 2868 1098
Fax: +852 2840 0303
e-mail: info@fiac.com.cn

FIAC Poland

Warehouse Wolny Obszar
Celny UL Portowa 28
44100 Gliwice - Poland
Tel.: +48 322304943
Fax: +48 322319776



FIAC Italy